

## Cisco Compact EGC GaN Segmentable Node A90201

The Cisco® Compact EGC GaN Segmentable Node A90201 is designed to meet the growing need for network segmentation. The node provides advanced features and benefits, helps operators reduce operating costs by streamlining node segmentation deployments and configuration, and is well suited for migration toward Fiber to the Curb (FTTC) and Fiber to the Building (FTTB) architectures.

The node makes use of the latest developments in GaN (Gallium Nitride) monolithic microwave integrated circuits (MMICs), bringing excellent RF performance at a lower power consumption (compared to GaAs technology). It can be configured electronically for rapid initial setup or for adjustments that are needed as network requirements shift. All settings can be done without service interruption, an especially important capability in networks that deliver real-time interactive services such as Voice over IP (VoIP) and high-speed data transmission. The node's interface allows easy configuration through a handheld programmer terminal or by connection to a standard PC. This interface allows the settings to be stored and reapplied to streamline configuration.

The node provides flexible options because of its large optical input range and high RF output level. Thus, it can work with a large variety of reverse transmitters to support a variety of applications within the network.

The number of plug-ins has been minimized to help operators keep inventory and costs down. The full-range electronic attenuators and equalizers offer improved versatility and make it possible to achieve the same adjustment range as with conventional plug-ins or potentiometer solutions. A plug-in diplexer filter is used to determine the forward/reverse band split.

To meet future demands for more bandwidth, the node offers an electronic 862-MHz to 1-GHz field-programmable bandwidth extension, and reverse path that can be upgraded to 200 MHz.

The Cisco Compact EGC GaN Segmentable Node A90201 can be configured with a Cisco status monitoring transponder (Status Monitoring and Control [SMC], Hybrid Management System [HMS], or DOCSIS) to enable remote monitoring of critical node parameters and remote control of the built-in 3-state reverse switch.

**Figure 1.** Cisco Compact EGC GaN Segmentable Node A90201




## Features

- Improved distortion at a lower power consumption with GaN-based output stages
- RF output level adjustable over a wide range: 94 to 119 dBμV
- Wide optical input: -7 to +2 dBm
- Configurable for 1 GHz or 862 MHz operation
- Configured by Electronic Gain Control (EGC) technology
- Full segmentable in forward path and reverse path
- Automatic redundancy switching for forward path
- Easy setup and control


## Product Diagrams

Figures 2, 3, and 4 provide an overview and block diagrams for the Cisco Compact EGC GaN Segmentable Node A90201.


**Figure 2.** Overview

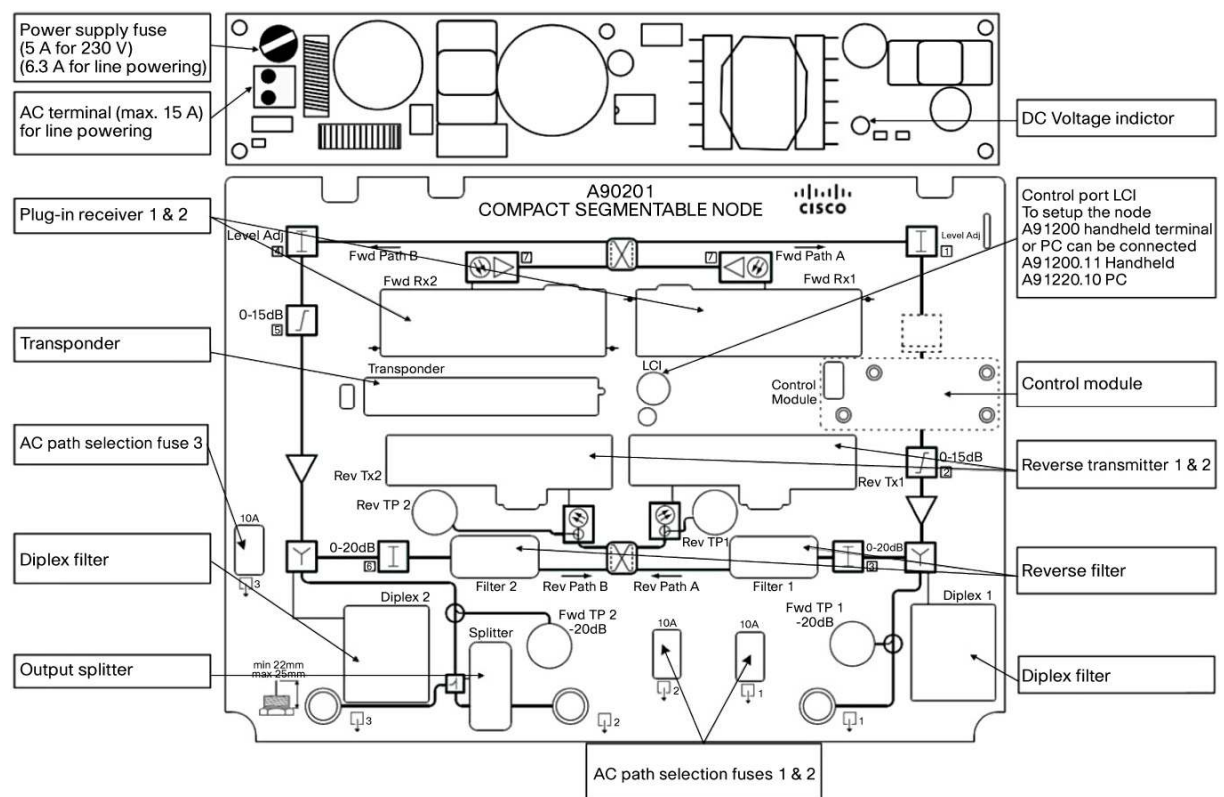

**Figure 3.** Block Diagram (with RTX)

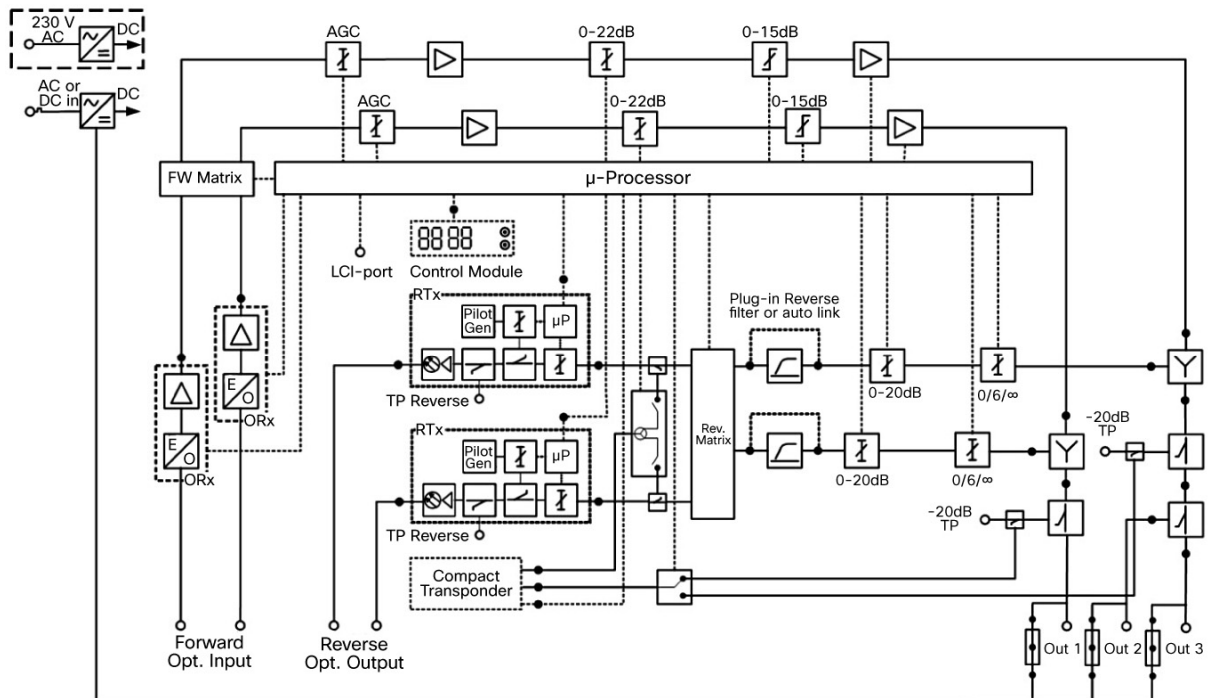

**Figure 4.** Block Diagram (with EDR TX)

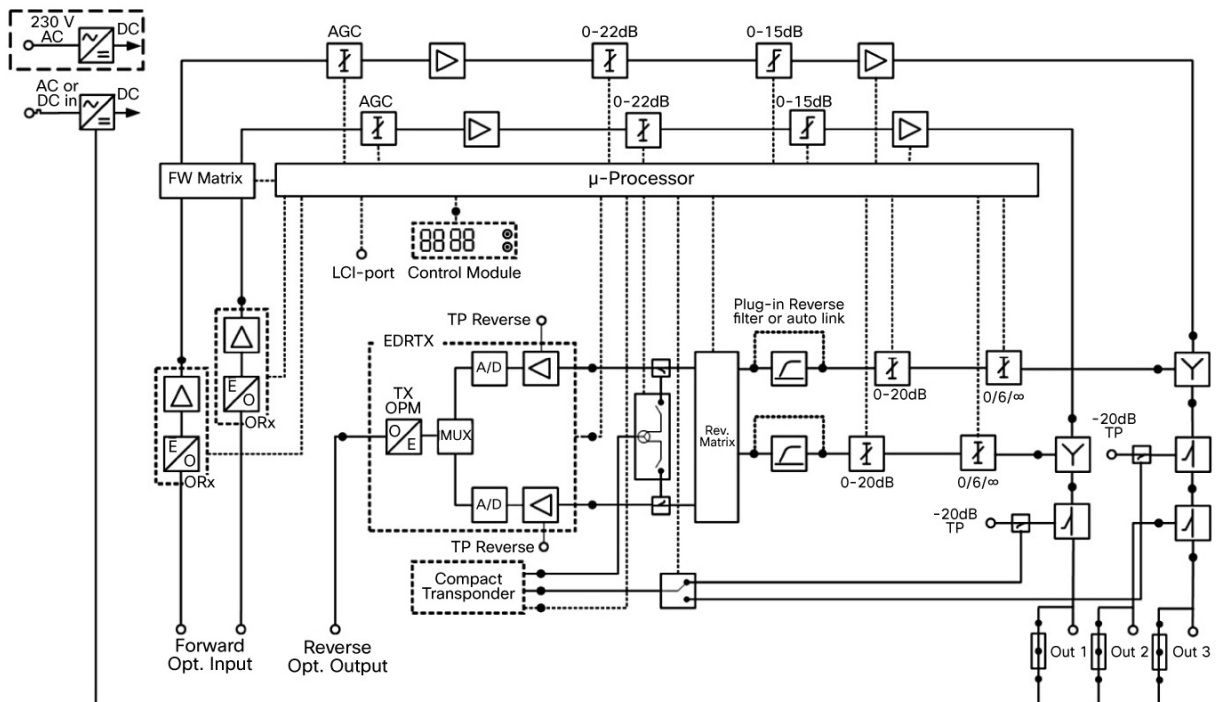

## Product Specifications

This section provides product specifications. Table 1 lists optical specifications, Tables 2 and 3 give forward and reverse RF specifications, and Table 4 lists station powering specifications. Table 5 provides environmental, mechanical, compliance, and safety specifications.

**Table 1.** Optical Specifications

Item	Value
<b>Optical</b>	
Optical wavelength	1200-1600 nm
Optical input level	-7 to +2 dBm
AGC accuracy	$\leq \pm 0.5$ dB
Equivalent Input Noise (EIN) current	6 pA/ $\sqrt{\text{Hz}}$ at 86-606 MHz 7 pA/ $\sqrt{\text{Hz}}$ at 86-862 MHz 8 pA/ $\sqrt{\text{Hz}}$ at 86-1006 MHz

**Table 2.** Forward RF Specifications

Item	Value
<b>Forward RF<sup>1</sup></b>	
Frequency range	Selectable 86-862 MHz or 86-1006 MHz
Output level range	94-119 dB $\mu$ V at 3.25% OMI per ch
Responsivity	67.25 $\pm$ 0.5 dB A/W at full gain, 1310 nm
Flatness	$\leq \pm 0.75$ dB at 86-862 MHz $\leq \pm 1.0$ dB at 86-1006 MHz
Interstage tilt	0-15 dB, 0.5 dB step
Path to path isolation	$\geq +60$ dB at 86-862 MHz $\geq +55$ dB at 862-1006 MHz
Output return loss	$\geq 18$ dB at 5-65 MHz, reduce 1.5 dB per octave
Output test point return loss	$\geq 20$ dB at 5-65 MHz, reduce 1.5 dB per octave
Output test point	-20 $\pm$ 0.5 dB at 86-862 MHz, -20 $\pm$ 0.75 dB at 86-1006 MHz
Distortion <sup>2</sup>	
• CTB	$\leq -60$ dB
• CSO	$\leq -60$ dB
Distortion <sup>3</sup> (with power saving on)	
CTB	$\leq -60$ dB
CSO	$\leq -60$ dB
Hum modulation <sup>4</sup>	$\leq -65$ dB at 86-1006 MHz
Thermal stability	$\leq \pm 1.0$ dB
Redundant receiver switchover time	$\leq 25$ ms
Number of optical inputs	2
Number of RF output ports	2 active outputs + 1 additional output with plug-in output splitter
Group delay	$\Delta f = 1$ MHz $\leq 3$ nsec at 86-94 MHz $\leq 2$ nsec at 95-112 MHz
	$\Delta f = 4.43$ MHz $\leq 2$ nsec at 112.25-116.68 MHz $\leq 1$ nsec > 119.25 MHz


Item	Value
<b>Transponder pick-off point<sup>5</sup></b>	-33 ±1.5 dB
<b>Notes:</b> 1. Unless otherwise specified, all forward band specifications are tested with a 65/86 diplexer module installed. 2. CENELEC 42 ch, 3.25% OMI, 9 dB tilt, and output level 116 dBµV. 3. CENELEC 42 ch, 3.25% OMI, 9 dB tilt, and output level 113 dBµV. 4. At 8 Ampere AC current. 5. Relative to the level of the node output port.	

**Table 3.** Reverse RF Specifications

Item	Value
<b>Reverse RF<sup>1</sup></b>	
<b>Frequency range</b>	5-200 MHz
<b>Tilt</b>	Slope < 1.0 dB
<b>Flatness</b>	≤ ±0.5 dB
<b>Path to path isolation</b>	70 dB
<b>Input return loss</b>	≥ 18 dB at 5-65 MHz, reduce 1.5 dB per octave
<b>RTx test point return loss</b>	≥ 18 dB at 5-65 MHz, reduce 1.5 dB per octave
<b>RTx test point</b>	Refer to the RTx data sheet, part number 7018738, when RTx is installed Refer to the EDR data sheet, part number 95-7024051-01, when EDR is installed
<b>Hum modulation<sup>4</sup></b>	≤ -65 dB at 5-65 MHz
<b>Reverse input attenuator</b>	0-20 dB, 0.5 dB step
<b>Reverse tri-state switch</b>	On, -6 dB, Off
<b>Thermal stability</b>	≤ ±0.7 dB
<b>Redundant transmitter switchover time</b>	≤ 25 ms
<b>Group delay</b>	Δf = 1 MHz ≤ 12 nsec at 5-6 MHz ≤ 7 nsec at 6-7 MHz ≤ 5 nsec at 7-8 MHz ≤ 3 nsec at 8-64 MHz ≤ 4 nsec at 64-65 MHz
<b>Insertion loss<sup>2</sup></b>	≤ 5.0 dB
<b>Insertion loss of transponder Injection point<sup>3</sup></b>	30 ±1.5 dB
<b>Notes:</b> 1. Unless otherwise specified, all reverse band specifications are tested with a 65/86 diplexer module installed. 2. From RF port to the reverse transmitter input, input attenuator at 0 dB and tri-state switch at ON setting. 3. From the transponder's RF output to the reverse transmitter's input. 4. At 8 Ampere AC current.	

**Table 4.** Station Powering Specifications

Item	Value
<b>Power Supply</b>	
<b>65V remote powered</b>	24-65 VAC
<b>230V mains powered</b>	100-240 VAC
<b>Powering</b>	
<b>Maximum AC current</b>	15A at power supply input

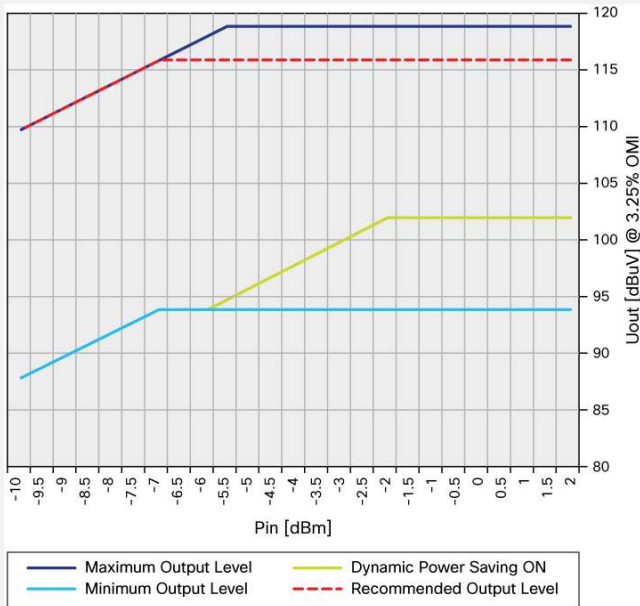Item	Value									
Maximum AC current per port	8A									
Power Consumption										
Power consumption <sup>1</sup>	1 Tx, 1 Rx, 1 transponder ≤ 49.5W					2 Tx, 2 Rx, 1 transponder ≤ 54.0W				
Power reduction:										
• Power saving on	2.2W									
• Dynamic power saving <sup>2</sup>	6.8W per path									
• Redundancy mode	2.2W									
• Single output mode	21.3W									
Control module power consumption	0.5W									
Transponder	≤ 2.0W (HMS/SMC transponder) ≤ 2.5W (DOCSIS transponder)									
AC Current vs AC Voltage										
AC input voltage	24V	30V	35V	40V	45V	50V	55V	60V	65V	
AC current draw (A) (1 Tx, 1 Rx, 1 transponder)	2.31	1.88	1.60	1.41	1.27	1.14	1.05	0.98	0.95	
AC current draw (A) (2 TX, 2 Rx, 1 transponder)	3.20	2.40	2.03	1.82	1.61	1.43	1.32	1.24	1.15	
Notes:										
1. Segmented mode; power saving mode off.										
2. The availability of the dynamic power saving depends on the combination of the optical input level and the RF output level as shown in the following graph.										
<div></div>										

**Table 5.** Environmental, Mechanical, Compliance, and Safety Specifications

Item	Value
Environmental	
Operating Temperature	-40 to +55 °C (-40 to +131 °F)
Storage Temperature	-40 to +85 °C (-40 to +185 °F)
Water/Dust Ingress Rating	IP67

Item	Value
<b>Mechanical</b>	
<b>Connectors</b> <ul style="list-style-type: none"> <li>Optical</li> <li>RF</li> </ul>	SC/APC PG11
<b>Housing Dimensions (H x W x D)</b>	293 mm x 292 mm x 125 mm (11.5 in. x 11.5 in. x 4.9 in.)
<b>Weight</b>	8 kg (17.6 lb)
<b>Compliance/Safety</b>	
<b>Electrical Safety</b>	EN 50083-1, EN 60065, IEC 60065
<b>Laser Safety</b>	IEC/EN 60825-1
<b>EMC Emissions</b>	EN 50083-2
<b>RoHS</b>	Directive 2002/95/EC on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment, O.J. (L 19)

## Ordering Information

This section contains ordering information for the node (Table 6) and required and optional accessories. Consult your account representative to determine the best configuration for your particular application.

**Table 6.** Cisco Compact EGC GaN Segmentable Node A90201 Part Numbers

Description	Part Number for Ordering
<b>Compact EGC GaN Segmentable Node, 1 Rx, 1 GHz, AGC, 230 VAC, 65/86 MHz</b>	A90201.102
<b>Compact EGC GaN Segmentable Node, 1 Rx, 1 GHz, AGC, 65 VAC, 65/86 MHz</b>	A90201.103

The **required accessories** listed in Table 7 must be ordered separately.

**Table 7.** Required Accessories and Part Numbers

Description	Part Number for Ordering
Output Splitter - 1 required, choose from the following:	
<ul style="list-style-type: none"> <li>0 dB jumper</li> </ul>	A74069.10
<ul style="list-style-type: none"> <li>3.5/3.5 dB splitter</li> </ul>	A77041.10
<ul style="list-style-type: none"> <li>2/6 dB directional coupler</li> </ul>	A77042.10
<ul style="list-style-type: none"> <li>1/10.5 dB directional coupler</li> </ul>	A77043.10
<ul style="list-style-type: none"> <li>0.6/14 dB directional coupler</li> </ul>	A77044.10
Reverse Transmitter (1 or 2) or EDR Module (only 1), choose from the following:	
<ul style="list-style-type: none"> <li>Reverse Transmitter for Compact Nodes, FP 0 dBm</li> </ul>	A90080.10
<ul style="list-style-type: none"> <li>Reverse Transmitter for Compact Nodes, CWDM 3 dBm (1270 nm to 1610 nm)</li> </ul>	A90083.10yyyy
<ul style="list-style-type: none"> <li>Reverse Transmitter for Compact Nodes, CWDM 6 dBm (1270 nm to 1610 nm)</li> </ul>	A90086.10yyyy
<ul style="list-style-type: none"> <li>EDR C2185 Tx module with CWDM Tx OPM (1270 nm up to 1610 nm)</li> </ul>	4042891.yyyy
<ul style="list-style-type: none"> <li>EDR C2185 Tx module with DWDM Tx (ITU ch. 17 up to ch. 61)</li> </ul>	4042892.yy
<ul style="list-style-type: none"> <li>EDR C2185 Tx module without Optical Pluggable Module (OPM) (require 1 OPM)               <ul style="list-style-type: none"> <li>3 dBm CWDM Tx OPM (1270 nm to 1610 nm)</li> <li>3 dBm DWDM Tx OPM (ITU ch. 17 to ITU ch. 61)</li> </ul> </li> </ul>	4042889 4042872.yyyy 4042872.yy

Optical Adapter		
Internal optical connector is SC/APC, choose from the following:		
• Adapter SC/APC to E2108		A90540.1048
• Adapter SC/APC to FC/APC		A90540.1068
• Adapter SC/APC to SC/APC		A90540.1088

The **optional accessories** listed in Table 8 must be ordered separately.

**Table 8.** Optional Accessories and Part Numbers

Description	Part Number on Module	Part Number for Ordering
Transponder, choose from below:		
<ul style="list-style-type: none"><li>• Plug-in Euro-DOCSIS/DOCSIS Transponder</li><li>• Plug-in Compact SMC Transponder</li><li>• Plug-in Compact HMS Transponder</li><li>• Plug-in Compact HMS Transponder with EDR</li></ul>	4038489	4038498 A91051.12 A91065.10 A91065.11
Handheld Terminal (required for configuration of the unit)		A91200.11
PC Configuration Kit (software and USB-cable)		A91220.10
Plug-in Diplex Filter - 2 required, choose from the following (included in the part numbers listed in Table 6):		
<ul style="list-style-type: none"><li>• 42/54 MHz split (left)</li><li>• 42/54 MHz split (right)</li><li>• 65/86 MHz split (left)</li><li>• 65/86 MHz split (right)</li><li>• 85/105 MHz split (left)</li><li>• 85/105 MHz split (right)</li></ul>	4028316 4028317	4008154 4008155 589690 589691 4044038 40440397
Single Reverse Filter - 1 required for each RTx, 2 required for EDR, choose from below:		
<ul style="list-style-type: none"><li>• Single low pass filter 65 MHz</li><li>• Single band pass filter 15/65 MHz</li><li>• Single high pass filter 11/15 MHz</li><li>• Single high pass filter 85 MHz</li><li>• Single high pass filter 15/85 MHz</li></ul>		A75127.1065 A75127.101565 A75127.101115 A75127.1085 A75127.101585
Optical Receiver	4026169	4033722
Control Module	4026179	4034246
Kit, AC Path Selection Fuse 8 A Time Delay, Black Handle (1 Kit=10 pcs of 715123)		4043258
Kit, AC Path Selection Fuse 10 A Mini-Blade, Black Handle (1 Kit=4 pcs of 4036557)		4036876
Sleeve PG11 - 5/8 in. with O-ring (included in the part numbers listed in Table 6)		744576



Americas Headquarters  
Cisco Systems, Inc.  
San Jose, CA

Asia Pacific Headquarters  
Cisco Systems (USA) Pte. Ltd.  
Singapore

Europe Headquarters  
Cisco Systems International BV Amsterdam,  
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)