

Prisma D-PON System ONT and Upstream Receiver

The Cisco® Prisma® D-PON System is a fiber-to-the-home (FTTH) solution specifically designed for RF and DOCSIS® based service providers. This system provides the benefits of a FTTH passive optical network (PON) while maintaining existing HFC back-office systems such as the billing support system (BSS), operations support system (OSS), broadcast video, narrowcast video, switched digital video, VOD, DOCSIS data, DOCSIS VOIP, and VDOC. The D-PON system allows for incremental FTTH growth on an adaptable, low-maintenance architecture, while using the existing back-office infrastructure and cable-friendly customer premise equipment (CPE).

The solution consists of the following components:

- Prisma D-PON 1550 nm Downstream Transmitter (data sheet part number 7016765)
- Prisma EDFA Optical Amplifier (data sheet part number 7016765)
- Prisma D-PON Optical Network Terminal (ONT)
- Prisma D-PON Upstream Receiver
- Prisma D-PON WDM LGX Modules (data sheet part number 7017620)

The Prisma D-PON Upstream Receiver and ONT supply the upstream optical signal for the Prisma D-PON solution. The Prisma D-PON ONT also provides the downstream and upstream optical to electrical conversion at the subscriber premise for connectivity to the CPE.

Figure 1. Prisma D-PON ONT (Left) and Upstream Receiver (Right)



Applications


- Residential FTTH (RF video, DOCSIS voice and DOCSIS data)
- MDU FTTH (RF video, DOCSIS voice and DOCSIS data)
- RF Video overlay for Commercial xPON

Primary Features

- 1 GHz full loading (78 Analog / 75 QAM at -6 dB) downstream
- CNR 48 dB at -3.5 dBm received power (typical)
- Enables 28 dB PON upstream link budget at 1310 nm (26 dB at 1610 nm)
- Supports DOCSIS 3.0 four-channel 64 QAM upstream channel bonding
- Multiple receiver setup and control options via Intelligent Communications Interface Module (ICIM)

System Diagram

Figure 2. Prisma D-PON System Diagram

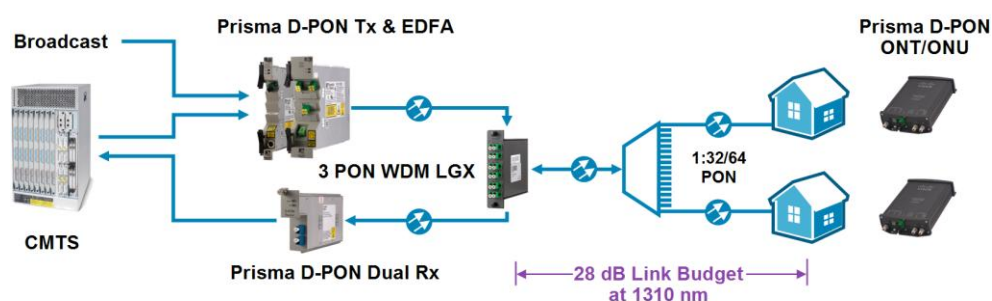

Environmental Note

This ONT does not include a weatherproof enclosure. Outdoor installation requires an additional enclosure that adequately protects against solid objects and liquids.

Product Specifications

Table 1. Prisma iW-2030 Wideband ONT

Specification	Value	Comments
Optical		
Downstream Rx Wavelength	1535 to 1565 nm	
Downstream Optical Input AGC Range	-4.5 to +2.5 dBm	
Downstream Photodiode Responsivity, minimum	0.88 A/W	
Upstream Tx Wavelength	1610 nm	
Upstream Optical Output Power (ONT)	3.0 dBm	
Optical Connection	1 SC/APC	
Electrical		
Downstream RF Bandwidth	52 to 1002 MHz (NA) 86 to 1002 MHz (EU)	
Downstream RF Output Level at 547.25 MHz, nominal	+15 dBmV, using nominal transmitter input level	
Downstream RF Output Tilt	+4.5 dB	52 to 1002 MHz
Upstream RF Bandwidth	5 to 42 MHz (NA) 5 to 65 MHz (EU)	
Upstream RF Input Level	30 dBmV/ch (nominal)	

Product Specifications (continued)

Specification	Value	Comments
RF Connections	1 female F-type connector(main RF) 1 female F-type connector (-10 dB test)	5 to 1002 MHz
LEDs	1 Power ON 1 Receive Power 1 Upstream Laser ON	
DC Power Consumption	6 W DC (maximum)	
DC Connections	1 female F-type connector (12 VDC) 1 DC jack connector (12 VDC) 1 twisted-pair connector (12 VDC)	
DC Supply Voltage Range	11.5 to 15.0 VDC	
Environmental		
Operating Temperature	-4 to 140°F (-20 to 60°C)	Following a 5-minute power-up.
Storage Temperature	-40 to 185°F (-40 to 85°C)	
Operating Humidity	5 to 95% (non-condensing)	
Mechanical		
Dimensions (W x H x D)	9.4 in. x 5.75 in. x 1.88 in. (23.9 cm x 14.6 cm x 4.8 cm)	
Weight	1.5 lbs (0.7 kg)	

Table 2. Prisma D-PON iW-2030 Wideband Upstream Dual Optical Receiver

Specification	Value	Comments
Optical		
Wavelength	1260 to 1360 nm / 1603 to 1617 nm	
Optical Input Range	-17 to -23 dBm	
Optical Input Connections	2 LC/APC	
Electrical		
Bandwidth	5 to 65 MHz	
RF Output Level	20 dBmV/ch (nominal)	
RF Output Return Loss	16 dB	
Number of RF Outputs	2 (1 per optical input)	Prisma II or Prisma XD chassis
LEDs	1 On 1 Alarm	
DC Power Consumption	≤ 7.5 W DC	
Environmental		
Operating Temperature	32 to 122°F (0 to 50°C)	
Storage Temperature	-40 to 180°F (-40 to 85°C)	
Operating Humidity	5 to 95% (non-condensing)	
Mechanical		
Dimensions (W x H x D)	1.03 in x 3.5 in. x 8.8 in. (2.6 cm x 8.9 cm x 22.4 cm)	
Weight	0.9 lbs (0.4 kg)	


Product Specifications (continued)

Table 3. Prisma D-PON Upstream System Performance¹

Specification	Value	Comments
Upstream Optical Link Loss, maximum	26 dB at 1610 nm	For Downstream performance, refer to Prisma D-PON 1550 Tx and EDFA Data Sheet, part number 7016765.
Upstream Pre-FEC 1e-6 BER Dynamic Range with Four 64 QAM at 5.12 Msps	> 25 dB typical < 38.8 MHz (NA and EU) > 20 dB typical 38.8 - 61.8 MHz (EU only)	With four 64 QAM at 5.12 Msps loading, using ITU C test channel
Upstream RF Link Gain	-10 dB	ONT RF input to Rx output
DOCSIS Compatibility	DOCSIS 3.0	Four-channel 64 QAM upstream bonding

Note:

- Upstream system performance with Prisma D-PON iW-2030 or EU iW-2030 ONT, 28 dB optical link for 1310 nm (26 dB optical link for 1610 nm), and D-PON Wideband Upstream Dual Optical Rx. Optical link consists of WDM, 20 km fiber, and 1x32 optical splitter. Specifications represent a two-wavelength system. Overlay of additional wavelengths may impact performance.

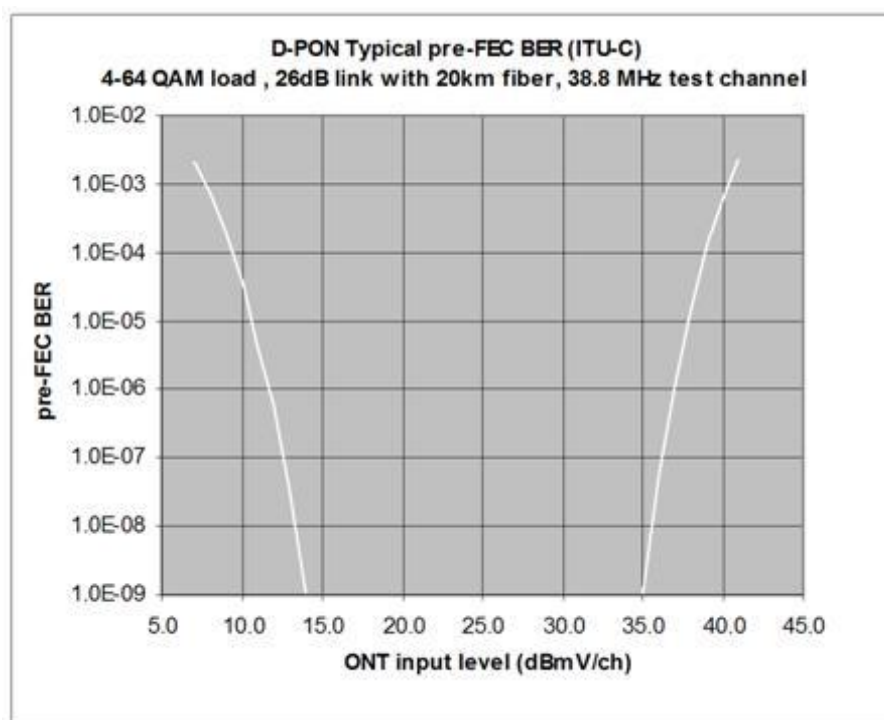

Prisma D-PON System Ordering Information¹

Table 4. Transmission Optics

Description	Part Number
(P2-15TXF-08EM-GHZ-SA-5060) 1550 Tx, NT78, 8 dBm, SA, 1550-60	737217
(P2-EDFA-FMOD-4X21.5-LA 2-WIDE) Opt Amp, 4 x 21.5 dBm, SA-LA	4028553
(P2-EDFA-FMOD-8X21.5-LA 2-WIDE) Opt Amp, 8 x 21.5 dBm, SA-LA	4029654
(P2-PS-M-A-S) Prisma II Power Supply	4012765
Kit, Prisma II Module Blank (6 pk)	716307
(P2-ICIM-MSO) ICIM, MSO version	4025187

Table 5. Headend Receivers

Description	Part Number
(P2-HD-RXR-DPON-WB-LP) D-PON Wideband HD Dual Rev Rx, 5-65MHz	4025368
(P2-HM) HD Host Module	4008281

Table 6. Passives

Description	Part Number
LGX-BWDM-DPON-1310/1490/1550/1610 LA-TRPL	4028628
LGX-BWDM-DPON-1310/1550/1610 LA-TRPL	4028627
LGX Chassis, 4 RU, 12 slot, 72 pos Bulkhead Conn, Unloaded	750182

Table 7. Subscriber ONTs

Description	Part Number
D-PON ONT iW-2030 -20 to +60C (NA wideband, 1610 nm)	4036319.1610
D-PON ONT iW-2030 -20 to +60C (EU wideband, 1610 nm)	4036796.1610

Table 8. ONT Accessories

Description	Part Number
100-120 VAC / 50-60 Hz, 12 VDC / 1 A Wall-Mount PS - NA, Japan	4035083
PS, 12 VDC / 1 A, 100-120 VAC / 50-60 Hz, Wall-Mount F-Conn for NA and Japan	4028842
PS, 12 VDC / 1 A, 230 VAC / 50 Hz, Wall-Mount, Linear Switching for Australia	4035080
220 VAC / 50-60 Hz, 12 VDC / 1 A Wall-Mount PS - Korea	4035079
230-240 VAC / 50-60 Hz, 12 VDC / 1 A Wall-Mount PS - UK	4035082
PS, 12 VDC / 1 A, 230 VAC / 50-60 Hz, Wall-Mount, Linear Switching for Europe	4035081
Indoor fiber splice enclosure and cover	4029691
CYL-BWDM-DPON-1310/1490/1550/1610-900-SA (WDM to accommodate a 1310/1490 overlay)	4035899

Note:

- To order fiber optic jumpers for headend components as needed, please see *Fiber Optical Jumper data sheet*, part number 7001079.

Service and Support

Using the Cisco Lifecycle Services approach, Cisco and its partners provide a broad portfolio of end-to-end services and support that can help increase your network's business value and return on investment. This approach defines the minimum set of activities needed by technology and by network complexity to help you successfully deploy and operate Cisco technologies and optimize their performance throughout the lifecycle of your network.

For More Information

To learn more about this product, contact your local account representative.

To subscribe to receive end-of-life/end-of-sale information, go to
<http://www.cisco.com/cgi-bin/Support/FieldNoticeTool/field-notice>.



Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks.

DOCSIS is a registered trademark of Cable Television Laboratories, Inc.

Other third party trademarks mentioned are the property of their respective owners.

The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1009R)

Specifications and product availability are subject to change without notice.

© 2010 Cisco and/or its affiliates. All rights reserved.

Cisco Systems, Inc.
800 722-2009 or 678 277-1120
www.cisco.com

Part Number 7017049 Rev D
December 2010