



Newer Design Guide Available

Cisco Smart Business Architecture has become part of the Cisco Validated Designs program.

For up-to-date guidance on the designs described in this guide, see <http://cvddocs.com/fw/Aug13-240>

For information about the Cisco Validated Design program, go to <http://www.cisco.com/go/cvd>





SBA

BORDERLESS
NETWORKS

CONFIGURATION
FILES

MPLS WAN Configuration Files Guide

● ● ● SMART BUSINESS ARCHITECTURE

February 2013 Series

Preface

Who Should Read This Guide

This Cisco® Smart Business Architecture (SBA) guide is for people who fill a variety of roles:

- Systems engineers who need standard procedures for implementing solutions
- Project managers who create statements of work for Cisco SBA implementations
- Sales partners who sell new technology or who create implementation documentation
- Trainers who need material for classroom instruction or on-the-job training

In general, you can also use Cisco SBA guides to improve consistency among engineers and deployments, as well as to improve scoping and costing of deployment jobs.

Release Series

Cisco strives to update and enhance SBA guides on a regular basis. As we develop a series of SBA guides, we test them together, as a complete system. To ensure the mutual compatibility of designs in Cisco SBA guides, you should use guides that belong to the same series.

The Release Notes for a series provides a summary of additions and changes made in the series.

All Cisco SBA guides include the series name on the cover and at the bottom left of each page. We name the series for the month and year that we release them, as follows:

month year Series

For example, the series of guides that we released in February 2013 is the “February Series”.

You can find the most recent series of SBA guides at the following sites:

Customer access: <http://www.cisco.com/go/sba>

Partner access: <http://www.cisco.com/go/sbachannel>

How to Read Commands

Many Cisco SBA guides provide specific details about how to configure Cisco network devices that run Cisco IOS, Cisco NX-OS, or other operating systems that you configure at a command-line interface (CLI). This section describes the conventions used to specify commands that you must enter.

Commands to enter at a CLI appear as follows:

```
configure terminal
```

Commands that specify a value for a variable appear as follows:

```
ntp server 10.10.48.17
```

Commands with variables that you must define appear as follows:

```
class-map [highest class name]
```

Commands shown in an interactive example, such as a script or when the command prompt is included, appear as follows:

```
Router# enable
```

Long commands that line wrap are underlined. Enter them as one command:

```
wrr-queue random-detect max-threshold 1 100 100 100 100 100  
100 100 100
```

Noteworthy parts of system output or device configuration files appear highlighted, as follows:

```
interface Vlan64  
  ip address 10.5.204.5 255.255.255.0
```

Comments and Questions

If you would like to comment on a guide or ask questions, please use the [SBA feedback form](#).

If you would like to be notified when new comments are posted, an RSS feed is available from the SBA customer and partner pages.

Table of Contents

What's In This SBA Guide	1
Cisco SBA Borderless Networks	1
Route to Success	1
About This Guide	1
Introduction	2
Using the Deployment Guides	2
Using the MPLS WAN Configuration Files Guide.....	2
Product List	4
WAN-Aggregation Devices – Dual MPLS and MPLS Dynamic Design Models	7
WAN-D3750X.....	7
CE-ASR1002-1.....	11
CE-ASR1001-2.....	14

WAN Remote-Site Devices – Dual MPLS and MPLS Dynamic Design Models	19
Remote Site 200: Single-Router, Single-Link with Distribution Layer (MPLS-A).....	21
RS200-3925-1	22
RS200-D4507.....	25
Remote Site 201: Single-Router, Single-Link with Access-Layer Stack (MPLS-A)	30
RS201-2911	30
Remote Site 202: Single-Router, Single-Link (MPLS-B).....	34
RS202-2911	34
Remote Site 203: Single-Router, Single-Link with Access Layer Stack (MPLS-A).....	37
RS203-2921-1.....	37
Remote Site 204: Single-Router, Single-Link (MPLS-A).....	40
RS204-1941	40
Remote Site 206: Dual-Router, Dual-Link with Access-Layer Stack (MPLS-A/MPLS-B).....	43
RS206-3925-1	43
RS206-3925-2	47
Remote Site 207: Single-Router, Dual-Link (MPLS-A/MPLS-B)	51
RS207-2921	51
Remote Site 208: Dual-router, Dual-Link with Distribution Layer (MPLS-A/MPLS-B).....	55
RS208-2951-1.....	56
RS208-2951-2.....	59
RS208-D3750X	63

Table of Contents

WAN-Aggregation Devices—MPLS Static Design Model	70	WAN Remote-Site Devices—MPLS Static Design Model	80
C6504-VSS	70	Remote Site 101: Single-Router, Single-Link with	
CE-ISR3945	76	Local DHCP (MPLS-B Static)	81
		RS101-2921	82
		Remote Site 103: 800 Series Single-Router, Single-Link	
		with Local DHCP (MPLS-B Static)	84
		RS103-881	84

What's In This SBA Guide

Cisco SBA Borderless Networks

Cisco SBA helps you design and quickly deploy a full-service business network. A Cisco SBA deployment is prescriptive, out-of-the-box, scalable, and flexible.

Cisco SBA incorporates LAN, WAN, wireless, security, data center, application optimization, and unified communication technologies—tested together as a complete system. This component-level approach simplifies system integration of multiple technologies, allowing you to select solutions that solve your organization's problems—without worrying about the technical complexity.

Cisco SBA Borderless Networks is a comprehensive network design targeted at organizations with up to 10,000 connected users. The SBA Borderless Network architecture incorporates wired and wireless local area network (LAN) access, wide-area network (WAN) connectivity, WAN application optimization, and Internet edge security infrastructure.

Route to Success

To ensure your success when implementing the designs in this guide, you should first read any guides that this guide depends upon—shown to the left of this guide on the route below. As you read this guide, specific prerequisites are cited where they are applicable.


About This Guide

This *configuration files guide* provides, as a comprehensive reference, the complete network device configurations that are implemented in a Cisco SBA deployment guide.

You can find the most recent series of Cisco SBA guides at the following sites:

Customer access: <http://www.cisco.com/go/sba>

Partner access: <http://www.cisco.com/go/sbachannel>

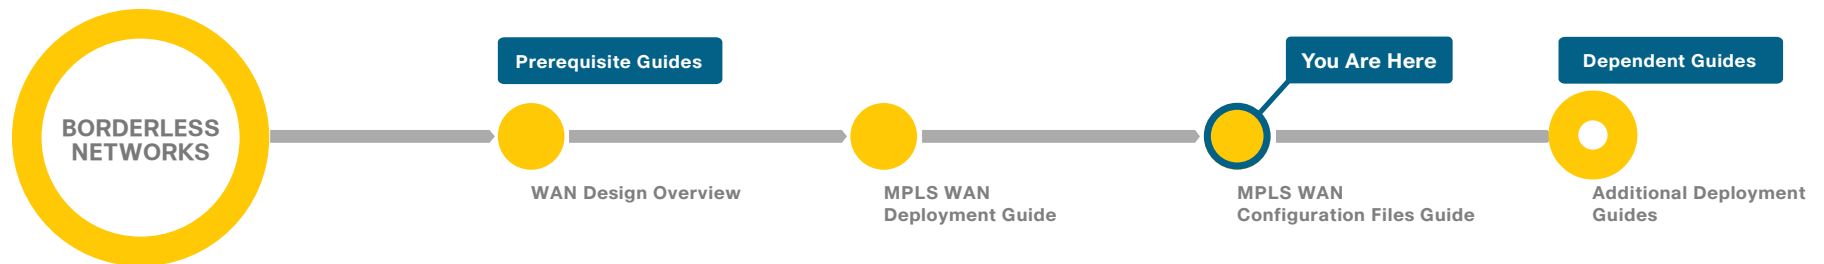

Introduction


For Cisco partners and customers with up to 10,000 connected users, Cisco has created an “out-of-the-box” deployment that is simple, fast, affordable, scalable, and flexible. It is designed to be easy to configure, deploy, and manage. The simplicity of this deployment, though, belies the depth and breadth of the architecture.

The Cisco Smart Business Architecture (SBA) WAN is documented in a single design guide, and there are deployment guides and configuration files guides for each of the three key WAN technologies: Multiprotocol Label Switching (MPLS) WAN, Layer 2 WAN, and VPN WAN.

Cisco SBA is a prescriptive reference design that provides step-by-step instructions for the deployment of the products in the design. It is based on best practice principles. Based on feedback from customers and partners, Cisco has developed a solid network foundation as a flexible platform that does not require reengineering to include additional network or user services.

Some of the base concepts referenced in this guide are covered in the Cisco SBA design and deployment guides; these documents should be reviewed first.

Figure 1 - Smart Business Architecture model

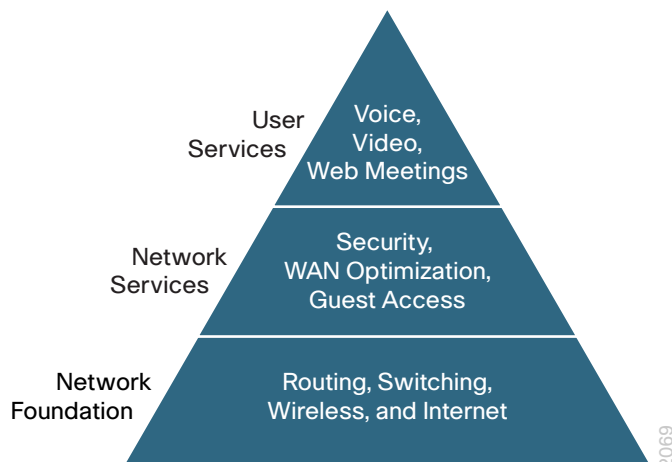

This deployment guide has been architected to make your life a little bit—maybe even a lot—smoother. This architecture:

- Provides a solid foundation.
- Makes deployment fast and easy.
- Accelerates the ability to easily deploy additional services.
- Avoids the need for re-engineering of the core network.

Using the Deployment Guides

To reflect our ease-of-use principle, Cisco SBA has been divided into three sections: LAN, WAN, and Internet edge. Each section has one or more deployment guides and configuration guides. Each guide is organized into modules. You can start at the beginning or jump to any module. Each part of the guide is designed to stand alone, so you can deploy the Cisco technology for that section without having to follow the previous module.

Each deployment guide starts with a business problem and architecture overview. These sections cover the basics of the deployment guide, the value for you and your customer, and the broad-stroke features and benefits of this compelling design. Each then has different modules depending on the network components being covered.

The *MPLS WAN Deployment Guide* has the following sections:


- Deploying an MPLS WAN
- Deploying a WAN Remote-Site Distribution Layer
- Deploying WAN Quality of Service

Using the MPLS WAN Configuration Files Guide

This document provides the available configuration files for the products used in the *MPLS WAN Deployment Guide*. It is a companion document to the deployment guide as a reference for engineers who are evaluating or deploying Cisco SBA.

Both the *MPLS WAN Deployment Guide* and the *MPLS WAN Configuration Files Guide* provide the complete list of products used in the lab testing of this design.

Figure 2 - Cisco SBA Overview

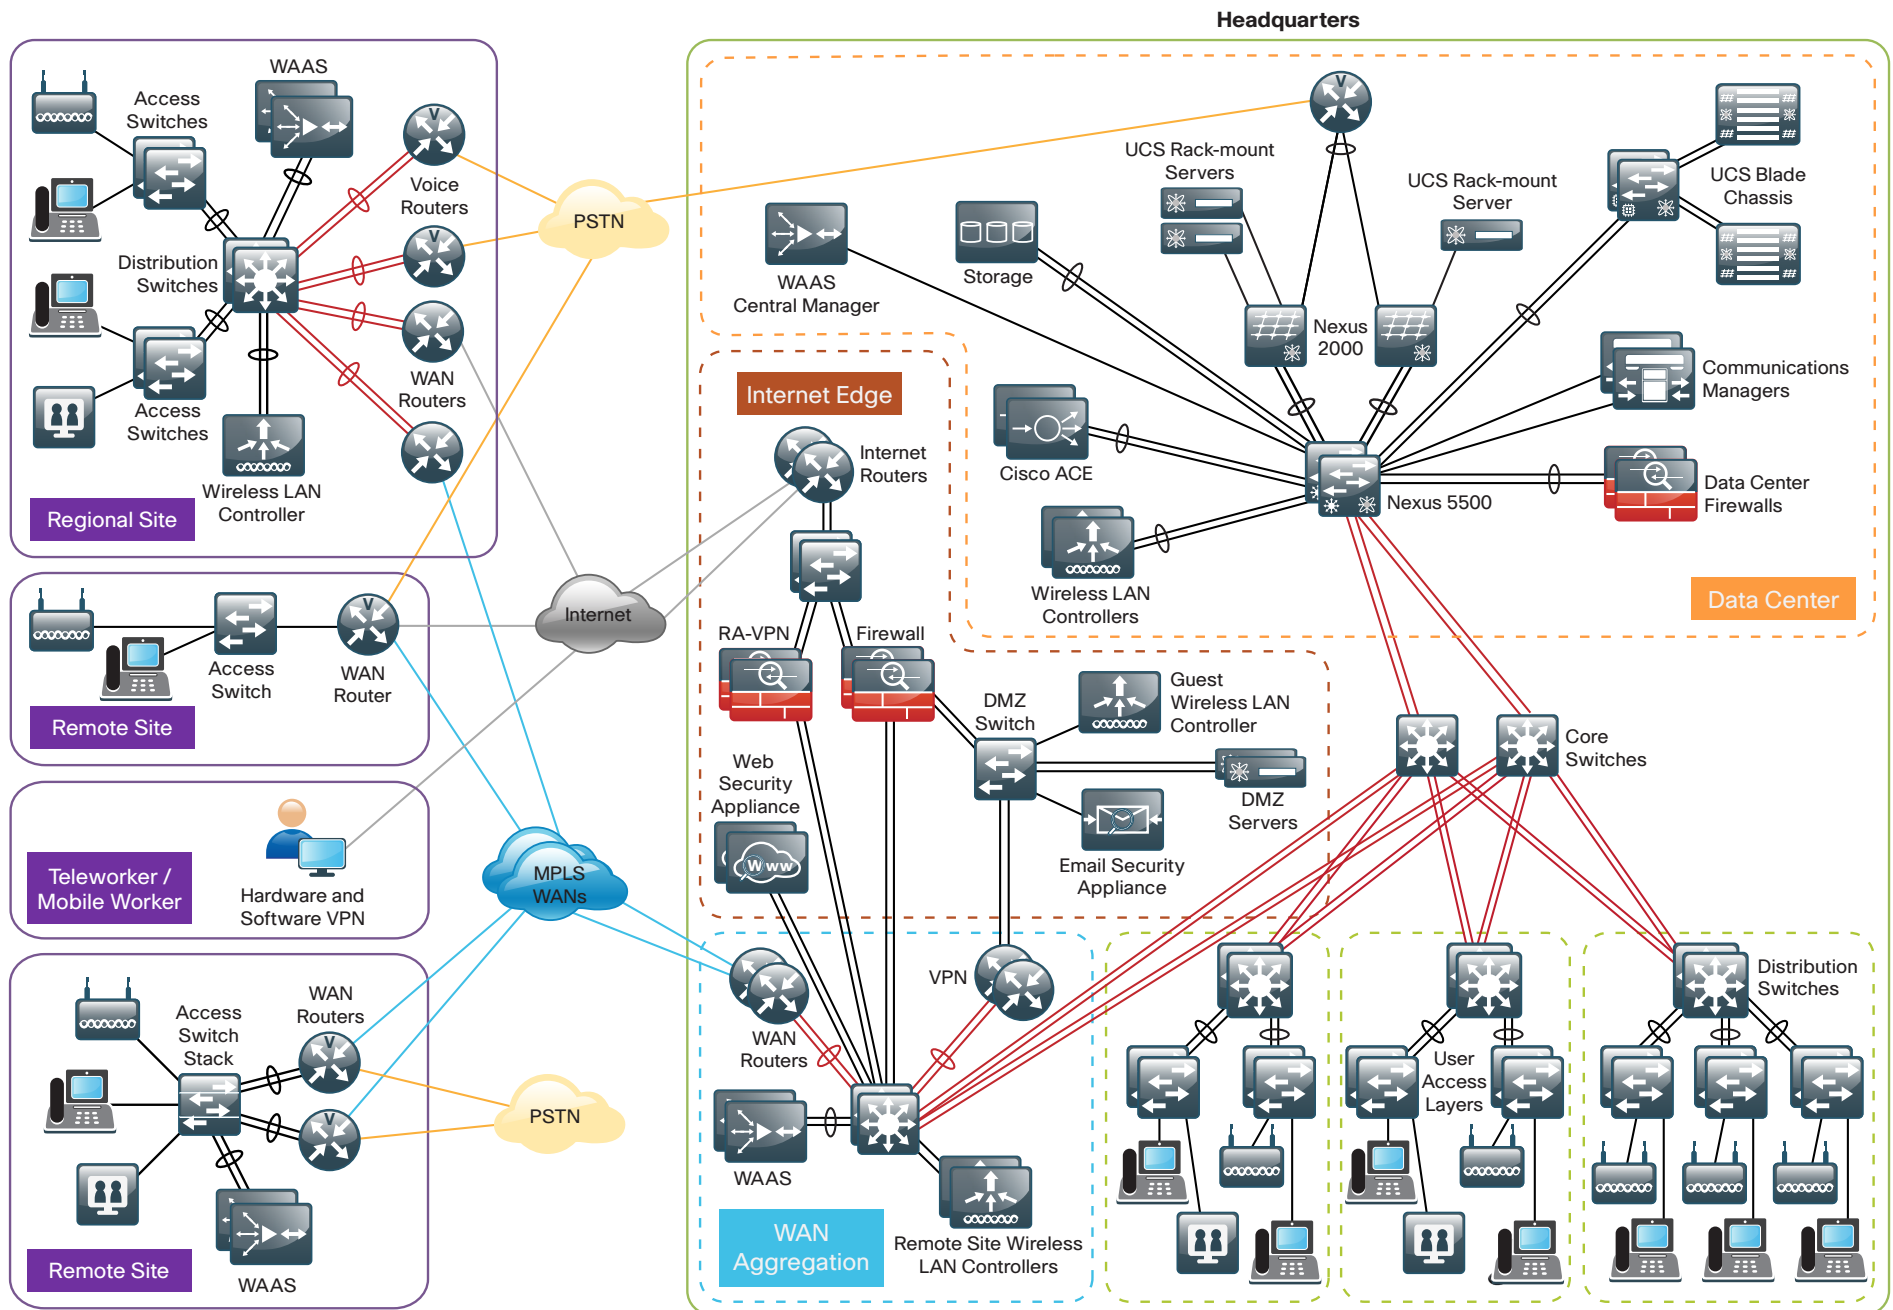

Product List

WAN Aggregation

Functional Area	Product Description	Part Numbers	Software
WAN-aggregation Router	Aggregation Services 1002 Router	ASR1002-5G-VPN/K9	IOS-XE 15.2(2)S2 Advanced Enterprise license
	Aggregation Services 1001 Router	ASR1001-2.5G-VPNK9	
WAN-aggregation Router	Cisco 3945 Security Bundle w/SEC license PAK	CISCO3945-SEC/K9	15.1(4)M5 securityk9 license
	Cisco 3925 Security Bundle w/SEC license PAK	CISCO3925-SEC/K9	
	Data Paper PAK for Cisco 3900 series	SL-39-DATA-K9	datak9 license

WAN Remote Site

Functional Area	Product Description	Part Numbers	Software
Modular WAN Remote-site Router	Cisco 3945 Voice Sec. Bundle, PVDM3-64, UC and SEC License PAK	C3945-VSEC/K9	15.1(4)M5 securityk9 license datak9 license
	Cisco 3925 Voice Sec. Bundle, PVDM3-64, UC and SEC License PAK	C3925-VSEC/K9	
	Data Paper PAK for Cisco 3900 series	SL-39-DATA-K9	
	Cisco 2951 Voice Sec. Bundle, PVDM3-32, UC and SEC License PAK	C2951-VSEC/K9	
	Cisco 2921 Voice Sec. Bundle, PVDM3-32, UC and SEC License PAK	C2921-VSEC/K9	
	Cisco 2911 Voice Sec. Bundle, PVDM3-32, UC and SEC License PAK	C2911-VSEC/K9	
	Data Paper PAK for Cisco 2900 series	SL-29-DATA-K9	
	1941 WAAS Express only Bundle	C1941-WAASX-SEC/K9	
	Data Paper PAK for Cisco 1900 series	SL-19-DATA-K9	
Fixed WAN Remote-site Router	Cisco 881 SRST Ethernet Security Router with FXS FXO 802.11n FCC Compliant	C881SRST-K9	15.1(4)M5 securityk9 license datak9 license

LAN Access Layer

Functional Area	Product Description	Part Numbers	Software
Modular Access Layer Switch	Cisco Catalyst 4507R+E 7-slot Chassis with 48Gbps per slot	WS-C4507R+E	3.3.0.SG(15.1-1SG) IP Base license
	Cisco Catalyst 4500 E-Series Supervisor Engine 7L-E	WS-X45-SUP7L-E	
	Cisco Catalyst 4500 E-Series 48 Ethernet 10/100/1000 (RJ45) PoE+ ports	WS-X4648-RJ45V+E	
	Cisco Catalyst 4500 E-Series 48 Ethernet 10/100/1000 (RJ45) PoE+,UPoE ports	WS-X4748-UPOE+E	
Stackable Access Layer Switch	Cisco Catalyst 3750-X Series Stackable 48 Ethernet 10/100/1000 PoE+ ports	WS-C3750X-48PF-S	15.0(2)SE IP Base license
	Cisco Catalyst 3750-X Series Stackable 24 Ethernet 10/100/1000 PoE+ ports	WS-C3750X-24P-S	
	Cisco Catalyst 3750-X Series Two 10GbE SFP+ and Two GbE SFP ports network module	C3KX-NM-10G	
	Cisco Catalyst 3750-X Series Four GbE SFP ports network module	C3KX-NM-1G	
Standalone Access Layer Switch	Cisco Catalyst 3560-X Series Standalone 48 Ethernet 10/100/1000 PoE+ ports	WS-C3560X-48PF-S	15.0(2)SE IP Base license
	Cisco Catalyst 3560-X Series Standalone 24 Ethernet 10/100/1000 PoE+ ports	WS-C3560X-24P-S	
	Cisco Catalyst 3750-X Series Two 10GbE SFP+ and Two GbE SFP ports network module	C3KX-NM-10G	
	Cisco Catalyst 3750-X Series Four GbE SFP ports network module	C3KX-NM-1G	
Stackable Access Layer Switch	Cisco Catalyst 2960-S Series 48 Ethernet 10/100/1000 PoE+ ports and Two 10GbE SFP+ Uplink ports	WS-C2960S-48FPD-L	15.0(2)SE LAN Base license
	Cisco Catalyst 2960-S Series 48 Ethernet 10/100/1000 PoE+ ports and Four GbE SFP Uplink ports	WS-C2960S-48FPS-L	
	Cisco Catalyst 2960-S Series 24 Ethernet 10/100/1000 PoE+ ports and Two 10GbE SFP+ Uplink ports	WS-C2960S-24PD-L	
	Cisco Catalyst 2960-S Series 24 Ethernet 10/100/1000 PoE+ ports and Four GbE SFP Uplink ports	WS-C2960S-24PS-L	
	Cisco Catalyst 2960-S Series Flexstack Stack Module	C2960S-STACK	


LAN Distribution Layer

Functional Area	Product Description	Part Numbers	Software
Modular Distribution Layer Virtual Switch Pair	Cisco Catalyst 6500 E-Series 6-Slot Chassis	WS-C6506-E	15.0(1)SY1 IP Services license
	Cisco Catalyst 6500 VSS Supervisor 2T with 2 ports 10GbE and PFC4	VS-S2T-10G	
	Cisco Catalyst 6500 16-port 10GbE Fiber Module w/DFC4	WS-X6816-10G-2T	
	Cisco Catalyst 6500 24-port GbE SFP Fiber Module w/DFC4	WS-X6824-SFP-2T	
	Cisco Catalyst 6500 4-port 40GbE/16-port 10GbE Fiber Module w/DFC4	WS-X6904-40G-2T	
	Cisco Catalyst 6500 4-port 10GbE SFP+ adapter for WX-X6904-40G module	CVR-CFP-4SFP10G	
Modular Distribution Layer Switch	Cisco Catalyst 4507R+E 7-slot Chassis with 48Gbps per slot	WS-C4507R+E	3.3.0.SG(15.1-1SG) Enterprise Services license
	Cisco Catalyst 4500 E-Series Supervisor Engine 7-E, 848Gbps	WS-X45-SUP7-E	
	Cisco Catalyst 4500 E-Series 24-port GbE SFP Fiber Module	WS-X4624-SFP-E	
	Cisco Catalyst 4500 E-Series 12-port 10GbE SFP+ Fiber Module	WS-X4712-SFP+E	
Stackable Distribution Layer Switch	Cisco Catalyst 3750-X Series Stackable 12 GbE SFP ports	WS-C3750X-12S-E	15.0(2)SE IP Services license
	Cisco Catalyst 3750-X Series Two 10GbE SFP+ and Two GbE SFP ports network module	C3KX-NM-10G	
	Cisco Catalyst 3750-X Series Four GbE SFP ports network module	C3KX-NM-1G	

WAN-Aggregation Devices – Dual MPLS and MPLS Dynamic Design Models

This section includes configuration files corresponding to the Dual MPLS design model as referenced in Figure 3. These configuration files also apply to the MPLS Dynamic design model.

Figure 3 - WAN-aggregation design—Dual MPLS and MPLS Dynamic design models

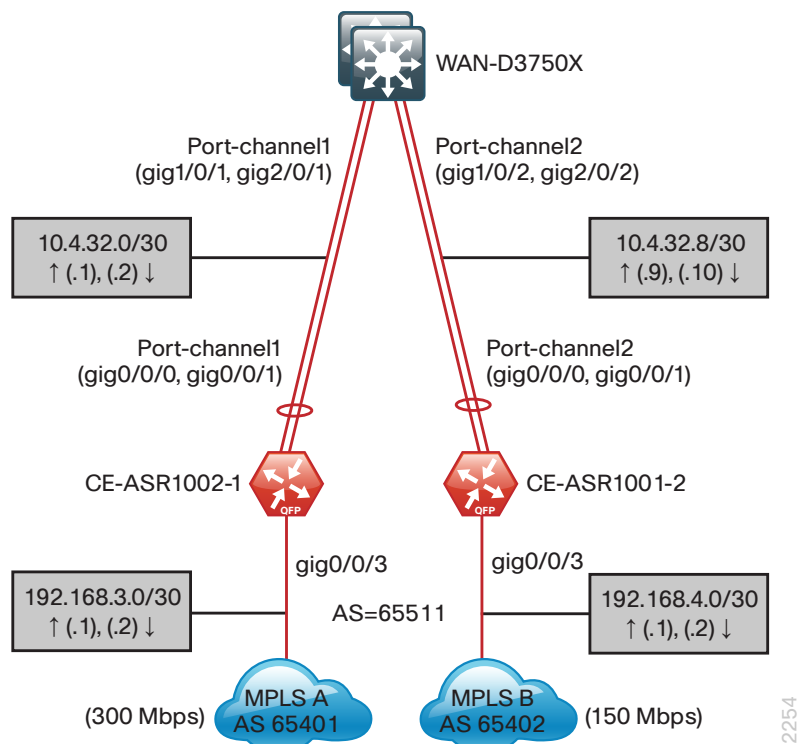

The following table provides the loopback addresses for the WAN aggregation devices in the Dual MPLS and MPLS Dynamic design models.

Table 1 - Loopback addresses

Hostname	Loopback0
WAN-D3750X	10.4.32.240/32
CE-ASR1002-1	10.4.32.241/32
CE-ASR1001-2	10.4.32.242/32

The following table provides a summary of the various distribution layer switch device interconnections to other WAN-aggregation components.

Table 2 - Dual MPLS design model—distribution layer switch port channel information

Port channel	Member interfaces	Layer3/Layer2	Connected device
1	gig1/0/1 gig2/0/1	Layer 3	CE-ASR1002-1
2	gig1/0/2 gig2/0/2	Layer 3	CE-ASR1001-2

WAN-D3750X

```

version 15.0
no service pad
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname WAN-D3750X
!
```

```

boot-start-marker
boot-end-marker
!
!
logging buffered 1000000
enable secret 5 $1$ssq/$J5zW2nl0tp6NsQDx48yK1
!
username admin password 7 121A540411045D5679
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
    server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
!
aaa session-id common
clock timezone PST -8 0
clock summer-time PDT recurring
switch 1 provision ws-c3750x-24
switch 2 provision ws-c3750x-24
stack-mac persistent timer 0
system mtu routing 1500
!
ip routing
!
!
!
ip domain-name cisco.local
ip name-server 10.4.48.10
ip multicast-routing distributed

```

```

vtp mode transparent
udld enable

!
mls qos map policed-dscp 0 10 18 24 46 to 8
mls qos map cos-dscp 0 8 16 24 32 46 48 56
mls qos srr-queue input bandwidth 70 30
mls qos srr-queue input threshold 1 80 90
mls qos srr-queue input priority-queue 2 bandwidth 30
mls qos srr-queue input cos-map queue 1 threshold 2 3
mls qos srr-queue input cos-map queue 1 threshold 3 6 7
mls qos srr-queue input cos-map queue 2 threshold 1 4
mls qos srr-queue input dscp-map queue 1 threshold 2 24
mls qos srr-queue input dscp-map queue 1 threshold 3 48 49 50 51
52 53 54 55
mls qos srr-queue input dscp-map queue 1 threshold 3 56 57 58 59
60 61 62 63
mls qos srr-queue input dscp-map queue 2 threshold 3 32 33 40 41
42 43 44 45
mls qos srr-queue input dscp-map queue 2 threshold 3 46 47
mls qos srr-queue output cos-map queue 1 threshold 3 4 5
mls qos srr-queue output cos-map queue 2 threshold 1 2
mls qos srr-queue output cos-map queue 2 threshold 2 3
mls qos srr-queue output cos-map queue 2 threshold 3 6 7
mls qos srr-queue output cos-map queue 3 threshold 3 0
mls qos srr-queue output cos-map queue 4 threshold 3 1
mls qos srr-queue output dscp-map queue 1 threshold 3 32 33 40 41
42 43 44 45
mls qos srr-queue output dscp-map queue 1 threshold 3 46 47
mls qos srr-queue output dscp-map queue 2 threshold 1 16 17 18 19
20 21 22 23
mls qos srr-queue output dscp-map queue 2 threshold 1 26 27 28 29
30 31 34 35
mls qos srr-queue output dscp-map queue 2 threshold 1 36 37 38 39
mls qos srr-queue output dscp-map queue 2 threshold 2 24
mls qos srr-queue output dscp-map queue 2 threshold 3 48 49 50 51
52 53 54 55

```

```

mls qos srr-queue output dscp-map queue 2 threshold 3 56 57 58 59
60 61 62 63
mls qos srr-queue output dscp-map queue 3 threshold 3 0 1 2 3 4 5
6 7
mls qos srr-queue output dscp-map queue 4 threshold 1 8 9 11 13
15
mls qos srr-queue output dscp-map queue 4 threshold 2 10 12 14
mls qos queue-set output 1 threshold 1 100 100 50 200
mls qos queue-set output 1 threshold 2 125 125 100 400
mls qos queue-set output 1 threshold 3 100 100 100 3200
mls qos queue-set output 1 threshold 4 60 150 50 200
mls qos queue-set output 1 buffers 15 25 40 20
mls qos
!

license boot level ipservices
license boot level ipservices switch 2
!
!
!
!
spanning-tree mode rapid-pvst
spanning-tree portfast bpduguard default
spanning-tree extend system-id
spanning-tree vlan 1-4094 priority 24576
!
!
!
port-channel load-balance src-dst-ip
!
vlan internal allocation policy ascending
!
ip ssh source-interface Loopback0
ip ssh version 2
!
!
macro name EgressQoS

```

```

mls qos trust dscp
queue-set 2
srr-queue bandwidth share 1 30 35 5
priority-queue out
@
!
!
interface Loopback0
ip address 10.4.32.240 255.255.255.255
ip pim sparse-mode
!
interface Port-channel1
description connection to CE-ASR1002-1
no switchport
ip address 10.4.32.1 255.255.255.252
ip pim sparse-mode
logging event link-status
carrier-delay msec 0
!
interface Port-channel2
description connection to CE-ASR1001-2
no switchport
ip address 10.4.32.9 255.255.255.252
ip pim sparse-mode
logging event link-status
carrier-delay msec 0
!
interface FastEthernet0
no ip address
no ip route-cache
shutdown
!
interface GigabitEthernet1/0/1
description CE-ASR1002-1
no switchport
no ip address
logging event link-status

```

```

logging event trunk-status
logging event bundle-status
carrier-delay msec 0
srr-queue bandwidth share 1 30 35 5
queue-set 2
priority-queue out
mls qos trust dscp
macro description EgressQoS
channel-protocol lacp
channel-group 1 mode active
!
interface GigabitEthernet1/0/2
description CE-ASR1001-2
no switchport
no ip address
logging event link-status
logging event trunk-status
logging event bundle-status
carrier-delay msec 0
srr-queue bandwidth share 1 30 35 5
queue-set 2
priority-queue out
mls qos trust dscp
macro description EgressQoS
channel-protocol lacp
channel-group 2 mode active
!
interface TenGigabitEthernet1/1/1
description Connection to C6509-2 Te4/6
no switchport
ip address 10.4.40.46 255.255.255.252
ip pim sparse-mode
ip summary-address eigrp 100 10.4.32.0 255.255.248.0
ip summary-address eigrp 100 10.5.0.0 255.255.0.0
logging event link-status
carrier-delay msec 0
srr-queue bandwidth share 1 30 35 5

queue-set 2
priority-queue out
mls qos trust dscp
macro description EgressQoS
!
interface GigabitEthernet2/0/1
description CE-ASR1002-1
no switchport
no ip address
logging event link-status
logging event trunk-status
logging event bundle-status
carrier-delay msec 0
srr-queue bandwidth share 1 30 35 5
queue-set 2
priority-queue out
mls qos trust dscp
macro description EgressQoS
channel-protocol lacp
channel-group 1 mode active
!
interface GigabitEthernet2/0/2
description CE-ASR1001-2
no switchport
no ip address
logging event link-status
logging event trunk-status
logging event bundle-status
carrier-delay msec 0
srr-queue bandwidth share 1 30 35 5
queue-set 2
priority-queue out
mls qos trust dscp
macro description EgressQoS
channel-protocol lacp
channel-group 2 mode active
!

```

```

interface TenGigabitEthernet2/1/1
  description Connection to C6509-1 Te4/6
  no switchport
  ip address 10.4.40.42 255.255.255.252
  ip pim sparse-mode
  ip summary-address eigrp 100 10.4.32.0 255.255.248.0
  ip summary-address eigrp 100 10.5.0.0 255.255.0.0
  logging event link-status
  carrier-delay msec 0
  srr-queue bandwidth share 1 30 35 5
  queue-set 2
  priority-queue out
  mls qos trust dscp
  macro description EgressQoS
!
interface Vlan1
  no ip address
  shutdown
!
router eigrp 100
  network 10.4.0.0 0.1.255.255
  passive-interface default
  no passive-interface TenGigabitEthernet2/1/1
  no passive-interface TenGigabitEthernet1/1/1
  no passive-interface Port-channel1
  no passive-interface Port-channel2
  nsf
!
!
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!
ip pim autorp listener
ip pim register-source Loopback0
ip tacacs source-interface Loopback0

```

```

!
logging esm config
logging trap errors
logging 10.4.48.35
logging 10.4.48.36
access-list 55 permit 10.4.48.0 0.0.0.255
!
snmp-server community cisco RO 55
snmp-server community cisco123 RW 55
snmp-server trap-source Loopback0
tacacs server TACACS-SERVER-1
  address ipv4 10.4.48.15
  key 7 03375E08140A35674B10
!
!
!
line con 0
line vty 0 4
  exec-timeout 0 0
  transport preferred none
  transport input ssh
line vty 5 15
  exec-timeout 0 0
  transport preferred none
  transport input ssh
!
!
ntp source Loopback0
ntp server 10.4.48.17
end

```

CE-ASR1002-1

```

version 15.2
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
no platform punt-keepalive disable-kernel-core

```

```

!
hostname CE-ASR1002-1
!
!
!
!
vrf definition Mgmt-intf
!
  address-family ipv4
  exit-address-family
!
  address-family ipv6
  exit-address-family
!
enable secret 4 /DtCCr53Q4B18jSIm1UEqu7cNVZT0hxTZyUnZdsSrsW
!
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
  server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
!
aaa session-id common
clock timezone PST -8 0
clock summer-time PDT recurring
!
!
!
!
ip domain name cisco.local

```

```

ip multicast-routing distributed
!
!
!
!
multilink bundle-name authenticated
!
!
!
!
!
!
!
username admin password 7 0205554808095E731F
!
redundancy
  mode none
!
!
!
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
class-map match-any DATA
  match dscp af21
class-map match-any BGP-ROUTING
  match protocol bgp
class-map match-any INTERACTIVE-VIDEO
  match dscp cs4 af41
class-map match-any CRITICAL-DATA
  match dscp cs3 af31
class-map match-any VOICE
  match dscp ef

```

```

class-map match-any SCAVENGER
  match dscp cs1  af11
class-map match-any NETWORK-CRITICAL
  match dscp cs2   cs6
!
policy-map MARK-BGP
  class BGP-ROUTING
    set dscp cs6
policy-map WAN
  class VOICE
    priority percent 10
  class INTERACTIVE-VIDEO
    priority percent 23
  class CRITICAL-DATA
    bandwidth percent 15
    random-detect dscp-based
  class DATA
    bandwidth percent 19
    random-detect dscp-based
  class SCAVENGER
    bandwidth percent 5
  class NETWORK-CRITICAL
    bandwidth percent 3
    service-policy MARK-BGP
  class class-default
    bandwidth percent 25
    random-detect
policy-map WAN-INTERFACE-G0/0/3
  class class-default
    shape average 300000000
    service-policy WAN
!
!
!
!
interface Loopback0
  ip address 10.4.32.241 255.255.255.255

```

```

  ip pim sparse-mode
!
interface Port-channel1
  ip address 10.4.32.2 255.255.255.252
  ip pim sparse-mode
  no negotiation auto
!
interface GigabitEthernet0/0/0
  description WAN-D3750X Gig1/0/1
  no ip address
  negotiation auto
  cdp enable
  channel-group 1 mode active
!
interface GigabitEthernet0/0/1
  description WAN-D3750X Gig2/0/1
  no ip address
  negotiation auto
  channel-group 1 mode active
!
interface GigabitEthernet0/0/2
  no ip address
  shutdown
  negotiation auto
!
interface GigabitEthernet0/0/3
  description MPLS PE router
  bandwidth 300000
  ip address 192.168.3.1 255.255.255.252
  negotiation auto
  service-policy output WAN-INTERFACE-G0/0/3
!
interface GigabitEthernet0
  vrf forwarding Mgmt-intf
  no ip address
  shutdown
  negotiation auto

```

```

!
!
router eigrp 100
  distribute-list route-map BLOCK-TAGGED-ROUTES in
  default-metric 300000 100 255 1 1500
  network 10.4.0.0 0.1.255.255
  redistribute bgp 65511
  passive-interface default
  no passive-interface Port-channell
  eigrp router-id 10.4.32.241
!
router bgp 65511
  bgp router-id 10.4.32.241
  bgp log-neighbor-changes
  network 0.0.0.0
  network 192.168.3.0 mask 255.255.255.252
  redistribute eigrp 100
  neighbor 10.4.32.242 remote-as 65511
  neighbor 10.4.32.242 update-source Loopback0
  neighbor 10.4.32.242 next-hop-self
  neighbor 192.168.3.2 remote-as 65401
!
ip forward-protocol nd
!
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
ip pim autorp listener
ip pim register-source Loopback0
ip tacacs source-interface Loopback0
!
logging 10.4.48.35
access-list 55 permit 10.4.48.0 0.0.0.255
!
route-map BLOCK-TAGGED-ROUTES deny 10
  match tag 65401 65402 65512

```

```

!
route-map BLOCK-TAGGED-ROUTES permit 20
!
snmp-server community cisco RO 55
snmp-server community cisco123 RW 55
snmp-server trap-source Loopback0
!
tacacs server TACACS-SERVER-1
  address ipv4 10.4.48.15
  key 7 01200307490E12242455
!
!
control-plane
!
!
line con 0
  logging synchronous
  stopbits 1
line aux 0
  stopbits 1
line vty 0 4
  transport preferred none
  transport input ssh
line vty 5 15
  transport preferred none
  transport input ssh
!
ntp source Loopback0
ntp server 10.4.48.17
!
end

```

CE-ASR1001-2

```

version 15.2
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption

```

```

no platform punt-keepalive disable-kernel-core
!
hostname CE-ASR1001-2
!
!
!
!
vrf definition Mgmt-intf
!
  address-family ipv4
  exit-address-family
!
  address-family ipv6
  exit-address-family
!
enable secret 4 /DtCCr53Q4B18jSIm1UEqu7cNVZTOhxTZyUnZdsSrsW
!
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
  server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
!
aaa session-id common
clock timezone PST -8 0
clock summer-time PDT recurring
!
!
!
!

```

```

ip domain name cisco.local
ip multicast-routing distributed
!
!
!
!
!
multilink bundle-name authenticated
!
!
!
!
!
!
!
!
!
!
username admin password 7 094F1F1A1A0A464058
!
redundancy
  mode none
!
!
!
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
class-map match-any DATA
  match dscp af21
class-map match-any BGP-ROUTING
  match protocol bgp
class-map match-any INTERACTIVE-VIDEO
  match dscp cs4  af41

```

```

class-map match-any CRITICAL-DATA
  match dscp cs3  af31
class-map match-any VOICE
  match dscp ef
class-map match-any SCAVENGER
  match dscp cs1  af11
class-map match-any NETWORK-CRITICAL
  match dscp cs2  cs6
!
policy-map MARK-BGP
  class BGP-ROUTING
    set dscp cs6
policy-map WAN
  class VOICE
    priority percent 10
  class INTERACTIVE-VIDEO
    priority percent 23
  class CRITICAL-DATA
    bandwidth percent 15
    random-detect dscp-based
  class DATA
    bandwidth percent 19
    random-detect dscp-based
  class SCAVENGER
    bandwidth percent 5
  class NETWORK-CRITICAL
    bandwidth percent 3
    service-policy MARK-BGP
  class class-default
    bandwidth percent 25
    random-detect
policy-map WAN-INTERFACE-G0/0/3
  class class-default
    shape average 150000000
    service-policy WAN
!
!

```

```

!
!
interface Loopback0
  ip address 10.4.32.242 255.255.255.255
  ip pim sparse-mode
!
interface Port-channel1
  ip address 10.4.32.10 255.255.255.252
  ip pim sparse-mode
  no negotiation auto
!
interface GigabitEthernet0/0/0
  description WAN-D3750X Gig1/0/2
  no ip address
  negotiation auto
  channel-group 1 mode active
!
interface GigabitEthernet0/0/1
  description WAN-D3750X Gig2/0/2
  no ip address
  negotiation auto
  channel-group 1 mode active
!
interface GigabitEthernet0/0/2
  no ip address
  shutdown
  negotiation auto
!
interface GigabitEthernet0/0/3
  description MPLS PE router
  bandwidth 150000
  ip address 192.168.4.1 255.255.255.252
  service-policy output WAN-INTERFACE-G0/0/3
!
interface GigabitEthernet0/2/0
  no ip address
  shutdown

```

```

negotiation auto
!
interface GigabitEthernet0/2/1
no ip address
shutdown
negotiation auto
!
interface GigabitEthernet0/2/2
no ip address
shutdown
negotiation auto
!
interface GigabitEthernet0/2/3
no ip address
shutdown
negotiation auto
!
interface GigabitEthernet0
vrf forwarding Mgmt-intf
no ip address
shutdown
negotiation auto
!
!
router eigrp 100
  distribute-list route-map BLOCK-TAGGED-ROUTES in
  default-metric 150000 100 255 1 1500
  network 10.4.0.0 0.1.255.255
  redistribute bgp 65511
  redistribute static
  passive-interface default
  no passive-interface Port-channell
  eigrp router-id 10.4.32.242
!
router bgp 65511
  bgp router-id 10.4.32.242
  bgp log-neighbor-changes

```

```

network 0.0.0.0
network 192.168.3.0 mask 255.255.255.252
redistribute eigrp 100
neighbor 10.4.32.241 remote-as 65511
neighbor 10.4.32.241 update-source Loopback0
neighbor 10.4.32.241 next-hop-self
neighbor 192.168.4.2 remote-as 65402
!
ip forward-protocol nd
!
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
ip pim autorp listener
ip pim register-source Loopback0
ip tacacs source-interface Loopback0
!
!
logging 10.4.48.35
access-list 55 permit 10.4.48.0 0.0.0.255
!
route-map BLOCK-TAGGED-ROUTES deny 10
  match tag 65401 65402 65512
!
route-map BLOCK-TAGGED-ROUTES permit 20
!
snmp-server community cisco RO 55
snmp-server community cisco123 RW 55
snmp-server trap-source Loopback0
!
tacacs server TACACS-SERVER-1
  address ipv4 10.4.48.15
  key 7 0235015819031B0A4957
!
!
control-plane

```


```
!  
!  
!  
line con 0  
  logging synchronous  
  stopbits 1  
line aux 0  
  stopbits 1  
line vty 0 4  
  access-class 55 in  
  transport preferred none  
  transport input ssh  
line vty 5 15  
  access-class 55 in  
  transport preferred none  
  transport input ssh  
!  
ntp source Loopback0  
ntp server 10.4.48.17  
!  
end
```

Notes

WAN Remote-Site Devices – Dual MPLS and MPLS Dynamic Design Models

This section includes configuration files corresponding to the Dual MPLS design model as referenced in Figure 4. Each remote-site type has its respective devices grouped together along with any other relevant configuration information. The Autonomous System Number (ASN) used in Cisco SBA configurations is 65511.

Figure 4 - WAN remote-site designs—Dual MPLS and MPLS Dynamic

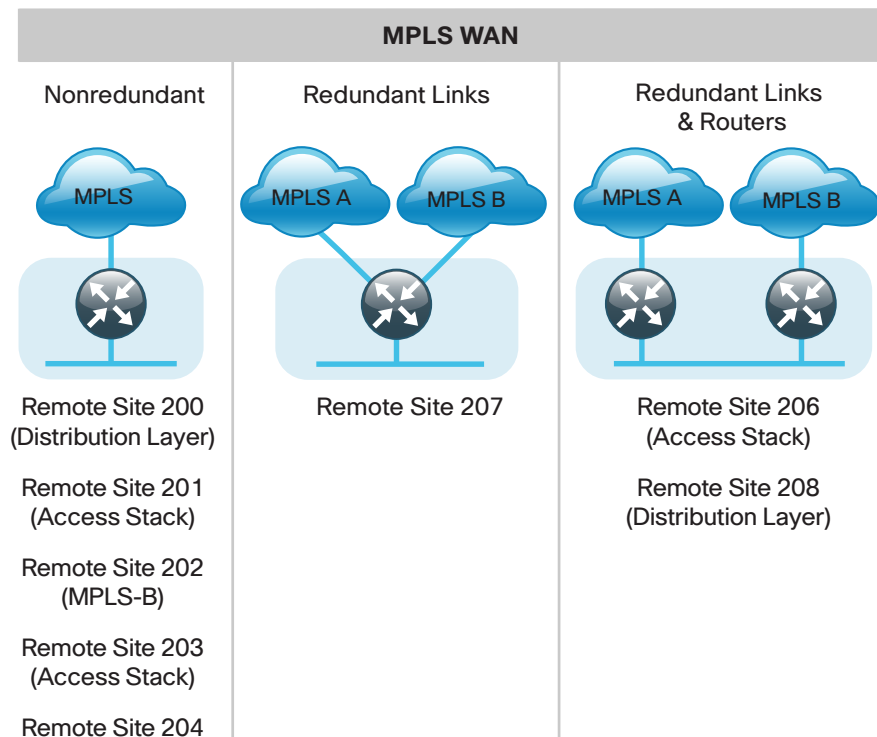

Notes

Table 3 - Remote-site MPLS WAN connection details

Location	Net block	MPLS CE	MPLS PE	Carrier AS	LAN interfaces	Loopbacks
Remote Site 200 (Single-router, single-link with distribution layer)	10.5.0.0/21	(gig0/0) 192.168.3.17	192.168.3.18	65401 (A)	(gig0/1, gig0/2)	10.255.251.200 (router)
Remote Site 201 (Single-router, single-link with access-layer stack)	10.5.40.0/21	(gig0/0) 192.168.3.21	192.168.3.22	65401 (A)	(gig0/1, gig0/2)	10.255.251.201 (router)
Remote Site 202 (Single-router, single-link)	10.5.64.0/21	(gig0/0) 192.168.4.5	192.168.4.6	65402 (B)	(gig0/2)	10.255.252.202 (router)
Remote Site 203 (Single-router, single-link with access-layer stack)	10.5.48.0/21	(gig0/0) 192.168.3.25	192.168.3.26	65401 (A)	(gig0/1, gig0/2)	10.255.251.203 (router)
Remote Site 204 (Single-router, single-link)	10.5.56.0/21	(gig0/0) 192.168.3.29	192.168.3.30	65401 (A)	(gig0/1)	10.255.251.204 (router)
Remote Site 206 (Dual-router, dual-link with access-layer stack)	10.5.8.0/21	(gig0/0) 192.168.3.9 (gig0/0) 192.168.4.9	192.168.3.10 192.168.4.10	65401 (A) 65402 (B)	(gig0/1, gig0/2) (gig0/1, gig0/2)	10.255.251.206 (router 1) 10.255.252.206 (router 2)
Remote Site 207 (Single-router, dual-link)	10.5.16.0/21	(gig0/0) 192.168.3.13 (gig0/1) 192.168.4.13	192.168.3.14 192.168.4.14	65401 (A) 65402 (B)	(gig0/2)	10.255.251.207 (router)
Remote Site 208 (Dual-router, dual-link with distribution layer)	10.5.80.0/21	(gig0/0) 192.168.3.45 (gig0/0) 192.168.4.45	192.168.3.46 192.168.4.45	65401 (A) 65402 (B)	(gig0/1, gig0/2) (gig0/1, gig0/2)	10.255.251.208 (router 1) 10.255.252.208 (router 2)

The following table lists the policed-rate link speeds for the remote-site quality-of-service (QoS) traffic shaping policies.

Table 4 - Remote-site policed-rate link speeds

Location	Net block	MPLS link speed
Remote Site 200	10.5.0.0/21	50 Mbps
Remote Site 201	10.5.40.0/21	10 Mbps
Remote Site 202	10.5.64.0/21	10 Mbps
Remote Site 203	10.5.48.0/21	20 Mbps
Remote Site 204	10.5.56.0/21	2 Mbps
Remote Site 206 (dual-link)	10.5.8.0/21	50/25 Mbps
Remote Site 207 (dual-link)	10.5.16.0/21	20/10 Mbps
Remote Site 208 (dual-link)	10.5.80.0/21	25/25 Mbps

Remote Site 200: Single-Router, Single-Link with Distribution Layer (MPLS-A)

Table 5 - Remote Site 200—IP address information

Location	Net block	Data wired subnet	Voice wired subnet	Loopbacks and switches
Remote Site 200	10.5.0.0/21	10.5.1.0/24 (VLAN 100) 10.5.3.0/24 (VLAN 102)	10.5.2.0/24 (VLAN 101) 10.5.4.0/24 (VLAN 103)	10.255.251.200 (router) 10.5.7.254 (distribution switch) 10.5.7.2 (access switch 1) 10.5.7.3 (access switch 2)

The following two tables provide additional information to connect to the distribution layer.

Table 6 - Remote Site 200—router connection to distribution layer

Remote-site information		Connection to distribution layer switch			Port-Channel subinterface and IP assignments		
Location	Net block	Router	Port channel	Member interfaces	Subinterface	VLAN	Network
Remote Site 200	10.5.0.0/21	RS200-3925-1	1	gig0/1 gig0/2	Port-channel1.50	50	10.5.0.0/30

Table 7 - Remote Site 200—distribution layer switch connections

Port channel	Member interfaces	Layer3/Layer2	Connected device
1	gig1/0/23 gi2/0/23	Layer 2 (VLAN 50)	RS200-3925-1
10	gig1/0/1 gig2/0/1	Layer 2 (VLAN 100,101,106)	RS200-A3750X
11	gig1/0/2 gig2/0/2	Layer 2 (VLAN 102,103,106)	RS200-A3750X-PR1

RS200-3925-1

```
version 15.1
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname RS200-3925-1
!
boot-start-marker
boot-end-marker
!
!
enable secret 4 /DtCCr53Q4B18jSImlUEqu7cNVZTOhxTZyUnZdsSrsW
!
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
    server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
!
aaa session-id common
!
clock timezone PST -8 0
clock summer-time PDT recurring
!
no ipv6 cef
ipv6 spd queue min-threshold 62
ipv6 spd queue max-threshold 63
!
```

```
!
ip source-route
ip cef
!
!
!
ip multicast-routing
!
!
ip domain name cisco.local
!
multilink bundle-name authenticated
!
!
!
!
!
voice-card 0
!
!
!
!
!
!
!
license udi pid C3900-SPE100/K9 sn FOC14415C5Q
hw-module sm 2
!
!
!
username admin password 7 070C705F4D06485744
!
redundancy
!
!
!
!
```

```

ip ssh source-interface Loopback0
ip ssh version 2
!
class-map match-any DATA
  match dscp af21
class-map match-any BGP-ROUTING
  match protocol bgp
class-map match-any INTERACTIVE-VIDEO
  match dscp cs4 af41
class-map match-any CRITICAL-DATA
  match dscp cs3 af31
class-map match-any VOICE
  match dscp ef
class-map match-any SCAVENGER
  match dscp cs1 af11
class-map match-any NETWORK-CRITICAL
  match dscp cs2 cs6
!
!
policy-map MARK-BGP
  class BGP-ROUTING
    set dscp cs6
policy-map WAN
  class VOICE
    priority percent 10
  class INTERACTIVE-VIDEO
    priority percent 23
  class CRITICAL-DATA
    bandwidth percent 15
    random-detect dscp-based
  class DATA
    bandwidth percent 19
    random-detect dscp-based
  class SCAVENGER
    bandwidth percent 5
  class NETWORK-CRITICAL
    bandwidth percent 3

```

```

  service-policy MARK-BGP
class class-default
  bandwidth percent 25
  random-detect
policy-map WAN-INTERFACE-G0/0
  class class-default
    shape average 25000000
    service-policy WAN
!
!
!
!
interface Loopback0
  ip address 10.255.251.200 255.255.255.255
  ip pim sparse-mode
!
interface Port-channel1
  description EtherChannel link to RS200-D3750X
  no ip address
  hold-queue 150 in
!
interface Port-channel1.50
  description R1 routed link to distribution layer
  encapsulation dot1Q 50
  ip address 10.5.0.1 255.255.255.252
  ip pim sparse-mode
!
interface Embedded-Service-Engine0/0
  no ip address
  shutdown
!
interface GigabitEthernet0/0
  bandwidth 50000
  ip address 192.168.3.17 255.255.255.252
  duplex auto
  speed auto
  no cdp enable

```

```

service-policy output WAN-INTERFACE-G0/0
!
interface GigabitEthernet0/1
description RS200-D3750X Gig2/0/23
no ip address
duplex auto
speed auto
channel-group 1
!
interface GigabitEthernet0/2
description RS200-D3750X Gig1/0/23
no ip address
duplex auto
speed auto
channel-group 1
!
interface Vlan1
no ip address
!
!
router eigrp 100
default-metric 25000 100 255 1 1500
network 10.5.0.0 0.0.255.255
network 10.255.0.0 0.0.255.255
redistribute bgp 65511
passive-interface default
no passive-interface Port-channel1.50
eigrp router-id 10.255.251.200
!
router bgp 65511
bgp router-id 10.255.251.200
bgp log-neighbor-changes
network 10.5.1.0 mask 255.255.255.0
network 10.5.3.0 mask 255.255.255.0
network 10.255.251.200 mask 255.255.255.255
network 192.168.3.16 mask 255.255.255.252
aggregate-address 10.5.0.0 255.255.248.0 summary-only

```

```

neighbor 192.168.3.18 remote-as 65401
!
ip forward-protocol nd
!
ip pim autorp listener
ip pim register-source Loopback0
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!
ip tacacs source-interface Loopback0
!
logging 10.4.48.35
!
!
!
!
nls resp-timeout 1
cpd cr-id 1
!
snmp-server community cisco RO
snmp-server community cisco123 RW
snmp-server trap-source Loopback0
tacacs server TACACS-SERVER-1
address ipv4 10.4.48.15
key 7 04680E051D2458650C00
!
!
!
control-plane
!
!
!
mgcp profile default
!
!

```

```

!
!
!
gatekeeper
    shutdown
!
!
!
line con 0
    logging synchronous
line aux 0
line vty 0 4
    transport preferred none
    transport input ssh
line vty 5 15
    transport preferred none
    transport input ssh
!
scheduler allocate 20000 1000
ntp source Loopback0
ntp server 10.4.48.17
!
end

```

RS200-D4507

```

version 15.1
no service pad
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
service compress-config
!
hostname RS200-D4507
!
boot-start-marker
license boot level entservices
boot-end-marker

```

```

!
!
enable secret 4 /DtCCr53Q4B18jSImlUEqu7cNVZTOhxTZyUnZdsSrs
!
username admin password 7 141443180F0B7B7977
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
    server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
aaa session-id common
clock timezone PST -8 0
clock summer-time PDT recurring
udld enable

!
ip vrf mgmtVrf
!
ip multicast-routing
ip domain-name cisco.local
ip name-server 10.4.48.10
ip dhcp excluded-address 10.5.1.1 10.5.1.20
ip dhcp excluded-address 10.5.2.1 10.5.2.20
ip dhcp excluded-address 10.5.3.1 10.5.3.20
ip dhcp excluded-address 10.5.4.1 10.5.4.20
!
ip dhcp pool Data_VLAN_1
    network 10.5.1.0 255.255.255.0

```

```

default-router 10.5.1.1
domain-name cisco.local
dns-server 10.4.48.10
!
ip dhcp pool Voice_VLAN_1
network 10.5.2.0 255.255.255.0
default-router 10.5.2.1
domain-name cisco.local
dns-server 10.4.48.10
!
ip dhcp pool Data_VLAN_2
network 10.5.3.0 255.255.255.0
default-router 10.5.3.1
domain-name cisco.local
dns-server 10.4.48.10
!
ip dhcp pool Voice_VLAN_2
network 10.5.4.0 255.255.255.0
default-router 10.5.4.1
domain-name cisco.local
dns-server 10.4.48.10
!
!
!
vtp mode transparent
!
!
!
power redundancy-mode redundant
!
!
!
!
!
spanning-tree mode rapid-pvst
spanning-tree portfast bpduguard default

```

```

spanning-tree extend system-id
spanning-tree vlan 1-4094 priority 24576
!
redundancy
mode sso
!
vlan internal allocation policy ascending
!
vlan 50
name R1-link
!
vlan 54
name R2-link
!
vlan 99
name Transit-net
!
vlan 100
name Data1
!
vlan 101
name Voice1
!
vlan 102
name Data2
!
vlan 103
name Voice2
!
vlan 106
name Management
!
vlan 999
!
ip ssh source-interface Loopback0
ip ssh version 2
!

```

```

class-map match-any MULTIMEDIA-STREAMING-QUEUE
  match dscp af31 af32 af33
class-map match-any CONTROL-MGMT-QUEUE
  match dscp cs7
  match dscp cs6
  match dscp cs3
  match dscp cs2
class-map match-any TRANSACTIONAL-DATA-QUEUE
  match dscp af21 af22 af23
class-map match-any SCAVENGER-QUEUE
  match dscp cs1
class-map match-any MULTIMEDIA-CONFERENCING-QUEUE
  match dscp af41 af42 af43
class-map match-any BULK-DATA-QUEUE
  match dscp af11 af12 af13
class-map match-any PRIORITY-QUEUE
  match dscp ef
  match dscp cs5
  match dscp cs4
!
policy-map 1P7Q1T
  class PRIORITY-QUEUE
    priority
  class CONTROL-MGMT-QUEUE
    bandwidth remaining percent 10
  class MULTIMEDIA-CONFERENCING-QUEUE
    bandwidth remaining percent 10
  class MULTIMEDIA-STREAMING-QUEUE
    bandwidth remaining percent 10
  class TRANSACTIONAL-DATA-QUEUE
    bandwidth remaining percent 10
    db1
  class BULK-DATA-QUEUE
    bandwidth remaining percent 4
    db1
  class SCAVENGER-QUEUE
    bandwidth remaining percent 1

```

```

class class-default
  bandwidth remaining percent 25
  db1
!
!
macro name AccessEdgeQoS
  auto qos voip cisco-phone
@
macro name EgressQoS
  service-policy output 1P7Q1T
@
!
!
interface Loopback0
  ip address 10.5.7.254 255.255.255.255
  ip pim sparse-mode
!
interface Port-channel1
  description EtherChannel link to RS200-3925-1
  switchport
  switchport trunk allowed vlan 50,99
  switchport mode trunk
  ip arp inspection trust
  flowcontrol receive on
  spanning-tree portfast trunk
  ip dhcp snooping trust
!
interface Port-channel2
  description EtherChannel link to RS200-3925-2
  switchport
  switchport trunk allowed vlan 54,99
  switchport mode trunk
  flowcontrol receive on
  spanning-tree portfast trunk
!
interface Port-channel10
  description EtherChannel link to RS200-A3750X

```

```

switchport
switchport trunk native vlan 999
switchport trunk allowed vlan 100,101,106
switchport mode trunk
logging event link-status
flowcontrol receive on
!
interface Port-channel11
description EtherChannel link to RS200-A3750X-PR1
switchport
switchport trunk native vlan 999
switchport trunk allowed vlan 102,103,106
switchport mode trunk
logging event link-status
flowcontrol receive on
!
interface FastEthernet1
ip vrf forwarding mgmtVrf
no ip address
speed auto
duplex auto
!
interface TenGigabitEthernet1/1
description Link to RS200-A3750X Gig1/1/1
switchport trunk native vlan 999
switchport trunk allowed vlan 100,101,106
switchport mode trunk
logging event link-status
logging event trunk-status
macro description EgressQoS
channel-protocol lacp
channel-group 10 mode active
service-policy output 1P7Q1T
!
interface TenGigabitEthernet1/2
description Link to RS200-A3750X-PR1 Gig1/1/1
switchport trunk native vlan 999

```

```

switchport trunk allowed vlan 102,103,106
switchport mode trunk
logging event link-status
logging event trunk-status
macro description EgressQoS
channel-protocol lacp
channel-group 11 mode active
service-policy output 1P7Q1T
!
interface TenGigabitEthernet2/1
description Link to RS200-A3750X Gig2/1/1
switchport trunk native vlan 999
switchport trunk allowed vlan 100,101,106
switchport mode trunk
logging event link-status
logging event trunk-status
macro description EgressQoS
channel-protocol lacp
channel-group 10 mode active
service-policy output 1P7Q1T
!
interface TenGigabitEthernet2/2
description Link to RS200-A3750X-PR1 Gig1/1/2
switchport trunk native vlan 999
switchport trunk allowed vlan 102,103,106
switchport mode trunk
logging event link-status
logging event trunk-status
macro description EgressQoS
channel-protocol lacp
channel-group 11 mode active
service-policy output 1P7Q1T
!
interface TenGigabitEthernet3/1
description Link to RS200-3925-1 Gig0/1
switchport trunk allowed vlan 50,99
switchport mode trunk

```

```

ip arp inspection trust
logging event link-status
logging event trunk-status
macro description EgressQoS
channel-group 1 mode on
service-policy output 1P7Q1T
ip dhcp snooping trust
!
interface TenGigabitEthernet3/2
description Link to RS200-3925-2 Gig0/1
switchport trunk allowed vlan 54,99
switchport mode trunk
logging event link-status
logging event trunk-status
macro description EgressQoS
channel-group 2 mode on
service-policy output 1P7Q1T
!
interface TenGigabitEthernet4/1
description Link to RS200-3925-1 Gig0/2
switchport trunk allowed vlan 50,99
switchport mode trunk
ip arp inspection trust
logging event link-status
logging event trunk-status
macro description EgressQoS
channel-group 1 mode on
service-policy output 1P7Q1T
ip dhcp snooping trust
!
interface TenGigabitEthernet4/2
description Link to RS200-3925-2 Gig0/2
switchport trunk allowed vlan 54,99
switchport mode trunk
logging event link-status
logging event trunk-status
macro description EgressQoS

```

```

channel-group 2 mode on
service-policy output 1P7Q1T
!
interface Vlan1
no ip address
!
interface Vlan50
ip address 10.5.0.2 255.255.255.252
ip pim sparse-mode
!
interface Vlan54
ip address 10.5.0.6 255.255.255.252
ip pim sparse-mode
!
interface Vlan100
description Data VLAN 1
ip address 10.5.1.1 255.255.255.0
ip pim sparse-mode
!
interface Vlan101
description Voice VLAN 1
ip address 10.5.2.1 255.255.255.0
ip pim sparse-mode
!
interface Vlan102
description Data VLAN 2
ip address 10.5.3.1 255.255.255.0
ip pim sparse-mode
!
interface Vlan103
description Voice VLAN 2
ip address 10.5.4.1 255.255.255.0
ip pim sparse-mode
!
interface Vlan106
description RS200 Management VLAN
ip address 10.5.7.1 255.255.255.128

```

```

ip pim sparse-mode
!
!
router eigrp 100
 network 10.5.0.0 0.0.255.255
 passive-interface default
 no passive-interface Vlan50
 no passive-interface Vlan54
 eigrp router-id 10.5.7.254
 nsf
!
no ip http server
ip http authentication aaa
ip http secure-server
ip pim autorp listener
ip pim register-source Loopback0
!
ip tacacs source-interface Loopback0
!
!
logging 10.4.48.35
!
snmp-server community cisco RO
snmp-server community cisco123 RW
snmp-server trap-source Loopback0
snmp-server host 10.4.48.35 cisco123
!
tacacs server TACACS-SERVER-1
 address ipv4 10.4.48.15
 key 7 13361211190910012E3D
!
!
!
line con 0
 exec-timeout 120 0
 stopbits 1
line vty 0 4

```

```

transport preferred none
transport input ssh
line vty 5 15
 transport preferred none
 transport input ssh
!
ntp source Loopback0
ntp update-calendar
ntp server 10.4.48.17
end

```

Remote Site 201: Single-Router, Single-Link with Access-Layer Stack (MPLS-A)

Table 8 - Remote Site 201—IP address information

Location	Net block	Data wired subnet	Voice wired subnet	Loopbacks and switches
Remote Site 201	10.5.40.0/21	10.5.44.0/24 (VLAN 64)	10.5.45.0/24 (VLAN 69)	10.255.251.201 (router) 10.5.44.5 (access switch)

RS201-2911

```

version 15.1
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname RS201-2911
!
boot-start-marker
boot-end-marker
!
!
enable secret 5 $1$Rmfp$Btut/0xCUYDOMlruhEsPt1
!
aaa new-model

```

```

!
!
aaa group server tacacs+ TACACS-SERVERS
    server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authentication login MODULE none
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
!
aaa session-id common
!
clock timezone PST -8 0
clock summer-time PDT recurring
!
no ipv6 cef
ipv6 spd queue min-threshold 62
ipv6 spd queue max-threshold 63
!
!
ip source-route
ip auth-proxy max-login-attempts 5
ip admission max-login-attempts 5
ip cef
!
!
!
ip multicast-routing
!
!
ip domain name cisco.local
ip name-server 10.4.48.10
!

```

```

multilink bundle-name authenticated
!
!
!
!
voice-card 0
!
!
!
!
!
!
license udi pid CISC02911/K9 sn FTX1347A1TN
license boot module c2900 technology-package datak9
hw-module sm 1
!
!
!
username admin password 7 04585A150C2E1D1C5A
!
redundancy
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
class-map match-any DATA
    match dscp af21
class-map match-any BGP-ROUTING
    match protocol bgp
class-map match-any INTERACTIVE-VIDEO
    match dscp cs4 af41
class-map match-any CRITICAL-DATA
    match dscp cs3 af31
class-map match-any VOICE

```

```

match dscp ef
class-map match-any SCAVENGER
match dscp cs1 af11
class-map match-any NETWORK-CRITICAL
match dscp cs2 cs6
!
!
policy-map MARK-BGP
class BGP-ROUTING
set dscp cs6
policy-map WAN
class VOICE
priority percent 10
class INTERACTIVE-VIDEO
priority percent 23
class CRITICAL-DATA
bandwidth percent 15
random-detect dscp-based
class DATA
bandwidth percent 19
random-detect dscp-based
class SCAVENGER
bandwidth percent 5
class NETWORK-CRITICAL
bandwidth percent 3
service-policy MARK-BGP
class class-default
bandwidth percent 25
random-detect
policy-map WAN-INTERFACE-G0/0
class class-default
shape average 10000000
service-policy WAN
!
!
!
!
```

```

interface Loopback0
ip address 10.255.251.201 255.255.255.255
ip pim sparse-mode
!
interface Port-channel1
description EtherChannel link to RS201-A2960S
no ip address
hold-queue 150 in
!
interface Port-channel1.64
description Wired Data
encapsulation dot1Q 64
ip address 10.5.44.1 255.255.255.0
ip helper-address 10.4.48.10
ip pim sparse-mode
!
interface Port-channel1.69
description Wired Voice
encapsulation dot1Q 69
ip address 10.5.45.1 255.255.255.0
ip helper-address 10.4.48.10
ip pim sparse-mode
!
interface GigabitEthernet0/0
bandwidth 10000
ip address 192.168.3.21 255.255.255.252
duplex auto
speed auto
no cdp enable
service-policy output WAN-INTERFACE-G0/0
!
interface GigabitEthernet0/1
description RS201-A2960S Gig2/0/24
no ip address
duplex auto
speed auto
channel-group 1
```

```

!
interface GigabitEthernet0/2
  description RS201-A2960S Gig1/0/24
  no ip address
  duplex auto
  speed auto
  channel-group 1
!
interface Vlan1
  no ip address
!
!
!
!
router bgp 65511
  bgp router-id 10.255.251.201
  bgp log-neighbor-changes
  network 10.5.44.0 mask 255.255.255.0
  network 10.5.45.0 mask 255.255.255.0
  network 10.255.251.201 mask 255.255.255.255
  network 192.168.3.20 mask 255.255.255.252
  aggregate-address 10.5.40.0 255.255.248.0 summary-only
  neighbor 192.168.3.22 remote-as 65401
!
ip forward-protocol nd
!
ip pim autorp listener
ip pim register-source Loopback0
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!
ip tacacs source-interface Loopback0
!
!
logging 10.4.48.35

```

```

access-list 55 permit 10.4.48.0 0.0.0.255
!
!
!
!
!
snmp-server community cisco RO 55
snmp-server community cisco123 RW 55
snmp-server trap-source Loopback0
tacacs server TACACS-SERVER-1
  address ipv4 10.4.48.15
  key 7 0538030C33495A221C1C
!
!
!
!
control-plane
!
!
!
mgcp profile default
!
!
!
!
!
gatekeeper
  shutdown
!
!
!
line con 0
  logging synchronous
line aux 0
line vty 0 4
  access-class 55 in
  transport preferred none
  transport input ssh

```

```

line vty 5 15
  access-class 55 in
  transport preferred none
  transport input ssh
!
scheduler allocate 20000 1000
ntp source Loopback0
ntp server 10.4.48.17
!
end

```

Remote Site 202: Single-Router, Single-Link (MPLS-B)

Table 9 - Remote Site 202—IP address information

Location	Net block	Data wired subnet	Voice wired subnet	Loopbacks and switches
Remote Site 202	10.5.64.0/21	10.5.68.0/24 (VLAN 64)	10.5.69.0/24 (VLAN 69)	10.255.252.202 (router) 10.5.68.5 (access switch)

RS202-2911

```

version 15.1
service config
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname RS202-2911
!
boot-start-marker
boot-end-marker
!
!
enable secret 4 /DtCCr53Q4B18jSIm1UEqu7cNVZT0hxTZyUnZdsSrsW

```

```

!
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
  server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
!
aaa session-id common
!
clock timezone PST -8 0
clock summer-time PDT recurring
!
no ipv6 cef
ip source-route
ip cef
!
!
ip multicast-routing
!
!
ip domain name cisco.local
multilink bundle-name authenticated
!
!
!
!
!
voice-card 0
!

```

```

!
!
!
!
!
license udi pid CISCO2911/K9 sn FTX1347A1TC
!
!
username admin password 7 0205554808095E731F
!
redundancy
!
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
class-map match-any DATA
  match dscp af21
class-map match-any BGP-ROUTING
  match protocol bgp
class-map match-any INTERACTIVE-VIDEO
  match dscp cs4 af41
class-map match-any CRITICAL-DATA
  match dscp cs3 af31
class-map match-any VOICE
  match dscp ef
class-map match-any SCAVENGER
  match dscp cs1 af11
class-map match-any NETWORK-CRITICAL
  match dscp cs2 cs6
!
!
policy-map MARK-BGP
  class BGP-ROUTING

```

```

    set dscp cs6
policy-map WAN
  class VOICE
    priority percent 10
  class INTERACTIVE-VIDEO
    priority percent 23
  class CRITICAL-DATA
    bandwidth percent 15
    random-detect dscp-based
  class DATA
    bandwidth percent 19
    random-detect dscp-based
  class SCAVENGER
    bandwidth percent 5
  class NETWORK-CRITICAL
    bandwidth percent 3
    service-policy MARK-BGP
  class class-default
    bandwidth percent 25
    random-detect
policy-map WAN-INTERFACE-G0/0
  class class-default
    shape average 10000000
    service-policy WAN
!
!
!
interface Loopback0
  ip address 10.255.252.202 255.255.255.255
  ip pim sparse-mode
!
interface GigabitEthernet0/0
  bandwidth 10000
  ip address 192.168.4.5 255.255.255.252
  duplex auto
  speed auto
  no cdp enable

```

```

service-policy output WAN-INTERFACE-G0/0
!
interface GigabitEthernet0/2
  no ip address
  duplex auto
  speed auto
!
interface GigabitEthernet0/2.64
  description Wired Data
  encapsulation dot1Q 64
  ip address 10.5.68.1 255.255.255.0
  ip helper-address 10.4.48.10
  ip pim sparse-mode
!
interface GigabitEthernet0/2.69
  description Wired Voice
  encapsulation dot1Q 69
  ip address 10.5.69.1 255.255.255.0
  ip helper-address 10.4.48.10
  ip pim sparse-mode
!
!
router bgp 65511
  bgp router-id 10.255.252.202
  bgp log-neighbor-changes
  network 10.5.68.0 mask 255.255.255.0
  network 10.5.69.0 mask 255.255.255.0
  network 10.255.252.202 mask 255.255.255.255
  network 192.168.4.4 mask 255.255.255.252
  aggregate-address 10.5.64.0 255.255.248.0 summary-only
  neighbor 192.168.4.6 remote-as 65402
!
ip forward-protocol nd
!
ip pim autorp listener
ip pim register-source Loopback0
no ip http server

```

```

ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!
ip tacacs source-interface Loopback0
!
!
logging 10.4.48.35
!
!
!
!
!
snmp-server community cisco RO
snmp-server community cisco123 RW
snmp-server trap-source Loopback0
tacacs server TACACS-SERVER-1
  address ipv4 10.4.48.15
  key 7 122A0014000E182F2F32
!
!
!
control-plane
!
!
!
mgcp profile default
!
!
!
!
!
gatekeeper
  shutdown
!
!
!
!

```

```

line con 0
  logging synchronous
line aux 0
line vty 0 4
  transport preferred none
  transport input ssh
line vty 5 15
  transport preferred none
  transport input ssh
!
scheduler allocate 20000 1000
ntp source Loopback0
ntp server 10.4.48.17
!
end

```

Remote Site 203: Single-Router, Single-Link with Access Layer Stack (MPLS-A)

Table 10 - Remote Site 203—IP address information

Location	Net block	Data wired subnet	Voice wired subnet	Loopbacks and switches
Remote Site 203	10.5.48.0/21	10.5.52.0/24 (VLAN 64)	10.5.53.0/24 (VLAN 69)	10.255.251.203 (router) 10.5.52.5 (access switch)

RS203-2921-1

```

version 15.1
service config
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname RS202-2911
!

```

```

boot-start-marker
boot-end-marker
!
!
enable secret 4 /DtCCr53Q4B18jSIm1UEqu7cNVZTOhxTZyUnZdsSrs
!
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
  server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
!
aaa session-id common
!
clock timezone PST -8 0
clock summer-time PDT recurring
!
no ipv6 cef
ip source-route
ip cef
!
!
ip multicast-routing
!
!
ip domain name cisco.local
multilink bundle-name authenticated
!
!

```

```

!
!
!
voice-card 0
!
!
!
!
!
!
!
license udi pid CISCO2911/K9 sn FTX1347A1TC
!
!
username admin password 7 0205554808095E731F
!
redundancy
!
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
class-map match-any DATA
    match dscp af21
class-map match-any BGP-ROUTING
    match protocol bgp
class-map match-any INTERACTIVE-VIDEO
    match dscp cs4 af41
class-map match-any CRITICAL-DATA
    match dscp cs3 af31
class-map match-any VOICE
    match dscp ef
class-map match-any SCAVENGER
    match dscp cs1 af11
class-map match-any NETWORK-CRITICAL

```

```

    match dscp cs2 cs6
!
!
policy-map MARK-BGP
    class BGP-ROUTING
        set dscp cs6
policy-map WAN
    class VOICE
        priority percent 10
    class INTERACTIVE-VIDEO
        priority percent 23
    class CRITICAL-DATA
        bandwidth percent 15
        random-detect dscp-based
    class DATA
        bandwidth percent 19
        random-detect dscp-based
    class SCAVENGER
        bandwidth percent 5
    class NETWORK-CRITICAL
        bandwidth percent 3
        service-policy MARK-BGP
    class class-default
        bandwidth percent 25
        random-detect
policy-map WAN-INTERFACE-G0/0
    class class-default
        shape average 20000000
        service-policy WAN
!
!
!
interface Loopback0
    ip address 10.255.252.202 255.255.255.255
    ip pim sparse-mode
!
interface GigabitEthernet0/0

```

```

bandwidth 20000
ip address 192.168.4.5 255.255.255.252
duplex auto
speed auto
no cdp enable
service-policy output WAN-INTERFACE-G0/0
!
interface GigabitEthernet0/2
no ip address
duplex auto
speed auto
!
interface GigabitEthernet0/2.64
description Wired Data
encapsulation dot1Q 64
ip address 10.5.68.1 255.255.255.0
ip helper-address 10.4.48.10
ip pim sparse-mode
!
interface GigabitEthernet0/2.69
description Wired Voice
encapsulation dot1Q 69
ip address 10.5.69.1 255.255.255.0
ip helper-address 10.4.48.10
ip pim sparse-mode
!
!
router bgp 65511
bgp router-id 10.255.252.202
bgp log-neighbor-changes
network 10.5.68.0 mask 255.255.255.0
network 10.5.69.0 mask 255.255.255.0
network 10.255.252.202 mask 255.255.255.255
network 192.168.4.4 mask 255.255.255.252
aggregate-address 10.5.64.0 255.255.248.0 summary-only
neighbor 192.168.4.6 remote-as 65402
!

```

```

ip forward-protocol nd
!
ip pim autorp listener
ip pim register-source Loopback0
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!
ip tacacs source-interface Loopback0
!
!
logging 10.4.48.35
!
!
!
!
!
snmp-server community cisco RO
snmp-server community cisco123 RW
snmp-server trap-source Loopback0
tacacs server TACACS-SERVER-1
address ipv4 10.4.48.15
key 7 122A0014000E182F2F32
!
!
!
control-plane
!
!
!
mgcp profile default
!
!
!
!
!
!

```

```

gatekeeper
  shutdown
!
!
!
line con 0
  logging synchronous
line aux 0
line vty 0 4
  transport preferred none
  transport input ssh
line vty 5 15
  transport preferred none
  transport input ssh
!
scheduler allocate 20000 1000
ntp source Loopback0
ntp server 10.4.48.17
!
end

```

Remote Site 204: Single-Router, Single-Link (MPLS-A)

Table 11 - Remote Site 204—IP address information

Location	Net block	Data wired subnet	Voice wired subnet	Loopbacks and switches
Remote Site 204	10.5.56.0/21	10.5.60.0/24 (VLAN 64)	10.5.61.0/24 (VLAN 69)	10.255.251.204 (router) 10.5.60.5 (access switch)

RS204-1941

```

version 15.1
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption

```

```

!
hostname RS204-1941
!
boot-start-marker
boot-end-marker
!
!
no logging console
enable secret 5 $1$RrQw$FEwDKjP09Uafh7ycdtSkE0
!
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
  server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
!
aaa session-id common
!
clock timezone PST -8 0
clock summer-time PDT recurring
!
no ipv6 cef
ip source-route
ip auth-proxy max-login-attempts 5
ip admission max-login-attempts 5
ip cef
!
!
!

```

```

ip multicast-routing
!
!
ip domain name cisco.local
ip name-server 10.4.48.10
!
multilink bundle-name authenticated
!
license udi pid CISCO1941/K9 sn FTX140980GQ
license boot module c1900 technology-package datak9
!
!
username admin password 7 011057175804575D72
!
redundancy
!
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
class-map match-any DATA
  match dscp af21
class-map match-any BGP-ROUTING
  match protocol bgp
class-map match-any INTERACTIVE-VIDEO
  match dscp cs4 af41
class-map match-any CRITICAL-DATA
  match dscp cs3 af31
class-map match-any VOICE
  match dscp ef
class-map match-any SCAVENGER
  match dscp cs1 af11
class-map match-any NETWORK-CRITICAL
  match dscp cs2 cs6
!

```

```

!
policy-map MARK-BGP
  class BGP-ROUTING
    set dscp cs6
policy-map WAN
  class VOICE
    priority percent 10
  class INTERACTIVE-VIDEO
    priority percent 23
  class CRITICAL-DATA
    bandwidth percent 15
    random-detect dscp-based
  class DATA
    bandwidth percent 19
    random-detect dscp-based
  class SCAVENGER
    bandwidth percent 5
  class NETWORK-CRITICAL
    bandwidth percent 3
    service-policy MARK-BGP
  class class-default
    bandwidth percent 25
    random-detect
policy-map WAN-INTERFACE-G0/0
  class class-default
    shape average 2000000
    service-policy WAN
!
!
!
!
!
interface Loopback0
  ip address 10.255.251.204 255.255.255.255
  ip pim sparse-mode
!
interface GigabitEthernet0/0

```

```

description Link to MPLS-A
bandwidth 2000
ip address 192.168.3.29 255.255.255.252
duplex auto
speed auto
no cdp enable
service-policy output WAN-INTERFACE-G0/0
!
interface GigabitEthernet0/1
description RS204-A2960S Gig1/0/24
no ip address
duplex auto
speed auto
!
interface GigabitEthernet0/1.64
description Wired Data
encapsulation dot1Q 64
ip address 10.5.60.1 255.255.255.0
ip helper-address 10.4.48.10
ip pim sparse-mode
!
interface GigabitEthernet0/1.69
description Wired Voice
encapsulation dot1Q 69
ip address 10.5.61.1 255.255.255.0
ip helper-address 10.4.48.10
ip pim sparse-mode
!
router bgp 65511
bgp router-id 10.255.251.204
bgp log-neighbor-changes
network 10.5.60.0 mask 255.255.255.0
network 10.5.61.0 mask 255.255.255.0
network 10.255.251.204 mask 255.255.255.255
network 192.168.3.28 mask 255.255.255.252
aggregate-address 10.5.56.0 255.255.248.0 summary-only
neighbor 192.168.3.30 remote-as 65401

```

```

!
ip forward-protocol nd
!
ip pim autorp listener
ip pim register-source Loopback0
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!
ip tacacs source-interface Loopback0
!
ip sla responder
logging 10.4.48.35
!
!
!
!
!
snmp-server community cisco RO
snmp-server community cisco123 RW
snmp-server trap-source Loopback0
tacacs server TACACS-SERVER-1
address ipv4 10.4.48.15
key 7 0812494D1B1C113C1712
!
!
!
control-plane
!
!
line con 0
line aux 0
line 2
no activation-character
no exec
transport preferred none

```

```

transport input all
transport output pad telnet rlogin lapb-ta mop udptn v120 ssh
stopbits 1
line vty 0 4
  transport preferred none
  transport input ssh
line vty 5 15
  transport preferred none
  transport input ssh
!
scheduler allocate 20000 1000
ntp source Loopback0
ntp server 10.4.48.17
!
end

```

Remote Site 206: Dual-Router, Dual-Link with Access-Layer Stack (MPLS-A/MPLS-B)

Table 12 - Remote Site 206—IP address information

Location	Net block	Data wired subnet	Voice wired subnet	Loopbacks and switches
Remote Site 206	10.5.8.0/21	10.5.12.0/24 (VLAN 64)	10.5.13.0/24 (VLAN 69)	10.255.251.206 (router 1) 10.255.252.206 (router 2) 10.5.12.5 (access switch)

RS206-3925-1

```

version 15.1
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname RS206-3925-1
!

```

```

boot-start-marker
boot-end-marker
!
!
enable secret 5 $1$E6Pr$6ve4899UvKc3Ep931aMCV/
!
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
  server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
!
aaa session-id common
!
clock timezone PST -8 0
clock summer-time PDT recurring
!
no ipv6 cef
ipv6 spd queue min-threshold 62
ipv6 spd queue max-threshold 63
ip source-route
ip auth-proxy max-login-attempts 5
ip admission max-login-attempts 5
ip cef
!
!
!
ip multicast-routing
!

```

```

!
ip domain name cisco.local
!
multilink bundle-name authenticated
!
!
!
!
!
voice-card 0
!
!
!
!
!
!
license udi pid CISCO3900-MPE120 sn FHH13030040
license boot module c3900 technology-package securityk9
hw-module sm 1
!
!
!
username admin password 7 0508571C22431F5B4A
!
redundancy
!
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
track 50 ip sla 100 reachability
!
class-map match-any DATA
  match dscp af21

```

```

class-map match-any BGP-ROUTING
  match protocol bgp
class-map match-any INTERACTIVE-VIDEO
  match dscp cs4 af41
class-map match-any CRITICAL-DATA
  match dscp cs3 af31
class-map match-any VOICE
  match dscp ef
class-map match-any SCAVENGER
  match dscp cs1 af11
class-map match-any NETWORK-CRITICAL
  match dscp cs2 cs6
!
!
policy-map MARK-BGP
  class BGP-ROUTING
    set dscp cs6
policy-map WAN
  class VOICE
    priority percent 10
  class INTERACTIVE-VIDEO
    priority percent 23
  class CRITICAL-DATA
    bandwidth percent 15
    random-detect dscp-based
  class DATA
    bandwidth percent 19
    random-detect dscp-based
  class SCAVENGER
    bandwidth percent 5
  class NETWORK-CRITICAL
    bandwidth percent 3
    service-policy MARK-BGP
  class class-default
    bandwidth percent 25
    random-detect
policy-map WAN-INTERFACE-G0/0

```

```

class class-default
  shape average 50000000
  service-policy WAN
!
!
!
!
!
!
interface Loopback0
  ip address 10.255.251.206 255.255.255.255
  ip pim sparse-mode
!
interface Port-channel1
  description EtherChannel Link to RS206-A2960S
  no ip address
  hold-queue 150 in
!
interface Port-channel1.64
  description Wired Data
  encapsulation dot1Q 64
  ip address 10.5.12.2 255.255.255.0
  ip helper-address 10.4.48.10
  ip pim dr-priority 110
  ip pim sparse-mode
  standby version 2
  standby 1 ip 10.5.12.1
  standby 1 priority 110
  standby 1 preempt
  standby 1 authentication md5 key-string 7 110A4816141D5A5E57
  standby 1 track 50 decrement 10
!
interface Port-channel1.69
  description Wired Voice
  encapsulation dot1Q 69
  ip address 10.5.13.2 255.255.255.0
  ip helper-address 10.4.48.10

```

```

  ip pim dr-priority 110
  ip pim sparse-mode
  standby version 2
  standby 1 ip 10.5.13.1
  standby 1 priority 110
  standby 1 preempt
  standby 1 authentication md5 key-string 7 130646010803557878
  standby 1 track 50 decrement 10
!
interface Port-channel1.99
  description Transit Network
  encapsulation dot1Q 99
  ip address 10.5.8.1 255.255.255.252
  ip pim sparse-mode
!
interface GigabitEthernet0/0
  bandwidth 50000
  ip address 192.168.3.9 255.255.255.252
  duplex auto
  speed auto
  no cdp enable
  service-policy output WAN-INTERFACE-G0/0
!
interface GigabitEthernet0/1
  no ip address
  duplex auto
  speed auto
  channel-group 1
!
interface GigabitEthernet0/2
  no ip address
  duplex auto
  speed auto
  channel-group 1
!
interface Vlan1
  no ip address

```

```

!
!
router eigrp 100
  default-metric 50000 100 255 1 1500
  network 10.5.0.0 0.0.255.255
  network 10.255.0.0 0.0.255.255
  redistribute bgp 65511
  passive-interface default
  no passive-interface Port-channel1.99
  eigrp router-id 10.255.251.206
!
router bgp 65511
  bgp router-id 10.255.251.206
  bgp log-neighbor-changes
  network 10.5.12.0 mask 255.255.255.0
  network 10.5.13.0 mask 255.255.255.0
  network 10.255.251.206 mask 255.255.255.255
  network 10.255.252.206 mask 255.255.255.255
  network 192.168.3.8 mask 255.255.255.252
  aggregate-address 10.5.8.0 255.255.248.0 summary-only
  neighbor 10.5.8.2 remote-as 65511
  neighbor 10.5.8.2 next-hop-self
  neighbor 192.168.3.10 remote-as 65401
  neighbor 192.168.3.10 route-map PREFER-MPLS-A in
  neighbor 192.168.3.10 route-map NO-TRANSIT-AS out
!
ip forward-protocol nd
!
ip as-path access-list 1 permit _65401$
ip as-path access-list 10 permit ^$
ip pim autorp listener
ip pim register-source Loopback0
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!

```

```

ip tacacs source-interface Loopback0
!
!
ip sla 100
  icmp-echo 192.168.3.10 source-interface GigabitEthernet0/0
  threshold 1000
  timeout 1000
  frequency 15
ip sla schedule 100 life forever start-time now
logging 10.4.48.35
access-list 55 permit 10.4.48.0 0.0.0.255
!
!
!
!
nls resp-timeout 1
cpd cr-id 1
route-map NO-TRANSIT-AS permit 10
  match as-path 10
!
route-map PREFER-MPLS-A permit 10
  match as-path 1
  set local-preference 200
!
route-map PREFER-MPLS-A permit 20
!
!
snmp-server community cisco RO 55
snmp-server community cisco123 RW 55
snmp-server trap-source Loopback0
tacacs server TACACS-SERVER-1
  address ipv4 10.4.48.15
  key 7 0538030C33495A221C1C
!
!
!
control-plane

```

```

!
!
mgcp profile default
!
!
!
!
!
gatekeeper
  shutdown
!
!
!
line con 0
  logging synchronous
line aux 0
line vty 0 4
  access-class 55 in
  transport preferred none
  transport input ssh
line vty 5 15
  access-class 55 in
  transport preferred none
  transport input ssh
!
scheduler allocate 20000 1000
ntp source Loopback0
ntp server 10.4.48.17
!
end

```

RS206-3925-2

```

version 15.1
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!

```

```

hostname RS206-3925-2
!
boot-start-marker
boot-end-marker
!
!
enable secret 5 $1$fWE4$yQItBXlCdkeFFiUhHQXTe0
!
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
  server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
!
aaa session-id common
!
clock timezone PST -8 0
clock summer-time PDT recurring
!
no ipv6 cef
ipv6 spd queue min-threshold 62
ipv6 spd queue max-threshold 63
ip source-route
ip auth-proxy max-login-attempts 5
ip admission max-login-attempts 5
ip cef
!
!
!

```

```

ip multicast-routing
!
!
ip domain name cisco.local
!
multilink bundle-name authenticated
!
!
!
!
!
voice-card 0
!
!
!
!
!
!
!
license udi pid C3900-SPE100/K9 sn FOC134601WE
hw-module sm 1
!
!
!
username admin password 7 121A540411045D5679
!
redundancy
!
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
class-map match-any DATA
  match dscp af21
class-map match-any BGP-ROUTING

```

```

  match protocol bgp
class-map match-any INTERACTIVE-VIDEO
  match dscp cs4 af41
class-map match-any CRITICAL-DATA
  match dscp cs3 af31
class-map match-any VOICE
  match dscp ef
class-map match-any SCAVENGER
  match dscp cs1 af11
class-map match-any NETWORK-CRITICAL
  match dscp cs2 cs6
!
!
policy-map MARK-BGP
  class BGP-ROUTING
    set dscp cs6
policy-map WAN
  class VOICE
    priority percent 10
  class INTERACTIVE-VIDEO
    priority percent 23
  class CRITICAL-DATA
    bandwidth percent 15
    random-detect dscp-based
  class DATA
    bandwidth percent 19
    random-detect dscp-based
  class SCAVENGER
    bandwidth percent 5
  class NETWORK-CRITICAL
    bandwidth percent 3
    service-policy MARK-BGP
  class class-default
    bandwidth percent 25
    random-detect
policy-map WAN-INTERFACE-G0/1
  class class-default

```

```

    shape average 25000000
    service-policy WAN
!
!
!
!
!
interface Loopback0
    ip address 10.255.252.206 255.255.255.255
    ip pim sparse-mode
!
interface Port-channel2
    description EtherChannel Link to RS206-A2960S
    no ip address
    hold-queue 150 in
!
interface Port-channel2.64
    description Wired Data
    encapsulation dot1Q 64
    ip address 10.5.12.3 255.255.255.0
    ip helper-address 10.4.48.10
    ip pim dr-priority 105
    ip pim sparse-mode
    standby version 2
    standby 1 ip 10.5.12.1
    standby 1 priority 105
    standby 1 preempt
    standby 1 authentication md5 key-string 7 104D580A061843595F
!
interface Port-channel2.69
    description Wired Voice
    encapsulation dot1Q 69
    ip address 10.5.13.3 255.255.255.0
    ip helper-address 10.4.48.10
    ip pim dr-priority 105
    ip pim sparse-mode
    standby version 2

```

```

    standby 1 ip 10.5.13.1
    standby 1 priority 105
    standby 1 preempt
    standby 1 authentication md5 key-string 7 110A4816141D5A5E57
!
interface Port-channel2.99
    description Transit Network
    encapsulation dot1Q 99
    ip address 10.5.8.2 255.255.255.252
!
interface GigabitEthernet0/0
    bandwidth 25000
    ip address 192.168.4.9 255.255.255.252
    ip pim sparse-mode
    duplex auto
    speed auto
!
interface GigabitEthernet0/1
    no ip address
    duplex auto
    speed auto
    channel-group 2
!
interface GigabitEthernet0/2
    no ip address
    duplex auto
    speed auto
    channel-group 2
!
interface Vlan1
    no ip address
!
!
router eigrp 100
    default-metric 25000 100 255 1 1500
    network 10.5.0.0 0.0.255.255
    network 10.255.0.0 0.0.255.255

```

```

redistribute bgp 65511
passive-interface default
no passive-interface Port-channel2.99
eigrp router-id 10.255.252.206
!
router bgp 65511
  bgp router-id 10.255.252.206
  bgp log-neighbor-changes
  network 10.5.12.0 mask 255.255.255.0
  network 10.5.13.0 mask 255.255.255.0
  network 10.255.251.206 mask 255.255.255.255
  network 10.255.252.206 mask 255.255.255.255
  network 192.168.4.8 mask 255.255.255.252
  aggregate-address 10.5.8.0 255.255.248.0 summary-only
  neighbor 10.5.8.1 remote-as 65511
  neighbor 10.5.8.1 next-hop-self
  neighbor 192.168.4.10 remote-as 65402
  neighbor 192.168.4.10 route-map NO-TRANSIT-AS out
!
ip forward-protocol nd
!
ip as-path access-list 10 permit ^$
ip pim autorp listener
ip pim register-source Loopback0
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!
ip tacacs source-interface Loopback0
!
!
logging 10.4.48.35
access-list 55 permit 10.4.48.0 0.0.0.255
!
!
!
```

```

!
nls resp-timeout 1
cpd cr-id 1
route-map NO-TRANSIT-AS permit 10
  match as-path 10
!
!
snmp-server community cisco RO 55
snmp-server community cisco123 RW 55
snmp-server trap-source Loopback0
tacacs server TACACS-SERVER-1
  address ipv4 10.4.48.15
  key 7 0538030C33495A221C1C
!
!
!
control-plane
!
!
mgcp profile default
!
!
!
!
gatekeeper
  shutdown
!
!
!
line con 0
  logging synchronous
line aux 0
line vty 0 4
  access-class 55 in
  transport preferred none
  transport input ssh
```

```

line vty 5 15
  access-class 55 in
  transport preferred none
  transport input ssh
!
scheduler allocate 20000 1000
ntp source Loopback0
ntp server 10.4.48.17
!
end

```

Remote Site 207: Single-Router, Dual-Link (MPLS-A/MPLS-B)

Table 13 - Remote Site 207—IP address information

Location	Net block	Data wired subnet	Voice wired subnet	Loopbacks and switches
Remote Site 207	10.5.16.0/21	10.5.20.0/24 (VLAN 64)	10.5.21.0/24 (VLAN 69)	10.255.251.207 (router) 10.5.20.5 (access switch)

RS207-2921

```

version 15.1
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname RS207-2921
!
boot-start-marker
boot-end-marker
!
!
enable secret 5 $1$QTJi$3MjRbu2d.MfadRwjWExUr.
!
aaa new-model

```

```

!
!
aaa group server tacacs+ TACACS-SERVERS
  server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
aaa session-id common
!
clock timezone PST -8 0
clock summer-time PDT recurring
!
no ipv6 cef
!
ip source-route
ip cef
!
!
!
ip multicast-routing
!
!
ip domain name cisco.local
ip name-server 10.4.48.10
!
multilink bundle-name authenticated
!
!
!
!
!

```

```

voice-card 0
!
!
!
!
!
!
license udi pid CISCO2921/K9 sn FHK1345F209
hw-module pvdm 0/0
!
!
!
username admin password 7 104D580A061843595F
!
redundancy
!
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
class-map match-any DATA
  match dscp af21
class-map match-any BGP-ROUTING
  match protocol bgp
class-map match-any INTERACTIVE-VIDEO
  match dscp cs4 af41
class-map match-any CRITICAL-DATA
  match dscp cs3 af31
class-map match-any VOICE
  match dscp ef
class-map match-any SCAVENGER
  match dscp cs1 af11
class-map match-any NETWORK-CRITICAL
  match dscp cs2 cs6

```

```

!
!
policy-map MARK-BGP
  class BGP-ROUTING
    set dscp cs6
policy-map WAN
  class VOICE
    priority percent 10
  class INTERACTIVE-VIDEO
    priority percent 23
  class CRITICAL-DATA
    bandwidth percent 15
    random-detect dscp-based
  class DATA
    bandwidth percent 19
    random-detect dscp-based
  class SCAVENGER
    bandwidth percent 5
  class NETWORK-CRITICAL
    bandwidth percent 3
    service-policy MARK-BGP
  class class-default
    bandwidth percent 25
    random-detect
policy-map WAN-INTERFACE-G0/1
  class class-default
    shape average 10000000
    service-policy WAN
policy-map WAN-INTERFACE-G0/0
  class class-default
    shape average 20000000
    service-policy WAN
!
!
!
!
!

```

```

!
interface Loopback0
 ip address 10.255.251.207 255.255.255.255
 ip pim sparse-mode
!
interface GigabitEthernet0/0
 description MPLS A WAN Uplink
 bandwidth 20000
 ip address 192.168.3.13 255.255.255.252
 ip pim sparse-mode
 duplex auto
 speed auto
 no cdp enable
 service-policy output WAN-INTERFACE-G0/0
!
interface GigabitEthernet0/1
 description MPLS B WAN Uplink
 bandwidth 10000
 ip address 192.168.4.13 255.255.255.252
 ip pim sparse-mode
 duplex auto
 speed auto
 no cdp enable
 service-policy output WAN-INTERFACE-G0/1
!
interface GigabitEthernet0/2
 no ip address
 duplex auto
 speed auto
!
interface GigabitEthernet0/2.64
 description Wired Data
 encapsulation dot1Q 64
 ip address 10.5.20.1 255.255.255.0
 ip helper-address 10.4.48.10
 ip pim sparse-mode
!

```

```

interface GigabitEthernet0/2.69
 description Wired Voice
 encapsulation dot1Q 69
 ip address 10.5.21.1 255.255.255.0
 ip helper-address 10.4.48.10
 ip pim sparse-mode
!
!
router bgp 65511
 bgp router-id 10.255.251.207
 bgp log-neighbor-changes
 network 10.5.20.0 mask 255.255.255.0
 network 10.5.21.0 mask 255.255.255.0
 network 10.255.251.207 mask 255.255.255.255
 network 192.168.3.12 mask 255.255.255.252
 network 192.168.4.12 mask 255.255.255.252
 aggregate-address 10.5.16.0 255.255.248.0 summary-only
 neighbor 192.168.3.14 remote-as 65401
 neighbor 192.168.3.14 route-map PREFER-MPLS-A in
 neighbor 192.168.3.14 route-map NO-TRANSIT-AS out
 neighbor 192.168.4.14 remote-as 65402
 neighbor 192.168.4.14 route-map NO-TRANSIT-AS out
!
ip forward-protocol nd
!
ip as-path access-list 1 permit _65401$
ip as-path access-list 10 permit ^$
ip pim autorp listener
ip pim register-source Loopback0
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!
ip tacacs source-interface Loopback0
!
logging 10.4.48.35

```

```

!
!
!
!
route-map NO-TRANSIT-AS permit 10
  match as-path 10
!
route-map PREFER-MPLS-A permit 10
  match as-path 1
  set local-preference 200
!
route-map PREFER-MPLS-A permit 20
!
!
snmp-server community cisco RO
snmp-server community cisco123 RW
snmp-server trap-source Loopback0
tacacs server TACACS-SERVER-1
  address ipv4 10.4.48.15
  key 7 0538030C33495A221C1C
!
!
!
control-plane
!
!
mgcp fax t38 ecm
!
mgcp profile default
!
!
!
!
!
gatekeeper
  shutdown
!

```

```

!
!
line con 0
  logging synchronous
line aux 0
line vty 0 4
  transport preferred none
  transport input ssh
line vty 5 15
  transport preferred none
  transport input ssh
!
scheduler allocate 20000 1000
ntp source Loopback0
ntp server 10.4.48.17
!
end

```

Remote Site 208: Dual-router, Dual-Link with Distribution Layer (MPLS-A/MPLS-B)

Table 14 - Remote Site 208—IP address information

Location	Net block	Data wired subnet	Voice wired subnet	Loopbacks and switches
Remote Site 208	10.5.80.0/21	10.5.81.0/24 (VLAN 100) 10.5.83.0/24 (VLAN 102)	10.5.82.0/24 (VLAN 101) 10.5.84.0/24 (VLAN 103)	10.255.251.208 (router 1) 10.255.252.208 (router 2) 10.5.87.254 (distribution switch) 10.5.87.2 (access switch 1) 10.5.87.3 (access switch 2) 10.5.87.4 (access switch 3)

The following two tables provide additional information to connect to the distribution layer.

Table 15 - Remote Site 208—router connections to distribution layer

Remote-site information		Connection to distribution layer switch			Port-Channel subinterface and IP assignments		
Location	Net block	Router	Port channel	Member interfaces	Subinterface	VLAN	Network
Remote Site 208	10.5.80.0/21	RS208-2951-1	1	gig0/1 gig0/2	Port-channel1.50	50	10.5.80.0/30
					Port-channel1.99 (transit network)	99	10.5.80.8/30
		RS208-2951-2	2	gig0/1 gig0/2	Port-channel2.54	54	10.5.80.4/30
					Port-channel2.99 (transit network)	99	10.5.80.8/30

Table 16 - Remote Site 208—distribution layer switch connections

Port channel	Member interfaces	Layer3/Layer2	Connected device
1	gig1/0/12 gig2/0/12	Layer 2 (VLAN 50, 99)	RS208-2951-1
2	gig1/0/11 gig2/0/11	Layer 2 (VLAN 54, 99)	RS208-2951-2
10	gig1/0/1 gig2/0/1	Layer 2 (VLAN 100,101,106)	RS208-A2960S
11	gig1/0/2 gig2/0/2	Layer 2 (VLAN 102,103,106)	RS208-A3560X-PR1
12	gig1/0/3 gig2/0/3	Layer 2 (VLAN 102,103,106)	RS208-A3750X-PR2

RS208-2951-1

```
version 15.1
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname RS208-2951-1
!
boot-start-marker
boot-end-marker
!
!
enable secret 4 /DtCCr53Q4B18jSImlUEqu7cNVZTOhxTZyUnZdsSrsW
!
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
    server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authentication login MODULE none
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!
!
!
aaa session-id common
!
clock timezone PST -8 0
clock summer-time PDT recurring
!
no ipv6 cef
!
!
```

```
ip source-route
ip cef
!
!
!
ip multicast-routing
!
!
ip domain name cisco.local
!
multilink bundle-name authenticated
!
!
!
!
!
voice-card 0
!
!
!
!
!
license udi pid CISCO2951/K9 sn FTX1502AJ0E
hw-module sm 2
!
!
!
username admin password 7 141443180F0B7B7977
!
redundancy
!
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
```

```

class-map match-any DATA
  match dscp af21
class-map match-any BGP-ROUTING
  match protocol bgp
class-map match-any INTERACTIVE-VIDEO
  match dscp cs4 af41
class-map match-any CRITICAL-DATA
  match dscp cs3 af31
class-map match-any VOICE
  match dscp ef
class-map match-any SCAVENGER
  match dscp cs1 af11
class-map match-any NETWORK-CRITICAL
  match dscp cs2 cs6
!
!
policy-map MARK-BGP
  class BGP-ROUTING
    set dscp cs6
policy-map WAN
  class VOICE
    priority percent 10
  class INTERACTIVE-VIDEO
    priority percent 23
  class CRITICAL-DATA
    bandwidth percent 15
    random-detect dscp-based
  class DATA
    bandwidth percent 19
    random-detect dscp-based
  class SCAVENGER
    bandwidth percent 5
  class NETWORK-CRITICAL
    bandwidth percent 3
    service-policy MARK-BGP
  class class-default
    bandwidth percent 25

```

```

    random-detect
policy-map WAN-INTERFACE-G0/0
  class class-default
    shape average 25000000
    service-policy WAN
!
!
!
!
!
interface Loopback0
  ip address 10.255.251.208 255.255.255.255
  ip pim sparse-mode
!
interface Port-channel1
  description EtherChannel link to RS208-D3750X
  no ip address
  hold-queue 150 in
!
interface Port-channel1.50
  description R1 router link to distribution layer
  encapsulation dot1Q 50
  ip address 10.5.80.1 255.255.255.252
  ip pim sparse-mode
!
interface Port-channel1.99
  description Transit Net
  encapsulation dot1Q 99
  ip address 10.5.80.9 255.255.255.252
  ip pim sparse-mode
!
interface Embedded-Service-Engine0/0
  no ip address
  shutdown
!
interface GigabitEthernet0/0

```

```

bandwidth 25000
ip address 192.168.3.45 255.255.255.252
duplex auto
speed auto
no cdp enable
service-policy output WAN-INTERFACE-G0/0
!
interface GigabitEthernet0/1
description RS208-D3750X Gig1/0/12
no ip address
duplex auto
speed auto
channel-group 1
!
interface GigabitEthernet0/2
description RS208-D3750X Gig2/0/12
no ip address
duplex auto
speed auto
channel-group 1
!
interface Vlan1
no ip address
!
!
router eigrp 100
default-metric 25000 100 255 1 1500
network 10.5.0.0 0.0.255.255
network 10.255.0.0 0.0.255.255
redistribute bgp 65511
passive-interface default
no passive-interface Port-channel1.50
no passive-interface Port-channel1.99
eigrp router-id 10.255.251.208
!
router bgp 65511
bgp router-id 10.255.251.208

```

```

bgp log-neighbor-changes
network 10.5.81.0 mask 255.255.255.0
network 10.5.83.0 mask 255.255.255.0
network 10.255.251.208 mask 255.255.255.255
network 10.255.252.208 mask 255.255.255.255
network 192.168.3.44 mask 255.255.255.252
aggregate-address 10.5.80.0 255.255.248.0 summary-only
neighbor 10.5.80.10 remote-as 65511
neighbor 10.5.80.10 next-hop-self
neighbor 192.168.3.46 remote-as 65401
neighbor 192.168.3.46 route-map PREFER-MPLS-A in
neighbor 192.168.3.46 route-map NO-TRANSIT-AS out
!
ip forward-protocol nd
!
ip as-path access-list 1 permit _65401$
ip as-path access-list 10 permit ^$
ip pim autorp listener
ip pim register-source Loopback0
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!
ip tacacs source-interface Loopback0
!
logging 10.4.48.35
!
!
!
!
nls resp-timeout 1
cpd cr-id 1
route-map NO-TRANSIT-AS permit 10
match as-path 10
!
route-map PREFER-MPLS-A permit 10

```

```

match as-path 1
set local-preference 200
!
route-map PREFER-MPLS-A permit 20
!
!
snmp-server community cisco RO
snmp-server community cisco123 RW
snmp-server trap-source Loopback0
tacacs server TACACS-SERVER-1
address ipv4 10.4.48.15
key 7 0235015819031B0A4957
!
!
!
control-plane
!
!
!
mgcp profile default
!
!
!
!
!
gatekeeper
shutdown
!
!
!
line con 0
logging synchronous
line aux 0
line vty 0 4
transport preferred none
transport input all
line vty 5 15

```

```

transport preferred none
transport input all
!
scheduler allocate 20000 1000
ntp source Loopback0
ntp update-calendar
ntp server 10.4.48.17
!
end

```

RS208-2951-2

```

version 15.1
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname RS208-2951-2
!
boot-start-marker
boot-end-marker
!
!
enable secret 4 /DtCCr53Q4B18jsIm1UEqu7cNVZTOhxTZyUnZdsSrs
!
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
server name TACACS-SERVER-1
!
aaa authentication login default group TACACS-SERVERS local
aaa authentication login MODULE none
aaa authorization console
aaa authorization exec default group TACACS-SERVERS local
!
!
!

```

```

!
!
aaa session-id common
!
clock timezone PST -8 0
clock summer-time PDT recurring
!
no ipv6 cef
ip source-route
ip cef
!
!
!
ip multicast-routing
!
!
ip domain name cisco.local
!
multilink bundle-name authenticated
!
!
!
!
!
voice-card 0
!
!
!
!
!
!
!
license udi pid CISCO2951/K9 sn FHK1425F25D
hw-module pvdm 0/0
!
hw-module sm 2
!

```

```

!
!
!
username admin password 7 110A4816141D5A5E57
!
!
redundancy
!
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
class-map match-any DATA
    match dscp af21
class-map match-any BGP-ROUTING
    match protocol bgp
class-map match-any INTERACTIVE-VIDEO
    match dscp cs4 af41
class-map match-any CRITICAL-DATA
    match dscp cs3 af31
class-map match-any VOICE
    match dscp ef
class-map match-any SCAVENGER
    match dscp cs1 af11
class-map match-any NETWORK-CRITICAL
    match dscp cs2 cs6
!
!
policy-map MARK-BGP
    class BGP-ROUTING
        set dscp cs6
policy-map WAN
    class VOICE
        priority percent 10
    class INTERACTIVE-VIDEO
        priority percent 23
    class CRITICAL-DATA

```

```

bandwidth percent 15
random-detect dscp-based
class DATA
bandwidth percent 19
random-detect dscp-based
class SCAVENGER
bandwidth percent 5
class NETWORK-CRITICAL
bandwidth percent 3
service-policy MARK-BGP
class class-default
bandwidth percent 25
random-detect
policy-map WAN-INTERFACE-G0/0
class class-default
shape average 25000000
service-policy WAN
!
!
!
!
!
interface Loopback0
ip address 10.255.252.208 255.255.255.255
ip pim sparse-mode
!
interface Port-channel2
description EtherChannel link to RS208-D3750X
no ip address
hold-queue 150 in
!
interface Port-channel2.54
description R2 routed link to RS208-D3750X
encapsulation dot1Q 54
ip address 10.5.80.5 255.255.255.252
ip wccp 61 redirect in
ip pim sparse-mode

```

```

!
interface Port-channel2.99
description Transit net
encapsulation dot1Q 99
ip address 10.5.80.10 255.255.255.252
ip pim sparse-mode
!
interface GigabitEthernet0/0
bandwidth 25000
ip address 192.168.4.45 255.255.255.252
duplex auto
speed auto
no cdp enable
service-policy output WAN-INTERFACE-G0/0
!
interface GigabitEthernet0/1
description RS208-D3750X Gig1/0/11
no ip address
duplex auto
speed auto
channel-group 2
!
interface GigabitEthernet0/2
description RS208-D3750X Gig2/0/11
no ip address
duplex auto
speed auto
channel-group 2
!
interface Vlan1
no ip address
!
!
router eigrp 100
default-metric 25000 100 255 1 1500
network 10.5.0.0 0.0.255.255
network 10.255.0.0 0.0.255.255

```

```

redistribute bgp 65511
passive-interface default
no passive-interface Port-channel2.54
no passive-interface Port-channel2.99
eigrp router-id 10.255.252.208
!
router bgp 65511
  bgp router-id 10.255.252.208
  bgp log-neighbor-changes
  network 10.5.81.0 mask 255.255.255.0
  network 10.5.83.0 mask 255.255.255.0
  network 10.255.251.208 mask 255.255.255.255
  network 10.255.252.208 mask 255.255.255.255
  network 192.168.4.44 mask 255.255.255.252
  aggregate-address 10.5.80.0 255.255.248.0 summary-only
  neighbor 10.5.80.9 remote-as 65511
  neighbor 10.5.80.9 next-hop-self
  neighbor 192.168.4.46 remote-as 65402
  neighbor 192.168.4.46 route-map NO-TRANSIT-AS out
!
ip forward-protocol nd
!
ip as-path access-list 10 permit ^$
ip pim autorp listener
ip pim register-source Loopback0
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!
ip tacacs source-interface Loopback0
!
logging 10.4.48.35
!
!
!
!

```

```

nls resp-timeout 1
cpd cr-id 1
route-map NO-TRANSIT-AS permit 10
  match as-path 10
!
!
snmp-server community cisco RO
snmp-server community cisco123 RW
snmp-server trap-source Loopback0
tacacs server TACACS-SERVER-1
  address ipv4 10.4.48.15
  key 7 107D0C1A17120620091D
!
!
!
control-plane
!
!
!
mgcp profile default
!
!
!
!
!
gatekeeper
  shutdown
!
!
!
line con 0
  logging synchronous
line aux 0
line vty 0 4
  transport preferred none
  transport input ssh
line vty 5 15

```

```

transport preferred none
transport input ssh
!
scheduler allocate 20000 1000
ntp source Loopback0
ntp server 10.4.48.17
!
end

```

RS208-D3750X

```

version 15.0
no service pad
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname RS208-D3750X
!
boot-start-marker
boot-end-marker
!
!
logging buffered 1000000
enable secret 5 $1$MLI2$7NmyX6pKu3eEaqriKTAL7/
!
username admin password 7 0205554808095E731F
aaa new-model
!
!
aaa group server tacacs+ TACACS-SERVERS
 server name TACACS-SERVER-1
!
aaa authentication login default group tacacs+ local
aaa authorization console
aaa authorization exec default group tacacs+ local
!
!

```

```

!
!
!
aaa session-id common
clock timezone PST -8 0
clock summer-time PDT recurring
switch 1 provision ws-c3750x-12s
switch 2 provision ws-c3750x-12s
stack-mac persistent timer 0
system mtu routing 1500
ip routing
!
!
!
ip domain-name cisco.local
ip name-server 10.4.48.10
ip multicast-routing distributed
vtp mode transparent
udld enable

!
mls qos map policed-dscp 0 10 18 24 46 to 8
mls qos map cos-dscp 0 8 16 24 32 46 48 56
mls qos srr-queue input bandwidth 70 30
mls qos srr-queue input threshold 1 80 90
mls qos srr-queue input priority-queue 2 bandwidth 30
mls qos srr-queue input cos-map queue 1 threshold 2 3
mls qos srr-queue input cos-map queue 1 threshold 3 6 7
mls qos srr-queue input cos-map queue 2 threshold 1 4
mls qos srr-queue input dscp-map queue 1 threshold 2 24
mls qos srr-queue input dscp-map queue 1 threshold 3 48 49 50 51
52 53 54 55
mls qos srr-queue input dscp-map queue 1 threshold 3 56 57 58 59
60 61 62 63
mls qos srr-queue input dscp-map queue 2 threshold 3 32 33 40 41
42 43 44 45
mls qos srr-queue input dscp-map queue 2 threshold 3 46 47

```

```

mls qos srr-queue output cos-map queue 1 threshold 3 4 5
mls qos srr-queue output cos-map queue 2 threshold 1 2
mls qos srr-queue output cos-map queue 2 threshold 2 3
mls qos srr-queue output cos-map queue 2 threshold 3 6 7
mls qos srr-queue output cos-map queue 3 threshold 3 0
mls qos srr-queue output cos-map queue 4 threshold 3 1
mls qos srr-queue output dscp-map queue 1 threshold 3 32 33 40 41
42 43 44 45
mls qos srr-queue output dscp-map queue 1 threshold 3 46 47
mls qos srr-queue output dscp-map queue 2 threshold 1 16 17 18 19
20 21 22 23
mls qos srr-queue output dscp-map queue 2 threshold 1 26 27 28 29
30 31 34 35
mls qos srr-queue output dscp-map queue 2 threshold 1 36 37 38 39
mls qos srr-queue output dscp-map queue 2 threshold 2 24
mls qos srr-queue output dscp-map queue 2 threshold 3 48 49 50 51
52 53 54 55
mls qos srr-queue output dscp-map queue 2 threshold 3 56 57 58 59
60 61 62 63
mls qos srr-queue output dscp-map queue 3 threshold 3 0 1 2 3 4 5
6 7
mls qos srr-queue output dscp-map queue 4 threshold 1 8 9 11 13
15
mls qos srr-queue output dscp-map queue 4 threshold 2 10 12 14
mls qos queue-set output 1 threshold 1 100 100 50 200
mls qos queue-set output 1 threshold 2 125 125 100 400
mls qos queue-set output 1 threshold 3 100 100 100 3200
mls qos queue-set output 1 threshold 4 60 150 50 200
mls qos queue-set output 1 buffers 15 25 40 20
mls qos
!
!
!
!
spanning-tree mode rapid-pvst
spanning-tree portfast bpduguard default
spanning-tree extend system-id

```

```

spanning-tree vlan 1-4094 priority 24576
!
!
!
port-channel load-balance src-dst-ip
!
vlan internal allocation policy ascending
!
vlan 50
    name R1-link
!
vlan 54
    name R2-link
!
vlan 99
    name Transit-net
!
vlan 100
    name DataVLAN1
!
vlan 101
    name VoiceVLAN1
!
vlan 102
    name DataVLAN2
!
vlan 103
    name VoiceVLAN2
!
vlan 106
    name Management
!
vlan 999
    name NativeVLAN
!
ip ssh source-interface Loopback0
ip ssh version 2

```

```

!
!
!
!
macro name EgressQoS
 mls qos trust dscp
 queue-set 2
 srr-queue bandwidth share 1 30 35 5
 priority-queue out
@
!
!
interface Loopback0
 ip address 10.5.87.254 255.255.255.255
 ip pim sparse-mode
!
interface Port-channel1
 description EtherChannel link to RS200-2951-1
 switchport trunk encapsulation dot1q
 switchport trunk allowed vlan 50,99
 switchport mode trunk
 ip arp inspection trust
 spanning-tree portfast trunk
 ip dhcp snooping trust
!
interface Port-channel2
 description EtherChannel link to RS208-2951-2
 switchport trunk encapsulation dot1q
 switchport trunk allowed vlan 54,99
 switchport mode trunk
 ip arp inspection trust
 spanning-tree portfast trunk
 ip dhcp snooping trust
!
interface Port-channel10
 description EtherChannel to RS208-A2960S
 switchport trunk encapsulation dot1q

```

```

 switchport trunk native vlan 999
 switchport trunk allowed vlan 100,101,106
 switchport mode trunk
 logging event link-status
!
interface Port-channel11
 description EtherChannel link to RS208-A3560X-PR1
 switchport trunk encapsulation dot1q
 switchport trunk native vlan 999
 switchport trunk allowed vlan 102,103,106
 switchport mode trunk
 logging event link-status
!
interface Port-channel12
 description EtherChannel to RS208-A3750X-PR2
 switchport trunk encapsulation dot1q
 switchport trunk native vlan 999
 switchport trunk allowed vlan 102,103,106
 switchport mode trunk
 logging event link-status
!
interface FastEthernet0
 no ip address
 no ip route-cache
 shutdown
!
interface GigabitEthernet1/0/1
 description Link to RS208-A29060S Gig1/0/50
 switchport trunk encapsulation dot1q
 switchport trunk native vlan 999
 switchport trunk allowed vlan 100,101,106
 switchport mode trunk
 logging event link-status
 logging event trunk-status
 logging event bundle-status
 srr-queue bandwidth share 1 30 35 5
 queue-set 2

```

```

priority-queue out
mls qos trust dscp
macro description EgressQoS
channel-protocol lacp
channel-group 10 mode active
!
interface GigabitEthernet1/0/2
description Link to RS208-A3560X-PR1 Gig1/2
switchport trunk encapsulation dot1q
switchport trunk native vlan 999
switchport trunk allowed vlan 102,103,106
switchport mode trunk
logging event link-status
logging event trunk-status
logging event bundle-status
srr-queue bandwidth share 1 30 35 5
queue-set 2
priority-queue out
mls qos trust dscp
macro description EgressQoS
channel-protocol lacp
channel-group 11 mode active
!
interface GigabitEthernet1/0/3
description RS208-A3750X-PR2 Gig1/1/3
switchport trunk encapsulation dot1q
switchport trunk native vlan 999
switchport trunk allowed vlan 102,103,106
switchport mode trunk
logging event link-status
logging event trunk-status
logging event bundle-status
srr-queue bandwidth share 1 30 35 5
queue-set 2
priority-queue out
mls qos trust dscp
macro description EgressQoS

```

```

channel-protocol lacp
channel-group 12 mode active
!
interface GigabitEthernet1/0/11
description Link to RS208-2951-2 Gig0/1
switchport trunk encapsulation dot1q
switchport trunk allowed vlan 54,99
switchport mode trunk
ip arp inspection trust
logging event link-status
logging event trunk-status
logging event bundle-status
srr-queue bandwidth share 1 30 35 5
queue-set 2
priority-queue out
mls qos trust dscp
macro description EgressQoS
channel-group 2 mode on
ip dhcp snooping trust
!
interface GigabitEthernet1/0/12
description Link to RS208-2951-1 Gig0/1
switchport trunk encapsulation dot1q
switchport trunk allowed vlan 50,99
switchport mode trunk
ip arp inspection trust
logging event link-status
logging event trunk-status
logging event bundle-status
srr-queue bandwidth share 1 30 35 5
queue-set 2
priority-queue out
mls qos trust dscp
macro description EgressQoS
channel-group 1 mode on
ip dhcp snooping trust
!

```

```

interface GigabitEthernet2/0/1
  description Link to RS208-A2960S Gig1/0/49
  switchport trunk encapsulation dot1q
  switchport trunk native vlan 999
  switchport trunk allowed vlan 100,101,106
  switchport mode trunk
  logging event link-status
  logging event trunk-status
  logging event bundle-status
  srr-queue bandwidth share 1 30 35 5
  queue-set 2
  priority-queue out
  mls qos trust dscp
  macro description EgressQoS
  channel-protocol lacp
  channel-group 10 mode active
!
interface GigabitEthernet2/0/2
  description Link to RS208-A3560X-PR1 Gig1/1
  switchport trunk encapsulation dot1q
  switchport trunk native vlan 999
  switchport trunk allowed vlan 102,103,106
  switchport mode trunk
  logging event link-status
  logging event trunk-status
  logging event bundle-status
  srr-queue bandwidth share 1 30 35 5
  queue-set 2
  priority-queue out
  mls qos trust dscp
  macro description EgressQoS
  channel-protocol lacp
  channel-group 11 mode active
!
interface GigabitEthernet2/0/3
  description RS208-A3750X-PR2 Gig1/1/1
  switchport trunk encapsulation dot1q

```

```

  switchport trunk native vlan 999
  switchport trunk allowed vlan 102,103,106
  switchport mode trunk
  logging event link-status
  logging event trunk-status
  logging event bundle-status
  srr-queue bandwidth share 1 30 35 5
  queue-set 2
  priority-queue out
  mls qos trust dscp
  macro description EgressQoS
  channel-protocol lacp
  channel-group 12 mode active
!
interface GigabitEthernet2/0/11
  description Link to RS208-2951-2 Gig0/2
  switchport trunk encapsulation dot1q
  switchport trunk allowed vlan 54,99
  switchport mode trunk
  ip arp inspection trust
  logging event link-status
  logging event trunk-status
  logging event bundle-status
  srr-queue bandwidth share 1 30 35 5
  queue-set 2
  priority-queue out
  mls qos trust dscp
  macro description EgressQoS
  channel-group 2 mode on
  ip dhcp snooping trust
!
interface GigabitEthernet2/0/12
  description Link to RS208-2951-1 Gig0/2
  switchport trunk encapsulation dot1q
  switchport trunk allowed vlan 50,99
  switchport mode trunk
  ip arp inspection trust

```

```

logging event link-status
logging event trunk-status
logging event bundle-status
srr-queue bandwidth share 1 30 35 5
queue-set 2
priority-queue out
mls qos trust dscp
macro description EgressQoS
channel-group 1 mode on
ip dhcp snooping trust
!
interface Vlan1
no ip address
shutdown
!
interface Vlan50
ip address 10.5.80.2 255.255.255.252
ip pim sparse-mode
!
interface Vlan54
ip address 10.5.80.6 255.255.255.252
ip pim sparse-mode
!
interface Vlan100
ip address 10.5.81.1 255.255.255.0
ip helper-address 10.4.48.10
ip pim sparse-mode
!
interface Vlan101
ip address 10.5.82.1 255.255.255.0
ip helper-address 10.4.48.10
ip pim sparse-mode
!
interface Vlan102
ip address 10.5.83.1 255.255.255.0
ip helper-address 10.4.48.10
ip pim sparse-mode

```

```

!
interface Vlan103
ip address 10.5.84.1 255.255.255.0
ip helper-address 10.4.48.10
ip pim sparse-mode
!
interface Vlan106
description Management
ip address 10.5.87.1 255.255.255.128
ip pim sparse-mode
!
!
router eigrp 100
network 10.4.0.0 0.1.255.255
passive-interface default
no passive-interface Vlan50
no passive-interface Vlan54
nsf
!
!
no ip http server
ip http authentication aaa
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!
ip pim autorp listener
ip pim register-source Loopback0
ip tacacs source-interface Loopback0
!
logging esm config
logging 10.4.48.35
!
snmp-server community cisco RO
snmp-server community cisco123 RW
snmp-server trap-source Loopback0
tacacs server TACACS-SERVER-1
address ipv4 10.4.48.15

```


```
key 7 073C244F5C0C0D2E120B
!  
!  
!  
line con 0  
line vty 0 4  
    transport preferred none  
    transport input ssh  
line vty 5 15  
    transport preferred none  
    transport input ssh  
!  
ntp source Loopback0  
ntp server 10.4.48.17  
!  
end
```

Notes

WAN-Aggregation Devices—MPLS Static Design Model

This section includes configuration files corresponding to the MPLS Static design model as referenced in Figure 5.

Figure 5 - WAN-aggregation design—MPLS Static

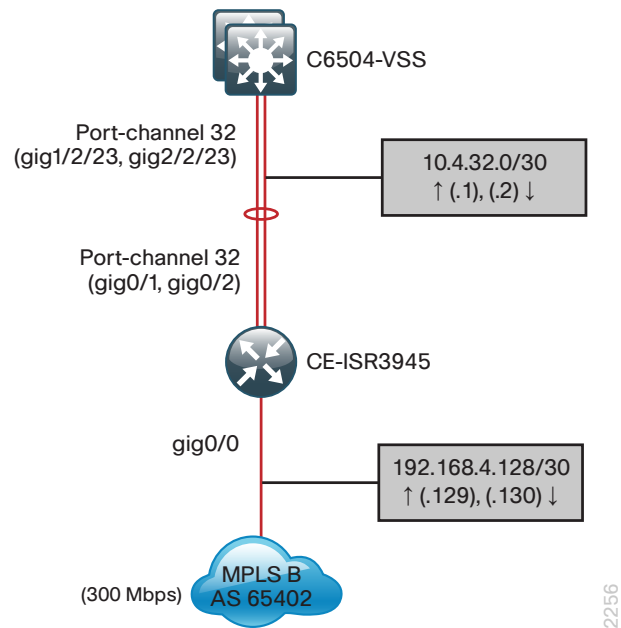

The following table provides the loopback addresses for the WAN aggregation devices in the MPLS Static design model.

Table 17 - Loopback addresses

Hostname	Loopback0
C6504-VSS	10.4.15.254/32
CE-ISR3945	10.4.32.254/32

The following table provides a summary of the various distribution layer switch device interconnections to other WAN-aggregation components.

Table 18 - MPLS Static design model—distribution layer switch port channel information

Port-channel	Member interfaces	Layer3/Layer2	Connected device
32	gig1/2/23 gig2/2/23	Layer 3	CE-ISR3945

C6504-VSS

```
version 15.0
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
service counters max age 5
!
hostname C6504-VSS
!
boot-start-marker
boot-end-marker
!
!
enable secret 5 $1$XzOF$hXiNWnTGyT3kN9zKNmGC6.
!
username admin password 7 04585A150C2E1D1C5A
aaa new-model
!
!
aaa authorization console
!
```

```

!
!
aaa session-id common
platform ip cef load-sharing ip-only
clock timezone PST -8
clock summer-time PDT recurring
!
!
ip domain-name cisco.local
ip name-server 10.10.48.10
ip multicast-routing
ipv6 multicast rpf use-bgp
vtp mode transparent
udld enable
!
switch virtual domain 100
    switch mode virtual
    mac-address use-virtual
!
!
table-map cos-discard-class-map
    map from 0 to 0
    map from 1 to 8
    map from 2 to 16
    map from 3 to 24
    map from 4 to 32
    map from 5 to 46
    map from 6 to 48
    map from 7 to 56
!
!
!
macro name EgressQoS_TenOrFortyGig
    service-policy type lan-queuing output 1P7Q4T
@
macro name EgressQoS
    service-policy type lan-queuing output 1P3Q8T

```

```

@
!
!
spanning-tree mode rapid-pvst
spanning-tree portfast edge bpduguard default
spanning-tree extend system-id
spanning-tree vlan 1-4094 priority 24576
!
!
!
!
!
!
diagnostic bootup level minimal
!
redundancy
    main-cpu
    auto-sync running-config
    mode sso
!
vlan internal allocation policy ascending
vlan access-log ratelimit 2000
!
vlan 1128
    name Guest_Wireless
!
ip ssh source-interface Loopback0
ip ssh version 2
!
class-map type lan-queuing match-any MULTIMEDIA-STREAMING-QUEUE
    match dscp af31 af32 af33
class-map match-any class-copp-icmp-redirect-unreachable
class-map match-all class-copp-glean
class-map type lan-queuing match-any CONTROL-MGMT-QUEUE
    match dscp cs7
    match dscp cs6
    match dscp cs3

```

```

match dscp cs2
match cos 3 6 7
class-map type lan-queuing match-any TRANSACTIONAL-DATA-QUEUE
match dscp af21 af22 af23
match cos 2
class-map match-all class-copp-receive
class-map type lan-queuing match-any PRIORITY-QUEUE-GIG
match cos 4 5
class-map match-all class-copp-options
class-map match-all class-copp-broadcast
class-map match-all class-copp-mcast-acl-bridged
class-map match-all class-copp-slb
class-map type lan-queuing match-any SCAVENGER-QUEUE
match dscp cs1
match cos 1
class-map match-all class-copp-mtu-fail
class-map match-all class-copp-ttl-fail
class-map match-all class-copp-arp-snooping
class-map match-any class-copp-mcast-copy
class-map match-any class-copp-ip-connected
class-map match-any class-copp-match-igmp
match access-group name acl-copp-match-igmp
class-map match-all class-copp-unknown-protocol
class-map match-any class-copp-vacl-log
class-map match-all class-copp-mcast-ipv6-control
class-map match-any class-copp-match-pimv6-data
match access-group name acl-copp-match-pimv6-data
class-map match-any class-copp-mcast-punt
class-map match-all class-copp-unsupp-rewrite
class-map match-all class-copp-ucast-egress-acl-bridged
class-map match-all class-copp-ip-admission
class-map type lan-queuing match-any MULTIMEDIA-CONFERENCING-
QUEUE
match dscp af41 af42 af43
match cos 4
class-map match-all class-copp-service-insertion
class-map type lan-queuing match-any BULK-DATA-QUEUE

```

```

match dscp af11 af12 af13
class-map match-all class-copp-mac-pbf
class-map match-any class-copp-match-mld
match access-group name acl-copp-match-mld
class-map type lan-queuing match-any BULK-DATA-SCAVENGER
match cos 1
class-map match-all class-copp-ucast-ingress-acl-bridged
class-map match-all class-copp-dhcp-snooping
class-map match-all class-copp-wccp
class-map match-all class-copp-nd
class-map match-any class-copp-ipv6-connected
class-map match-all class-copp-mcast-rpf-fail
class-map type lan-queuing match-any PRIORITY-QUEUE
match dscp ef
match dscp cs5
match dscp cs4
match cos 5
class-map match-any class-copp-ucast-rpf-fail
class-map match-all class-copp-mcast-ip-control
class-map match-any class-copp-match-pim-data
match access-group name acl-copp-match-pim-data
class-map match-any class-copp-match-ndv6
match access-group name acl-copp-match-ndv6
class-map type lan-queuing match-any CONTROL-AND-STREAM-MEDIA
match cos 2 3 6 7
class-map match-any class-copp-mcast-v4-data-on-routedPort
class-map match-any class-copp-mcast-v6-data-on-routedPort
!
!
policy-map type lan-queuing 1P7Q4T
class PRIORITY-QUEUE
priority
class CONTROL-MGMT-QUEUE
bandwidth remaining percent 14
queue-buffers ratio 10
random-detect dscp-based
random-detect dscp 16 percent 60 70

```

```

random-detect dscp 24 percent 70 80
random-detect dscp 48 percent 80 90
random-detect dscp 56 percent 90 100
class MULTIMEDIA-CONFERENCING-QUEUE
bandwidth remaining percent 14
queue-buffers ratio 10
random-detect dscp-based
random-detect dscp 34 percent 90 100
random-detect dscp 36 percent 80 90
random-detect dscp 38 percent 70 80
class MULTIMEDIA-STREAMING-QUEUE
bandwidth remaining percent 14
queue-buffers ratio 10
random-detect dscp-based
random-detect dscp 26 percent 90 100
random-detect dscp 28 percent 80 90
random-detect dscp 30 percent 70 80
class TRANSACTIONAL-DATA-QUEUE
bandwidth remaining percent 14
queue-buffers ratio 10
random-detect dscp-based
random-detect dscp 18 percent 90 100
random-detect dscp 20 percent 80 90
random-detect dscp 22 percent 70 80
class BULK-DATA-QUEUE
bandwidth remaining percent 6
queue-buffers ratio 10
random-detect dscp-based
random-detect dscp 10 percent 90 100
random-detect dscp 12 percent 80 90
random-detect dscp 14 percent 70 80
class SCAVENGER-QUEUE
bandwidth remaining percent 2
queue-buffers ratio 10
random-detect dscp-based
random-detect dscp 8 percent 80 100
class class-default

```

```

queue-buffers ratio 25
random-detect dscp-based aggregate
random-detect dscp values 0 1 2 3 4 5 6 7 percent 80 100
random-detect dscp values 9 11 13 15 17 19 21 23 percent 80
100
random-detect dscp values 25 27 29 31 33 35 37 39 percent 80
100
random-detect dscp values 41 42 43 44 45 47 49 50 percent 80
100
random-detect dscp values 51 52 53 54 55 57 58 59 percent 80
100
random-detect dscp values 60 61 62 63 percent 80 100
policy-map policy-default-autocopp
class class-copp-mcast-v4-data-on-routedPort
police rate 10 pps burst 1 packets conform-action drop
exceed-action drop
class class-copp-mcast-v6-data-on-routedPort
police rate 10 pps burst 1 packets conform-action drop
exceed-action drop
class class-copp-icmp-redirect-unreachable
police rate 100 pps burst 10 packets conform-action
transmit exceed-action drop
class class-copp-ucast-rpf-fail
police rate 100 pps burst 10 packets conform-action
transmit exceed-action drop
class class-copp-vacl-log
police rate 2000 pps burst 1 packets conform-action
transmit exceed-action drop
class class-copp-mcast-punt
police rate 1000 pps burst 256 packets conform-action
transmit exceed-action drop
class class-copp-mcast-copy
police rate 1000 pps burst 256 packets conform-action
transmit exceed-action drop
class class-copp-ip-connected
police rate 1000 pps burst 256 packets conform-action
transmit exceed-action drop

```

```

class class-copp-ipv6-connected
  police rate 1000 pps burst 256 packets conform-action
transmit exceed-action drop
class class-copp-match-pim-data
  police rate 1000 pps burst 1000 packets conform-action
transmit exceed-action drop
class class-copp-match-pimv6-data
  police rate 1000 pps burst 1000 packets conform-action
transmit exceed-action drop
class class-copp-match-mld
  police rate 10000 pps burst 10000 packets conform-action
set-discard-class-transmit 48 exceed-action transmit
class class-copp-match-igmp
  police rate 10000 pps burst 10000 packets conform-action
set-discard-class-transmit 48 exceed-action transmit
class class-copp-match-ndv6
  police rate 1000 pps burst 1000 packets conform-action set-
discard-class-transmit 48 exceed-action drop
policy-map type lan-queuing 1P3Q8T
class PRIORITY-QUEUE-GIG
  priority
  queue-buffers ratio 15
class CONTROL-AND-STREAM-MEDIA
  bandwidth remaining percent 55
  queue-buffers ratio 40
  random-detect cos-based
  random-detect cos 2 percent 60 70
  random-detect cos 3 percent 70 80
  random-detect cos 6 percent 80 90
  random-detect cos 7 percent 90 100
class BULK-DATA-SCAVENGER
  bandwidth remaining percent 10
  queue-buffers ratio 20
  random-detect cos-based
  random-detect cos 1 percent 80 100
class class-default
  queue-buffers ratio 25

```

```

random-detect cos-based
random-detect cos 0 percent 80 100
!
!
auto qos default
!
!
interface Loopback0
  ip address 10.4.15.254 255.255.255.255
  ip pim sparse-mode
!
interface Loopback1
  ip address 10.4.15.252 255.255.255.255
  ip pim sparse-mode
!
interface Port-channel32
  description CE-ISR3945
  no switchport
  ip address 10.4.32.1 255.255.255.252
  ip pim sparse-mode
  logging event link-status
  carrier-delay msec 0
!
interface Port-channel101
  no switchport
  no ip address
  no platform qos channel-consistency
  switch virtual link 1
!
interface Port-channel102
  no switchport
  no ip address
  no platform qos channel-consistency
  switch virtual link 2
!
interface TenGigabitEthernet1/1/4

```

```

no switchport
no ip address
no cdp enable
channel-group 101 mode on
!
interface TenGigabitEthernet1/1/5
no switchport
no ip address
no cdp enable
channel-group 101 mode on
!
interface GigabitEthernet1/2/23
description CE-ISR3945 Gig0/2
no switchport
no ip address
logging event link-status
logging event trunk-status
logging event bundle-status
carrier-delay msec 0
macro description EgressQoS
channel-group 32 mode on
service-policy type lan-queuing output 1P3Q8T
!
interface GigabitEthernet2/2/23
description CE-ISR3945 Gig0/1
no switchport
no ip address
logging event link-status
logging event trunk-status
logging event bundle-status
carrier-delay msec 0
macro description EgressQoS
channel-group 32 mode on
service-policy type lan-queuing output 1P3Q8T
!
interface Vlan1
no ip address

```

```

shutdown
!
!
router eigrp 100
network 10.4.0.0 0.1.255.255
passive-interface default
no passive-interface Port-channel32
eigrp router-id 10.4.15.254
nsf
!
ip forward-protocol nd
!
no ip http server
ip http authentication aaa
ip http secure-server
ip pim autorp listener
ip pim register-source Loopback0
ip tacacs source-interface Loopback0
!
!
ip access-list extended acl-copp-match-igmp
permit igmp any any
ip access-list extended acl-copp-match-pim-data
deny pim any host 224.0.0.13
permit pim any any
!
access-list 10 permit 239.1.0.0 0.0.255.255
!
snmp-server community cisco RO
snmp-server community cisco123 RW
snmp-server trap-source Loopback0
tacacs-server host 10.4.48.15 key 7 13361211190910012E3D
no tacacs-server directed-request
!
!
ipv6 access-list acl-copp-match-mld
permit icmp any any mld-report

```

```

permit icmp any any mld-query
permit icmp any any mld-reduction
permit icmp any any 143
!
ipv6 access-list acl-copp-match-ndv6
permit icmp any any nd-na
permit icmp any any nd-ns
permit icmp any any router-advertisement
permit icmp any any router-solicitation
permit icmp any any redirect
!
ipv6 access-list acl-copp-match-pimv6-data
deny 103 any host FF02::D
permit 103 any any
!
control-plane
service-policy input policy-default-autocopp
!
!
line con 0
exec-timeout 0 0
line aux 0
line vty 0 4
transport preferred none
transport input ssh
line vty 5 15
transport preferred none
transport input ssh
!
ntp clock-period 17180035
ntp source Loopback0
ntp update-calendar
ntp server 10.4.48.17
!
!
module provision switch 1

```

```

slot 1 slot-type 318 port-type 31 number 3 port-type 60 number 2
virtual-slot 17
slot 2 slot-type 156 port-type 31 number 24 virtual-slot 18
slot 4 slot-type 284 port-type 60 number 16 virtual-slot 20
!
module provision switch 2
slot 1 slot-type 318 port-type 31 number 3 port-type 60 number 2
virtual-slot 33
slot 2 slot-type 156 port-type 31 number 24 virtual-slot 34
slot 4 slot-type 284 port-type 60 number 16 virtual-slot 36

!

end

```

CE-ISR3945

```

version 15.1
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname CE-ISR3945
!
boot-start-marker
boot-end-marker
!
enable secret 5 $1$65Nt$Q8DJB/6aNGP5lgp06CCKA.
!
aaa new-model
!
!
!
!
!
!
!
!
!
!

```

```

aaa session-id common
!
!
!
clock timezone PST -8
clock summer-time PDT recurring
!
!
no ipv6 cef
ip source-route
ip cef
!
!
ip multicast-routing
!
!
ip domain name cisco.local
!
multilink bundle-name authenticated
!
!
!
!
!
voice-card 0
!
!
!
!
!
!
license udi pid C3900-SPE150/K9 sn FOC133037KH
!
!
!
username admin password 7 04585A150C2E1D1C5A
!

```

```

redundancy
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
class-map match-any DATA
    match dscp af21
class-map match-any INTERACTIVE-VIDEO
    match dscp cs4 af41
class-map match-any CRITICAL-DATA
    match dscp cs3 af31
class-map match-any VOICE
    match dscp ef
class-map match-any SCAVENGER
    match dscp cs1 af11
class-map match-any NETWORK-CRITICAL
    match dscp cs2 cs6
!
!
policy-map WAN
    class VOICE
        priority percent 10
    class INTERACTIVE-VIDEO
        priority percent 23
    class CRITICAL-DATA
        bandwidth percent 15
        random-detect dscp-based
    class DATA
        bandwidth percent 19
        random-detect dscp-based
    class SCAVENGER
        bandwidth percent 5
    class NETWORK-CRITICAL
        bandwidth percent 3
    class class-default
        bandwidth percent 25

```

```

    random-detect
policy-map WAN-INTERFACE-G0/0
  class class-default
    shape average 300000000
    service-policy WAN
!
!
!
!
!
interface Loopback0
  ip address 10.4.32.254 255.255.255.255
  ip pim sparse-mode
!
!
interface Port-channel32
  ip address 10.4.32.2 255.255.255.252
  ip pim sparse-mode
  hold-queue 150 in
!
interface GigabitEthernet0/0
  bandwidth 300000
  ip address 192.168.4.129 255.255.255.252
  duplex auto
  speed auto
  no cdp enable
  service-policy output WAN-INTERFACE-G0/0
!
!
interface GigabitEthernet0/1
  description C6504-VSS Gig2/2/23
  no ip address
  duplex auto
  speed auto
  channel-group 32
!
!
```

```

interface GigabitEthernet0/2
  description C6504-VSS Gig1/2/23
  no ip address
  duplex auto
  speed auto
  channel-group 32
!
!
interface FastEthernet0/0/0
  no ip address
  shutdown
  duplex auto
  speed auto
!
!
interface FastEthernet0/0/1
  no ip address
  shutdown
  duplex auto
  speed auto
!
!
!
router eigrp 100
  default-metric 300000 300 255 1 1500
  network 10.4.0.0 0.1.255.255
  redistribute static
  passive-interface default
  no passive-interface Port-channel32
  eigrp router-id 10.4.32.254
!
!
ip forward-protocol nd
!
ip pim autorp listener
ip pim register-source Loopback0
```

```

no ip http server
ip http secure-server
!
ip route 10.5.0.0 255.255.0.0 192.168.4.130
ip route 10.255.252.101 255.255.255.255 192.168.4.130
ip route 10.255.252.103 255.255.255.255 192.168.4.130
ip route 192.168.4.128 255.255.255.224 192.168.4.130
!
!
!
!
!
nls resp-timeout 1
cpd cr-id 1
!
!
snmp-server community cisco RO
snmp-server community cisco123 RW
snmp-server trap-source Loopback0
!
control-plane
!
!
!
!
!
!
!
!
!
gatekeeper
shutdown
!
!
line con 0
logging synchronous
line aux 0

```

```


line vty 0 4
transport preferred none
transport input ssh
line vty 5 15
transport preferred none
transport input ssh
!
scheduler allocate 20000 1000
ntp source Loopback0
ntp update-calendar
ntp server 10.4.48.17
end

```

WAN Remote-Site Devices—MPLS Static Design Model

This section includes configuration files corresponding to the MPLS static design model as referenced in Figure 6. Each remote-site type has its respective devices grouped together along with any other relevant configuration information. The Autonomous System Number (ASN) used in Cisco SBA configurations is 65511.

Figure 6 - WAN remote-site designs—MPLS Static

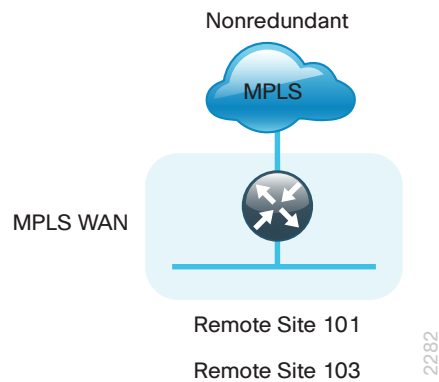

Notes

The following table lists the specific details for the MPLS WAN and DMVPN WAN connections at each site.

Table 19 - Remote-site MPLS and DMVPN WAN connection details

Location	Net block	MPLS CE	MPLS PE	Carrier AS	LAN interfaces	Loopbacks
Remote Site 101 (Single-router, single-link with local DHCP)	10.5.8.0/21	(gig0/0) 192.168.4.137	192.168.4.138	Statically routed (B)	(gig0/2)	10.255.252.101 (router)
Remote Site 103 (800 Series single- router, single-link with local DHCP)	10.5.24.0/21	(gig0/0) 192.168.4.145	192.168.4.146	Statically routed (B)	(fa0)	10.255.252.103 (router)

The following table lists the policed-rate link speeds for the remote-site QoS traffic shaping policies.

Table 20 - Remote-site link speeds

Location	Net block	MPLS link speed
Remote Site 101	10.5.8.0/21	10 Mbps
Remote Site 103	10.5.24.0/21	2 Mbps

Remote Site 101: Single-Router, Single-Link with Local DHCP (MPLS-B Static)

Table 21 - Remote Site 101—IP address information

Location	Net block	Data wired subnet	Voice wired subnet	Loopbacks and switches
Remote Site 101	10.5.8.0/21	10.5.12.0/24 (VLAN 64)	10.5.13.0/24 (VLAN 69)	10.255.252.101 (router) 10.5.12.5 (access switch)

RS101-2921

```
version 15.1
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname RS101-2921
!
boot-start-marker
boot-end-marker
!
!
!
enable secret 4 /DtCCr53Q4B18jSIm1UEqu7cNVZTOhxTZyUnZdsSrs
!
aaa new-model
!
!
!
!
!
!
aaa session-id common
!
clock timezone PST -8 0
clock summer-time PDT recurring
!
no ipv6 cef
ip source-route
ip cef
!
!
!
!
ip multicast-routing
ip dhcp excluded-address 10.5.12.1 10.5.12.19
```

```
ip dhcp excluded-address 10.5.13.1 10.5.13.19
!
ip dhcp pool DHCP-Wired-Data
network 10.5.12.0 255.255.255.0
default-router 10.5.12.1
domain-name cisco.local
dns-server 10.4.48.10
!
ip dhcp pool DHCP-Wired-Voice
network 10.5.13.0 255.255.255.0
default-router 10.5.13.1
domain-name cisco.local
dns-server 10.4.48.10
!
!
!
ip domain name cisco.local
!
multilink bundle-name authenticated
!
!
!
!
!
!
voice-card 0
!
!
!
!
!
!
!
license udi pid CISC02921/K9 sn FTX1419ALZK
hw-module pvdm 0/0
!
!
!
```

```

username admin password 7 070C705F4D06485744
!
redundancy
!
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
!
!
!
interface Loopback0
 ip address 10.255.252.101 255.255.255.255
 ip pim sparse-mode
!
interface GigabitEthernet0/0
 bandwidth 10000
 ip address 192.168.4.137 255.255.255.252
 duplex auto
 speed auto
 no cdp enable
!
interface GigabitEthernet0/1
 no ip address
 duplex auto
 speed auto
!
interface GigabitEthernet0/2
 description RS101-A3560X Gig0/24
 no ip address
 duplex auto
 speed auto
!
interface GigabitEthernet0/2.64

```

```

 description Wired Data
 encapsulation dot1Q 64
 ip address 10.5.12.1 255.255.255.0
 ip pim sparse-mode
!
interface GigabitEthernet0/2.69
 description Wired Voice
 encapsulation dot1Q 69
 ip address 10.5.13.1 255.255.255.0
 ip pim sparse-mode
!
!
!
!
ip forward-protocol nd
!
ip pim autorp listener
ip pim register-source Loopback0
no ip http server
ip http secure-server
!
ip route 0.0.0.0 0.0.0.0 192.168.4.138
!
!
!
!
snmp-server community cisco RO
snmp-server community cisco123 RW
snmp-server trap-source Loopback0
!
!
!
!
control-plane
!
!
!
!

```

```
mgcp profile default
!
!
!
!
!
gatekeeper
 shutdown
!
!
!
line con 0
 logging synchronous
line aux 0
line vty 0 4
 transport preferred none
 transport input ssh
line vty 5 15
 transport preferred none
 transport input ssh
!
scheduler allocate 20000 1000
ntp source Loopback0
ntp update-calendar
ntp server 10.4.48.17
end
```

Remote Site 103: 800 Series Single-Router, Single-Link with Local DHCP (MPLS-B Static)

Table 22 - Remote Site 103 IP address information

Location	Net block	Data wired subnet	Voice wired subnet	Loopbacks and switches
Remote Site 103	10.5.24.0/21	10.5.28.0/24 (VLAN 64)	10.5.29.0/24 (VLAN 69)	10.255.252.103 (router) 10.5.28.5 (access switch)

RS103-881

```
version 15.1
no service pad
service timestamps debug datetime msec localtime
service timestamps log datetime msec localtime
service password-encryption
!
hostname RS103-881
!
boot-start-marker
boot-end-marker
!
!
enable secret 4 /DtCCr53Q4B18jSIm1UEqu7cNVZT0hxTZyUnZdsSrs
!
aaa new-model
!
!
!
!
!
!
!
aaa session-id common
!
```

```

clock timezone PST -8 0
clock summer-time PDT recurring
!
ip source-route
!
!
!
ip dhcp excluded-address 10.5.28.1 10.5.28.19
ip dhcp excluded-address 10.5.29.1 10.5.29.19
!
ip dhcp pool DHCP-Wired-Data
 network 10.5.28.0 255.255.255.0
 default-router 10.5.28.1
 domain-name cisco.local
 dns-server 10.4.48.10
!
ip dhcp pool DHCP-Wired-Voice
 network 10.5.29.0 255.255.255.0
 default-router 10.5.29.1
 domain-name cisco.local
 dns-server 10.4.48.10
!
!
ip cef
ip domain name cisco.local
ip multicast-routing
no ipv6 cef
!
!
!
!
!
multilink bundle-name authenticated
!
!
!
!

```

```

!
!
!
voice-card 0
!
license udi pid C881SRSTW-GN-A-K9 sn FTX1542006X
!
!
dot1x system-auth-control
!
spanning-tree portfast bpduguard
spanning-tree vlan 64 priority 8192
spanning-tree vlan 69 priority 8192
username admin password 7 0007421507545A545C
!
!
!
!
ip ssh source-interface Loopback0
ip ssh version 2
!
class-map match-any DATA
 match dscp af21
class-map match-any INTERACTIVE-VIDEO
 match dscp cs4 af41
class-map match-any CRITICAL-DATA
 match dscp cs3 af31
class-map match-any VOICE
 match dscp ef
class-map match-any SCAVENGER
 match dscp cs1 af11
class-map match-any NETWORK-CRITICAL
 match dscp cs2 cs6
!
!
policy-map WAN
 class VOICE

```

```

    priority percent 10
class INTERACTIVE-VIDEO
    priority percent 23
class CRITICAL-DATA
    bandwidth percent 15
    random-detect dscp-based
class DATA
    bandwidth percent 19
    random-detect dscp-based
class SCAVENGER
    bandwidth percent 5
class NETWORK-CRITICAL
    bandwidth percent 3
class class-default
    bandwidth percent 25
    random-detect
policy-map WAN-INTERFACE-F4
    class class-default
        shape average 2000000
        service-policy WAN
!
!
!
!
!
!
!
!
interface Loopback0
    ip address 10.255.252.103 255.255.255.255
    ip pim sparse-mode
!
interface FastEthernet0
    switchport trunk native vlan 999
    switchport trunk allowed vlan 1,2,64,69,1002-1005
    switchport mode trunk

```

```

    no ip address
!
interface FastEthernet1
    no ip address
!
interface FastEthernet2
    no ip address
!
interface FastEthernet3
    no ip address
!
interface FastEthernet4
    description MPLS WAN Uplink
    bandwidth 2000
    ip address 192.168.4.145 255.255.255.252
    duplex auto
    speed auto
    no cdp enable
    service-policy output WAN-INTERFACE-F4
!
interface Vlan1
    no ip address
!
interface Vlan64
    description Wired Data
    ip address 10.5.28.1 255.255.255.0
    ip pim sparse-mode
!
interface Vlan69
    description Wired Voice
    ip address 10.5.29.1 255.255.255.0
    ip pim sparse-mode
!
ip forward-protocol nd
no ip http server
ip http secure-server
!

```

```
!  
ip pim autorp listener  
ip pim register-source Loopback0  
ip route 0.0.0.0 0.0.0.0 192.168.4.146  
!  
!  
!  
!  
!  
!  
snmp-server community cisco RO  
snmp-server community cisco123 RW  
snmp-server trap-source Loopback0  
!  
!  
!  
control-plane  
!  
!  
!  
!  
mgcp profile default  
!  
!  
!  
!  
line con 0  
  logging synchronous  
line aux 0  
line vty 0 4  
  length 0  
  transport preferred none  
  transport input ssh  
!  
ntp source Loopback0  
ntp server 10.4.48.17  
end
```

Notes

Feedback

Please use the [feedback form](#) to send comments and suggestions about this guide.



SMART BUSINESS ARCHITECTURE



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

ALL DESIGNS, SPECIFICATIONS, STATEMENTS, INFORMATION, AND RECOMMENDATIONS (COLLECTIVELY, "DESIGNS") IN THIS MANUAL ARE PRESENTED "AS IS," WITH ALL FAULTS. CISCO AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE. IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THE DESIGNS, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE DESIGNS ARE SUBJECT TO CHANGE WITHOUT NOTICE. USERS ARE SOLELY RESPONSIBLE FOR THEIR APPLICATION OF THE DESIGNS. THE DESIGNS DO NOT CONSTITUTE THE TECHNICAL OR OTHER PROFESSIONAL ADVICE OF CISCO, ITS SUPPLIERS OR PARTNERS. USERS SHOULD CONSULT THEIR OWN TECHNICAL ADVISORS BEFORE IMPLEMENTING THE DESIGNS. RESULTS MAY VARY DEPENDING ON FACTORS NOT TESTED BY CISCO.

Any Internet Protocol (IP) addresses used in this document are not intended to be actual addresses. Any examples, command display output, and figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses in illustrative content is unintentional and coincidental.

© 2013 Cisco Systems, Inc. All rights reserved.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)