



# System Release 2.5/3.5 Service Pack 1

## Release Notes and Installation Instructions



# Please Read

## Important

Please read this entire guide. If this guide provides installation or operation instructions, give particular attention to all safety statements included in this guide.

# Notices

## Trademark Acknowledgements

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks).

DOCSIS is a registered trademark of Cable Television Laboratories, Inc.

Other third party trademarks mentioned are the property of their respective owners.

The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1009R)

## Publication Disclaimer

Cisco Systems, Inc. assumes no responsibility for errors or omissions that may appear in this publication. We reserve the right to change this publication at any time without notice. This document is not to be construed as conferring by implication, estoppel, or otherwise any license or right under any copyright or patent, whether or not the use of any information in this document employs an invention claimed in any existing or later issued patent.

## Copyright

© 2006, 2012 Cisco and/or its affiliates. All rights reserved. Printed in the United States of America.

Information in this publication is subject to change without notice. No part of this publication may be reproduced or transmitted in any form, by photocopy, microfilm, xerography, or any other means, or incorporated into any information retrieval system, electronic or mechanical, for any purpose, without the express permission of Cisco Systems, Inc.

# Contents

## About This Guide

vii

## Introducing System Release 2.5/3.5 Service Pack 1 1

What CRs Are Included in This Service Pack? .....	2
What Are the Site Requirements? .....	5
What Are the Known Issues? .....	8

## DNCS Pre-Upgrade Procedures 9

Before You Begin.....	11
When to Complete These Procedures .....	12
Plan Which Optional Features Will Be Supported .....	13
Verify the Integrity of the CDs.....	15
Back Up the Current Modulator Configuration Files .....	16
Run the Doctor Report .....	17
Examine Mirrored Devices .....	18
Verify DBDS Stability .....	19
Check the EAS Configuration – Pre-Upgrade .....	21
Obtain System Configuration .....	22
Check and Remove Sessions .....	23
Back Up the DNCS Filesystem and Application Server .....	24
Back Up the Informix Database .....	25
Suspend Billing and Third-Party Interfaces .....	26
Stop the dhctStatus and signonCount Utilities.....	27
Back Up and Delete the copyControlParams File .....	29
Stop System Components .....	30
Stop the cron Jobs.....	33
Detach Disk Mirroring on the DNCS .....	35
Ensure No Active Database Sessions on the DNCS.....	36
Remove the NMI Software .....	38

## System Release 2.5/3.5 SP1 Installation Procedures 39

Install the DNCS Software.....	40
Install the Service Pack.....	43
Install Additional Software .....	44
Check the Installed Software Version .....	45
Add an EAS Variable to the .profile File .....	47
Enable Optional and Licensed Features .....	48
Remove Scripts That Bounce the Pass-Through Process.....	49

Reboot the DNCS .....	51
Disable the SAM Process on Aptiv Systems .....	52
Restart the System Components .....	53
Restart the Application Server at Aptiv Sites .....	56
Restart the Billing and Third-Party Interfaces .....	57

## **Post-Upgrade Procedures 59**

Configure SAM Timers .....	60
Configure the CableCARD Server .....	61
Check the EAS Configuration – Post Upgrade .....	63
Check BFS QAM Sessions .....	64
Authorize the BRF as a BFS Server (Optional) .....	67
Final System Validation Tests .....	70
Reset the Modulators .....	72
Reinstall the NMI Software .....	73
Re-Enable the Disk Mirroring Function .....	74

## **Customer Information 77**

## **Appendix A System Release Rollback Procedures 79**

Roll Back the Enterprise 450 or Sun Fire V880 DNCS .....	80
Roll Back the Enterprise 250 DNCS .....	83

## **Appendix B How to Determine the Tape Drive Device Name 85**

Determine the Tape Drive Device Name .....	86
--	----

## **Appendix C Direct ASI Installation and Configuration Procedures 89**

Check for the Existence of the ASI Package .....	91
Enable the ASI Feature .....	92
Stop the System Components .....	93
Install the ASI Card .....	96
Install the ASI Package .....	98
Configure the ASI Card .....	99
Check the Status of the ASI Card .....	100
Restart System Components .....	101
Record Configuration Data .....	105
Create an MPEG Source .....	108
Set Up the QAM .....	111
Set Up the BFS Host .....	114
Set the BIG Offline .....	117
Stop the BFS and OSM Processes .....	118

Tear Down BFS Sessions .....	121
Clear Completed, Pending, or Failed Sessions .....	122
Enable the System for ASI .....	123
Restart the BFS and OSM Processes .....	125
Checkout Procedures for the ASI Card.....	127

## Appendix D Direct ASI Rollback Procedures 129

Record TSID Values for BFS MPEG Source and BFS QAM.....	130
Record Configuration Data .....	133
Set the BIG Online.....	134
Reconfigure the QAM .....	135
Reconnect the BIG.....	137
Configure the Front Panel of the BFS QAM.....	138
Configure Inband Data .....	139
Set Up DNCS Host.....	140
Stop the BFS, OSM, and siManager Processes .....	141
Tear Down BFS Sessions .....	142
Clear Completed, Pending, or Failed Sessions .....	143
Stop the BFS QAM .....	144
Restart the BFS, OSM, and siManager Processes .....	145
Restart the BFS QAM.....	146





# About This Guide

## Introduction

This guide provides step-by-step instructions for upgrading a Cisco Digital Broadband Delivery System (DBDS) to System Release 2.5/3.5 Service Pack 1 (SR 2.5/3.5 SP1). Sites that use this guide to upgrade must currently support SR 2.5/3.5.

The software installed using this guide is provided in the form of CDs. This is *not* a UniPack upgrade guide.

## Audience

This guide provides Cisco field service engineers and system operators with instructions to install this service pack.

## Read Me

Please read this entire guide before beginning the upgrade. If you are uncomfortable with any of the procedures, contact Cisco Services for assistance.

**Important:** Complete all of the procedures in this guide in the order in which they are presented. Failure to follow all of the instructions may lead to undesirable results.

## Required Skills and Expertise

System operators or engineers who upgrade the DBDS system to System Release 2.5/3.5 SP1 need the following skills:

- Advanced knowledge of UNIX
  - Experience with the UNIX vi editor. Several times throughout the system upgrade process, system files are edited using the UNIX vi editor. The UNIX vi editor is not intuitive. The instructions provided in this guide are no substitute for an advanced working knowledge of vi
  - The ability to review and edit cron files
- Extensive DBDS system expertise
  - The ability to identify files that are unique to the site being upgraded
  - The ability to add and remove user accounts

## Software Product Offering

Cisco currently offers several types of software products that enable the cable service provider to better manage their Digital Broadband Delivery System (DBDS) networks:

- Application Platform Releases (Client Releases) offer a bundled software package that includes both the SARA and PowerTV OS. Application Platform Releases are compatible with multiple system releases.
  - Application Maintenance Releases address a group of specific change requests that are required before the next application release is available.
- System Releases are software releases that are designed to improve or enhance the functionality of the Digital Network Control System (DNCS). A system release can be categorized as one of the following product types:
  - Major Releases and Minor Releases introduce new DBDS functionality while fixing known issues in the network.
  - Service Packs are executable files that are an accumulation of fixed change requests since the last major or minor release. After a service pack is issued for a specific major or minor release, each subsequent service pack includes all previously fixed change requests.
  - Patch Releases are a single, executable file that address an urgent customer issue before the next system release.
  - Maintenance Releases incorporate patch releases and service packs into one software release.
- Headend Software Releases are software releases designed specifically for headend components to enhance hardware functionality.
- Application Software provides cable service providers with unique services and increased functionality that enhance the subscriber experience.

## Related Publications

You may find the following publications useful as resources when you implement the procedures in this document. Check the copyright date on your resources to assure that you have the most current version. The publish dates for the following documents are valid as of this printing. However, some of these documents may have since been revised:

- *DBDS Utilities Version 5.1 Installation Instructions and DNCS Utilities User's Guide* (part number 740020, published June 2006)
- *Recommendations for Setting System Information to Out-of-Band* (part number 738143, published April 2006)

- *DBDS Backup and Restore Procedures for SR 2.2/3.2, SR 2.5/3.5, SR 2.6/3.6, SR 3.3, CV SR 3.4, and SR 4.0* (part number 4011040, published September 2005)
- *Program and System Information Protocol Configuration for System Releases 2.5, 3.5, and 4.0* (part number 4011319, published September 2005)
- *RNCS Installation and Upgrade Instructions* (part number 4003191, published September 2005)
- *DBDS Alarm Manager 1.0 Installation Instructions* (part number 745262, published June 2005)
- *Recommendations for Data Carousel Rate Management Technical Bulletin* (part number 716377, published June 2005)
- *DHCT Status Reporting and signonCount Utilities User's Guide* (part number 738186, published November 2004)
- *CoolTools Utilities User's Guide* (part number 749640, published October 2004 [revision expected date: late 2006])
- *Configuring and Troubleshooting the Digital Emergency Alert System, For Use With All System Releases* (part number 4004455, published January 2004)
- *Configuring Variable Length Subnet Masks in System Release 2.1 or 3.0 Upgrades Technical Bulletin* (part number 4000375, published November 2002)

## Document Version

This is the third release of this guide that includes minor text changes.



# 1

## Introducing System Release 2.5/3.5 Service Pack 1

### Introduction

This chapter lists major improvements and beneficial operational changes for the DNCS as a result of installing an updated service pack to the existing system release. In addition, this chapter provides important system information about this service pack.

### Upgrade Path

Sites that want to upgrade to this service pack must support DNCS 4.0.0.27 prior to upgrading to this service pack. This guide provides instructions for upgrading to DNCS 4.0.0.27 and then to SR 2.5/3.5 SP1.

### Time to Complete the Upgrade

The upgrade to SR 2.5/3.5 SP1 must be completed from within a maintenance window. Cisco engineers have determined that a typical site can be upgraded in about 6 hours.

### In This Chapter

- What CRs Are Included in This Service Pack? ..... 2
- What Are the Site Requirements? ..... 5
- What Are the Known Issues? ..... 8

## What CRs Are Included in This Service Pack?

### Implemented Change Requests

#### Software Improvements

This list highlights some of the major improvements to the DNCS that are included in this service pack. Contact your Cisco marketing manager for additional details on any these change requests (CRs).

##### **CR 31239**

The Session List WUI now displays correctly the Filtered Count value for sessions on the DNCS.

##### **CR 32103**

If a subscriber purchases a reservation pay-per-view (RPPV) event, then they no longer see a black screen at the beginning of the event. The black screen was caused by the camPsm process starting a timer too early while EIDs are populating the EUT table. If the timer starts before the event is active, then the camPsm process does not retry and the result was a black screen seen by the subscriber.

##### **CR 32584**

The FCC permits each broadcast relay station to hold a required monthly test (RMT) for up to 60 minutes before sending to the next relay station. When the message is received by the DNCS, the origination time on the message did not match the current system time and was not sent to the DHCT. The DNCS now passes this message to the DHCT, no matter what the origination time of the message.

##### **CR 39488**

The clearDBSessions utility removes orphaned and completed sessions from the DNCS database. The -a option removes all sessions in the system including video and audio sessions. If the -a option was used accidentally, all sessions would have to be set up again, resulting in significant system down time. This CR removes this option from the clearDBSessions utility.

##### **CR 49483**

The camEx process performance throughput was improved with SR 4.0.

##### **CR 49570**

Various memory leaks within the camEx process resulted in slower processing time. These memory issues are now corrected in the camEx process.

**CR 49972**

Previously, subscribers were seeing a black screen instead of video in the PPV free preview window. This CR corrects the issue on the DNCS.

**CR 50834**

If the siManager process unexpectedly shuts down, the process is designed to restart automatically. Previously, if the siManager process shut down more than three consecutive times, the process would not restart automatically. If you did not manually restart the siManager process, set-tops that rebooted would not have system information. This CR corrects the issue on the DNCS.

**CR 51974**

When you delete a source from the Sources tab of the BFS Administration window, now the only sessions torn down automatically are the session for the deleted source and any sessions numbered higher than the session for the deleted source. In addition, if the deletion for the source fails, no sessions are torn down.

**CR 52198**

The qamManager process correctly handles non-responsive QAMs.

**CR 52603**

The MMMServer is now able to register with the BFS server, if the MMMAud cabinet is missing from the BFS client.

**CR 52619**

A condition was reported where unknown DCM information was being sent to set-tops. As a result, these set-tops would not correctly boot up in DOCSIS mode. To address this issue, Cisco added the Digital Storage Media Command and Control (DSM-CC) message header to the UNConfig message.

**CR 52833**

Previously, the sgManager would intermittently send a refresh cache to the drm that caused a mismatch between the drm and dsm. This mismatch would result in segment information not being sent to the DSM; therefore, the content could go out in the clear. This CR corrects the issue on the DNCS.

**CR 54992**

The auditQAM utility now supports GQAMs.

**CR 55285**

EAS messages are now received correctly by multiple QPSK modulators.

**CR 56345**

The SNMPD process on the DNCS now allows alarms to be received and cleared from the QPSK, QAM, and BIG alarms.

**CR 56560**

When multiple master index files on the BFS are updated, the bfsRemote process sends a communication to the data pump to read the updated files. The data pump recognizes file updates by timestamp; therefore, it did not attempt to read multiple file updates within a second. Now, the data pump reads each new file it receives because it no longer reads the file timestamp and assumes a file change has happened when a communication is sent by the bfsRemote process.



# What Are the Site Requirements?

## Introduction

This section provides the following information:

- Identifies the CDs that are needed to install the service pack software
- List the software components tested and released as part of this service pack
- Provides the antecedents and prerequisites required before installing this service pack

## Antecedents

This release succeeds and carries forward all of the enhancements, features, and improvements of previous system releases and related service packs.

## Prerequisites

The DBDS must meet the following prerequisites before you install this service pack:

- SR 2.5 and 3.5 is currently installed on your system
- You have the CD labeled **DBDS Maintenance CD 2.1.x** in order to complete the required backups of the database and the filesystem

**Note:** The DBDS Maintenance CD replaces Backup/Restore Floppy 5.0.x, as well as versions 1.0.4 and 1.1.2 of the DBDS Maintenance CD. You cannot use the floppy disk to back up your system components.
- Sites that are using the RNCS component of the DBDS need the DVD labeled similarly to **RNCS Install DVD**

**Note:** Note that this is a DVD and not a CD.
- DBDS Utilities Version 5.1.x or later is installed on your system
- Verify that you have disabled inband system information (SI) on your system. For detailed instructions, refer to *Recommendations for Setting System Information to Out-of-Band*.

## System Release Compatibility

The following software applications and patches have been tested and are being released as part of this service pack:

- DNCS Application 4.0.0.27p3 and 4.0.0.27p5
- DNCS GUI/WUI 4.0.0.27 and 4.0.0.27p5

- DNCS/ Application Server Platform 3.5.0.3p1
- MQAM 2.5.0
- QAM Application 2.4.0
- GQAM 1.2.0
- QPSK C81

This service pack can be applied to DBDS networks operating at SR 2.5/3.5.

For a list of all available patches to date for SR 2.5/3.5 and a complete configuration listing for SR 2.5/3.5 SP1, please contact Cisco Services.

## Application Platform Release Dependencies

The following table shows the application platform release dependencies for this system release.

**Important!** You must have these versions of application platform software *or later* installed on your system prior to beginning the upgrade process. If you do not install the correct application platform software *before* you upgrade your network, then subscribers may see video freezing and black screens when using VOD or *anything-On-Demand* (xOD) applications.

**Note:** This table does not apply if you are using Enhanced Channel Maps.

Set-Top Platform	Operating System (OS)	SARA*	PowerKEY Version
Explorer 8300 DVR v. 1.3.1a17 (or later)	OS 6.14.10.1	1.87.14.1	3.7.5
Explorer 8000/8010 DVR v. 1.3.1a17 (or later)	OS 6.12.7.1	1.87.13.1	3.7.5
Explorer 3250HD MR4 P1 (or later)	OS 3.12.8.1	1.57.8.1	3.7.5
Explorer 2xxx, 31xx, 3200, 3100HD	OS 3.10.9	1.54.23.1	1.0.6.20 (Explorer 2000s) 1.0.7 (all others)

\* Cisco Resident Application

**Important!** If you are not using the Cisco Resident Application, contact your resident application provider to verify that you have the most recent version.

## Server Platforms

The following Digital Network Control System (DNCS) and Application Server hardware platforms are supported by this software release.

**DNCS**

Platform	Hard Drives	Memory
Sun Fire V880	12 X 73 GB	1 GB minimum <b>Note:</b> The Sun Fire V880 server ships with 8 GB of memory.
Sun Enterprise 450	<ul style="list-style-type: none"> <li>■ 7 X 9 GB</li> <li>■ 7 X 18 GB</li> <li>■ 10 X 9 GB</li> <li>■ 10 X 18 GB</li> </ul>	1 GB minimum
Sun Enterprise 250	<ul style="list-style-type: none"> <li>■ 2 X 9 GB</li> <li>■ 2 X 18 GB</li> </ul>	1 GB minimum

**Application Server**

Platform	Hard Drives	Memory
Sun Blade 150	1 X 40 GB	512 MB minimum
Sun Ultra 5	<ul style="list-style-type: none"> <li>■ 1 X 9 GB</li> <li>■ 1 X 20 GB</li> </ul>	256 MB minimum

## What Are the Known Issues?

### Introduction

This section lists the CRs that were found while testing this software. Efforts to address these issues are ongoing in the Cisco laboratories.

#### **CR 57476**

If a QAM is not selected on the session list GUI, then the session list incorrectly displays a list of all the QAM sessions.

**Workaround:** Ensure a QAM is selected before requesting a list of sessions.

#### **CR 59525**

If the operator uses the Send button on the emergency alert system (EAS) messages GUI to send multiple messages, then the GUI creates a corefile and the GUI closes.

**Workaround:** Close and reopen the GUI after each message is sent.

#### **CR 60809**

As you are setting up and saving a session, the session does not set up because the resources are processed with configuration errors.

**Workaround:** Emergency Patch 6 (EP6) is available to correct this issue.

### QAM Known Issue

#### **QAM CRs 59244 and 60424**

If you have a large system with inband SI enabled, this can create a very large SI table to be inserted onto the QAM. Receiving this large amount of data may cause QAM modulators to reboot.

**Workaround:** This issue can be avoided by disabling inband SI. Refer to *Recommendations for Setting System Information to Out-of-Band* and follow the procedures provided.

# 2

---

## DNCS Pre-Upgrade Procedures

This chapter contains procedures that must be completed before you begin the actual upgrade process. These pre-upgrade procedures consist mainly of system checks, backups, and various operations upon the metadevices of the DNCS.

The first few procedures of this chapter can be completed before the maintenance window begins, while the actual upgrade of DNCS software must be completed during a maintenance window. See *When to Complete These Procedures* (on page 12), for a list of those procedures that can be completed before the start of the maintenance window.

## In This Chapter

■ Before You Begin.....	11
■ When to Complete These Procedures .....	12
■ Plan Which Optional Features Will Be Supported.....	13
■ Verify the Integrity of the CDs.....	15
■ Back Up the Current Modulator Configuration Files.....	16
■ Run the Doctor Report .....	17
■ Examine Mirrored Devices .....	18
■ Verify DBDS Stability .....	19
■ Check the EAS Configuration – Pre-Upgrade .....	21
■ Obtain System Configuration .....	22
■ Check and Remove Sessions .....	23
■ Back Up the DNCS Filesystem and Application Server.....	24
■ Back Up the Informix Database .....	25
■ Suspend Billing and Third-Party Interfaces.....	26
■ Stop the dhctStatus and signonCount Utilities.....	27
■ Back Up and Delete the copyControlParams File .....	29
■ Stop System Components .....	30
■ Stop the cron Jobs .....	33
■ Detach Disk Mirroring on the DNCS.....	35
■ Ensure No Active Database Sessions on the DNCS.....	36
■ Remove the NMI Software .....	38

## Before You Begin

Before you begin the upgrade, ensure the following:

- Do not remove any third-party applications files from the DNCS or change any of their settings before beginning the upgrade process. This is useful if troubleshooting assistance is needed after the upgrade by limiting the number of changes made to the system.
- Call Cisco Services and open an upgrade tracking case.

## How Digital Services are Affected by the Installation

Note these important points about how digital services are affected by the installation of this service pack:

- Interactive services, such as pay-per-view (PPV) and *anything*-On-Demand (xOD), will not be available during the maintenance window.
- QAM, MQAM, GQAM, and QPSK modulators may need to be reset after the installation of the software. While the modulators are resetting, services carried on the modulators are briefly interrupted. Modulator resets require DHCTs to reconnect to the network and this interrupts inactive services. It usually takes about 5 minutes to reset each modulator.

## When to Complete These Procedures

### Upgrade Process

As you are planning the day of the upgrade, be sure to contact your billing vendor to make arrangements to suspend the billing interface on the night of the upgrade. This is an important step in the planning process to ensure that your system is not connected to the database during the upgrade process. In addition, contact the provider(s) of any third-party applications that your system supports. Follow their guidance in determining whether these third-party interfaces should be stopped and if the application needs to be updated during the upgrade.

### Complete These Procedures

#### Pre-Maintenance Window

To save valuable time, complete the following procedures in this chapter prior to the beginning of the maintenance window. Depending upon the size of the system you are upgrading, it should take about 3 or 4 hours to complete these procedures.

- *Plan Which Optional Features will be Supported* (on page 13)
- *Verify the Integrity of the CDs* (on page 15)
- *Back Up the Current Modulator Configuration Files* (on page 16)
- *Run the Doctor Report* (on page 17)
- *Examine Mirrored Devices* (on page 18)
- *Verify DBDS Stability* (on page 19)
- *Check the EAS Configuration – Pre-Upgrade* (on page 21)
- *Obtain System Configuration* (on page 22)
- *Check and Remove Sessions* (on page 23)
- *Back Up the DNCS FileSystem and Application Server* (on page 24)
- *Back Up the Informix Database* (on page 25)

#### During the Maintenance Window

Complete the remaining procedures in this chapter, as well as all the procedures of Chapter 3 during an appropriate maintenance window.



## Plan Which Optional Features Will Be Supported

### Optional Features

This software includes several optional features that system operators can elect to enable on their systems. Some of these features require that the system operator obtain a license for the feature to be activated; others can simply be activated by engineers at Cisco Services without a license.

**Important!** Any features that are currently enabled or licensed do not have to be re-enabled.

Determine which optional features (licensed or unlicensed) need to be enabled as a result of this upgrade. You will activate these optional features while the system processes are down.

If any licensed features are to be enabled as a result of this upgrade, contact Cisco to purchase the required license.

### Licensed Features

The following licensed features can be enabled with this software:

- EAS Filtering – Enables system operators to filter Emergency Alert System (EAS) messages by hub
- Enhanced Interactive Session Performance – Improves the efficiency with which the DNCS processes video-on-demand (VOD) sessions
- Session-Based Encryption – Activates encryption for session-based VOD
- Distributed DNCS – Allows the DNCS to manage several remote headends

## Enabled Features

The following optional features can be enabled by engineers at Cisco Services, without a special license:

- Conditional Access Mode—Specifies whether the Cisco (PowerKEY®) encryption method or a non-Cisco encryption method is used for DHCTs in the network
- DBDS Network Overlay—Allows Cisco DHCTs to be used on a Motorola system
- SI Type to Use—Specifies the type of System Information (SI) to use on the system (ATSC or DVB). ATSC is the standard SI type for North American cable systems. DVB is frequently used in Europe and other areas of the world
- Dynamic PID Mapping Mode—Allows for the use of non-unique transport stream IDs (TSIDs) throughout the system
- Preallocated Session Management—Permits the set up of sessions on Cisco Multiple Quadrature Amplitude Modulators (MQAMs) for use by an external session resource manager process for VOD
- Direct ASI—Permits the use of the asynchronous serial interface (ASI) card in the DNCS for transmitting inband data directly to a QAM without the need for a Broadband Integrated Gateway (BIG)  
**Note:** Refer to Appendix C for detailed instructions to install and configure the Direct ASI feature.
- Third-Party Source—Allows tuning tables to be built for clear digital sources generated by QAMs not managed by the DNCS, and eliminates the need to use a mirror QAM for Program and System Information Protocol (PSIP) services  
**Note:** For additional information, refer to the technical bulletin *Program and System Information Protocol Configuration for System Releases 2.5, 3.5, and 4.0*.
- Enhanced Split Channels—Enables two different content streams and multiple channel schedules at different times of the day
- Netcrypt Bulk Encryptor—Supports encrypted digital broadcast and narrowcast transport streams across multiple headends, using up to three distinct conditional access systems

## Verify the Integrity of the CDs

### Verifying the Integrity of the CDs

Follow these instructions to verify the integrity for each CD received in the software binder.

- 1 Follow these instructions to log on to the xterm window as **root** user.
  - a Type **su -** and press **Enter**. The **password** prompt appears.
  - b Type the root password and press **Enter**.
- 2 Insert the CD into the CD drive on the DNCS.
- 3 Type **cd /cdrom/cdrom0** and then press **Enter**. The **/cdrom/cdrom0** directory becomes the working directory.

**Note:** If a File Manager window opens after you insert the CD, close the window.

- 4 Type **ls -la** and then press **Enter**. The system lists the contents of the CD.
- 5 Did the system list the contents of the CD as expected?

- If **yes**, go to step 6.
- If **no**, the CD might be defective. Call Cisco Services for assistance.

- 6 Type **pkgchk -d . SAI\*** and then press **Enter**.

**Important:** Be sure to type the dot between the **-d** and **SAI\***.

**Results:**

- The system checks each package on the CD that starts with SAI.
- The system performs a checksum on each package and ensures that the checksum matches what is contained on the package map.
- The system lists the results of a package check.

**Note:** The system clearly lists any errors found during the package check.

- 7 Did the package check reveal any errors?

- If **yes**, contact Cisco Services for assistance.

**Important:** Do *not* proceed with the upgrade if the CD contains errors.

- If **no**, follow these instructions.

- a Type **cd /** and then press **Enter**.
- b Type **eject cdrom** and then press **Enter**.
- c Type **exit** and then press **Enter** to log out the root user.

- 8 Repeat steps 1 through 7 for each CD received in the software binder.

## Back Up the Current Modulator Configuration Files

### Backing Up the Current Modulator Configuration Files

Follow these instructions to back up your current QAM, MQAM, GQAM, and QPSK configuration files.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Follow these instructions to log on to the xterm window as **root** user.
  - a Type **su -** and press **Enter**. The **password** prompt appears.
  - b Type the root password and press **Enter**.
- 3 Type **cd /tftpboot** and then press **Enter**. The /tftpboot directory becomes the working directory.
- 4 Depending upon which configuration files you need to back up, choose one or more of the following options:
  - To back up the QAM configuration file, type **cp -p qam.config qam.config.<version number>** and then press **Enter**.
  - To back up the MQAM configuration file, type **cp -p mqam.config mqam.config.<version number>** and then press **Enter**.
  - To back up the GQAM configuration file, type **cp -p gqam.config gqam.config.<version number>** and then press **Enter**.
  - To back up the QPSK configuration file, type **cp -p qpsk.config qpsk.config.<version number>** and then press **Enter**.

**Note:** Substitute the current version of your modulator software for <version number>.
- 5 Type **exit** and then press **Enter**. The system logs out the root user.
- 6 Go to *Run the Doctor Report* (on page 17).

# Run the Doctor Report

## Analyze the Doctor Report

Before upgrading the DNCS, run the Doctor Report using the instructions provided in the *DBDS Utilities Version 5.1 Installation Instructions and DNCS Utilities User's Guide*. The Doctor Report provides key system configuration data that might be useful before you begin the upgrade process.

**Note:** On a typical system, the Doctor Report takes about 10 minutes to run.

Call Cisco Services if the Doctor Report indicates that the database requires an additional dataspace or a temp space.

When you analyze the output of the Doctor Report, be certain that no disk partition is at over 85 percent capacity. Call Cisco Services if the Doctor Report reveals that a disk partition is at over 85 percent capacity.

Also analyze the output of the Doctor Report to verify that the inband SI\_INSERT\_RATE is *not* greater than 0 (zero). If the inband SI\_INSERT\_RATE is greater than 0 (zero), refer to *Recommendations for Setting System Information to Out-of-Band*, and follow the procedures provided to disable inband SI.

**Important!** Do *not* go to *Verify DBDS Stability* (on page 19) until you have completed running and analyzing the Doctor Report and correcting any problems it reports.

## Examine Mirrored Devices

### Introduction

Before you disable the disk mirroring functions of the Enterprise 450 or the Sun Fire 880 DNCS in preparation of an upgrade, you should examine the status of the mirrored drives on your system. All the disk mirroring functions must be working normally before proceeding with the upgrade.

**CAUTION:**

If the disk mirroring functions of the DNCS are not working properly before the upgrade, you may not be able to easily recover from a failed upgrade.

### Examining the Mirrored Devices

Follow these instructions to examine the status of the mirrored drives on your Enterprise 450 or the Sun Fire 880 DNCS.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Type **metastat | more** and then press **Enter**. The system displays the status of all of the metadevices on the DNCS.  
**Note:** Press the **Spacebar**, if necessary, to page through all of the output.
- 3 Check the conditions of the following *two* items and then answer the question in step 4.
  - The designation **ok** appears in the **State** column next to each metadevice.
  - No **Hot Spare** indicates **In Use**.
- 4 Are both of the conditions listed in step 3 “true”?
  - If **yes** (to both conditions listed in step 3), go to *Verify DBDS Stability* (on page 19).
  - If **no** (to either or both conditions listed in step 3), call Cisco Services for help in resolving these issues with the metadevices.

# Verify DBDS Stability

## Prerequisites

Complete the following procedure on at least one test DHCT to verify the stability of your DBDS network *before* installing this software. The DHCT(s) that you use for this procedure should comply with the following specifications:

- Authorized for all third-party applications
- Unauthorized to view a PPV event without specifically buying the PPV event
- Capable of booting into two-way mode

**Important!** Note the following important points about this procedure:

- This procedure only applies to systems running the Cisco Resident Application (SARA). Check with Aptiv for an equivalent procedure if your system supports the Passport application.
- If this procedure is unsuccessful, contact Cisco Services before continuing with the upgrade.

## Verifying DBDS Stability

- 1 Complete these steps to perform a slow and fast boot on a test DHCT with a working return path (2-way mode).
  - a Boot a DHCT.
 

**Note:** Do *not* press the Power button.
  - b Access the Power On Self Test and Boot Status diagnostic screen on the DHCT and verify that all parameters, except UNcfg, display **Ready**.
 

**Note:** UNcfg displays **Broadcast**.
  - c Press the **Power** button on the DHCT to turn on the power and establish a two-way network connection.
  - d Access the Power On Self Test and Boot Status diagnostic screen on the DHCT and verify that all parameters, including UNcfg, display **Ready**.
- 2 Verify that you can ping the test DHCT.
- 3 Stage at least one new DHCT. After staging the DHCT, verify the following:
  - The DHCT loaded the current client release software.
  - The DHCT received at least 33 EMMs (Entitlement Management Messages).
  - The DHCT successfully received its Entitlement Agent.
- 4 Verify that the Interactive Program Guide (IPG) displays 7 days of valid and accurate data.

## **Chapter 2 DNCS Pre-Upgrade Procedures**

- 5 Verify the pay-per-view (PPV) barkers appear on the PPV channels correctly.
- 6 Verify that all third-party applications have loaded and operate properly.
- 7 Verify that you can purchase a video-on-demand and /or xOD program.



## Check the EAS Configuration—Pre-Upgrade

### Checking the EAS Configuration

Before installing the software, verify that your EAS equipment is working correctly by testing the system's ability to transmit EAS messages. Complete all of the procedures in Chapter 4, **Configure and Conduct EAS Tests**, in *Configuring and Troubleshooting the Digital Emergency Alert System, For Use With All System Releases*.

**Note:** You will check the EAS configuration after the upgrade to ensure there are no issues.

## Obtain System Configuration

### Obtaining System Configuration

Complete these steps to obtain basic system configuration data. You may need some of this information later during the upgrade.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Type **more /etc/hosts** and then press **Enter**. A list of IP (Internet Protocol) addresses and hostnames appears.
- 3 On a sheet of paper, write down the IP addresses of the hosts that appear in the /etc/hosts file.

**Important!** At a minimum, write down the IP addresses for the following hosts:

- appservatm \_\_\_\_\_
- dnccsatm \_\_\_\_\_
- dnccseth \_\_\_\_\_
- dnccsted \_\_\_\_\_

- 4 Type **uname -n** and then press **Enter**. The hostname for the DNCS appears.

**Important!** Call Cisco Services if the hostname contains a period (.). Cisco Services engineers will help you change it to a valid hostname.

- 5 Write down the hostname for the DNCS, as displayed in step 4: \_\_\_\_\_
- 6 From an xterm window on the Application Server, type **more /etc/hosts** and then press **Enter**. A list of IP addresses and hostnames appears.
- 7 Write down the IP addresses and hostnames for the following hosts:

- dnccsatm \_\_\_\_\_
- appservatm (if appservatm is not 10.253.0.10) \_\_\_\_\_

- 8 At the Application Server, type **uname -n** and then press **Enter**. The hostname for the Application Server appears.
- 9 Write down the hostname for the Application Server, as displayed in step 8:  
\_\_\_\_\_

# Check and Remove Sessions

## Introduction

After you have obtained your system configuration, your next step is to check the BFS QAM for the number of sessions and to remove any completed or orphaned sessions. This check is done both before and after the installation process is complete to provide a comparison of the number of sessions. This comparison indicates a successful upgrade by ensuring the correct number of sessions were built after the upgrade process is complete.

## Checking the BFS Sessions on the BFS QAM

Follow this procedure to check and record the number of pre-upgrade BFS sessions.

- 1 Choose one of the following options to check the number of BFS sessions:
  - Press the **Options** button on the front panel of the BFS QAM until the Session Count total appears.
  - Type `/dvs/dnscs/bin/auditQam -query <IPAddr> 2` and press **Enter**.  
**Note:** <IPAddr> is the IP address of the data QAM.
- 2 Record the **Session Count** total in the space provided. \_\_\_\_\_

## Removing Completed or Orphaned Sessions

Follow these instructions to remove completed or orphaned sessions by running the clearDbSessions utility.

**Note:** The clearDbSessions utility takes several minutes to complete and can be running in the background as you complete the remaining procedures in this chapter.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Type **clearDbSessions** and then press **Enter**. The system removes all completed session, resource, and network graph records more than 1 hour old from the database.
- 3 Type **clearDbSessions -c** and then press **Enter**. The system removes all completed session, resource, and network graph records from the database.
- 4 Type **clearDbSessions -o** and then press **Enter**. The system removes orphaned records from the database.
- 5 While the clearDbSessions utility is running go to *Back Up the DNCS Filesystem and Application Server* (on page 24) to continue with the pre-upgrade procedures.

## Back Up the DNCS Filesystem and Application Server

### Backing Up the DNCS Filesystem

Perform a complete backup of the filesystem now. Procedures for backing up the filesystem are contained in *DBDS Backup and Restore Procedures for SR 2.2/3.2, SR 2.5/3.5, SR 2.6/3.6, SR 3.3, CV SR 3.4, and SR 4.0*. The backup procedures have been modified so that you no longer have to shut down the DNCS or the Application Server to complete the backup. If necessary, call Cisco Services to obtain a copy of these backup and restore procedures.

#### Notes:

- Procedures for backing up the filesystem are found in Chapter 4, **Backing Up and Restoring the DNCS and Application Server**, in *DBDS Backup and Restore Procedures for SR 2.2/3.2, SR 2.5/3.5, SR 2.6/3.6, SR 3.3, CV SR 3.4, and SR 4.0*.
- It may take up to 2 hours to back up a DNCS filesystem; you can usually back up an Application Server filesystem in about 30 minutes.

# Back Up the Informix Database

## Backing Up the Informix Database

Perform a complete backup of the Informix database just before the beginning of the maintenance window. This ensures that you have the latest copy of the database before the start of the upgrade. For example, if this process typically takes 45 minutes to complete, then begin this process 45 minutes before the maintenance window begins.

Procedures for backing up the database are contained in *DBDS Backup and Restore Procedures for SR 2.2/3.2, SR 2.5/3.5, SR 2.6/3.6, SR 3.3, CV SR 3.4, and SR 4.0*. If necessary, call Cisco Services to obtain a copy of these backup and restore procedures.

### Notes:

- Procedures for backing up the Informix database are found in Chapter 3 of *DBDS Backup and Restore Procedures for SR 2.2/3.2, SR 2.5/3.5, SR 2.6/3.6, SR 3.3, CV SR 3.4, and SR 4.0*.
- It takes about 45 minutes to back up the database on a typical system.

## Suspend Billing and Third-Party Interfaces

### Important Note About the Maintenance Window

Be sure that you are within a maintenance window as you begin this procedure. You will remain in the maintenance window as you continue to complete the installation process. The post-upgrade procedures can be completed the day after the installation is complete.

### Suspending Billing and Third-Party Interfaces

Before installing this software, contact your billing vendor in order to suspend the billing interface. In addition, follow the third-party application provider's instructions you received before the maintenance window began to stop applications during the installation process.

# Stop the dhctStatus and signonCount Utilities

## Introduction

When sites are being upgraded, the dhctStatus utility may occasionally be in the process of polling DHCTs. Additionally, the signonCount utility may be active in system memory. Cisco engineers have discovered that upgrades proceed more smoothly when the dhctStatus utility is not actively polling DHCTs and when the signonCount utility is not active in system memory. The instructions in this chapter guide you through the steps to terminate polling associated with the dhctStatus utility and to remove the signonCount utility from system memory.

## Terminating the dhctStatus Utility Polling Operation

Follow these instructions to determine whether the dhctStatus utility is actively polling DHCTs, and then to terminate the polling operation, if necessary.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Type **dhctStatus** and press **Enter** to display the dhctStatus menu.
- 3 To terminate the polling operation, follow these instructions.
  - a Type **p** and then press **Enter**. The system displays a polling menu.
  - b If applicable, type **t** and then press **Enter**. The system terminates the polling operation.
  - c Press **Enter** to return to the main menu.
  - d Press **q** and then press **Enter** to exit the menu.
- 4 Type **ps -ef | grep dhctStatus** and then press **Enter** to determine if all of the processes are terminated.
- 5 Type **kill -9 processid** and then press **Enter** for each process ID displayed in step 4.
- 6 Repeat steps 4 and 5 for any process that continues to display active.

## Removing the signonCount Utility from System Memory

- 1 If necessary, open an xterm window on the DNCS.
- 2 Type **signonCount uninstall** and press **Enter**.

**Note:** The utility is not permanently uninstalled; it is placed back into system memory the next time you run the signonCount utility.
- 3 Type **ps -ef | grep signonCount** and then press **Enter**. A list of DNCS processes and process IDs display on the screen.
- 4 Type **kill -9 processid** and then press **Enter** for each process ID displayed in step 3.

## Chapter 2 DNCS Pre-Upgrade Procedures

- 5 Type **ps -ef | grep signonCount** and then press **Enter** to ensure all the processes are terminated.
- 6 Repeat steps 4 and 5 for any process that continues to display active.



## Back Up and Delete the copyControlParams File

### Backing Up and Deleting the copyControlParams File

Follow these instructions to back up and delete the copyControlParams.inf file from the DNCS.

- 1 Check with the system operator and determine whether the site you are upgrading has any customized entries in the copyControlParams.inf file.  
**Note:** If the copyControlParams.inf file has customized entries, you will make a back up copy of the file (in step 4) before deleting it.
- 2 If necessary, open an xterm window on the DNCS.
- 3 Type **cd /export/home/dncs** and then press **Enter**. The /export/home/dncs directory becomes the working directory.
- 4 Does the copyControlParams.inf file have any customized entries?
  - If **yes**, type **cp copyControlParams.inf copyControlParams.inf.bak** and then press **Enter**. The system makes a backup copy of the copyControlParams.inf file.
  - If **no**, go to step 5.
- 5 Type **rm copyControlParams.inf** and then press **Enter**. The system deletes the copyControlParams.inf file.

**Note:** When you restart the DNCS after the upgrade, the system will note the absence of the copyControlParams.inf file and will create a new one.

**Important!** After the upgrade, use the backup copy of the copyControlParams.inf file, as a reference, to add any customized entries to the new file.

## Stop System Components

### Introduction


Before continuing with the installation process, follow the instructions in this section to stop the Spectrum Network Management Service (Spectrum), the Application Server, and the DNCS.

### Stop Third-Party Servers

Some sites use devices that mount drives on the DNCS or the Application Server. These devices are usually used to register files with the BFS or to send BOSS transactions. Be sure to stop these devices. Also, be sure to stop any third-party applications.

### Stopping Spectrum

- 1 From the DNCS Administrative Console Status window, click **Control** in the NMS section of the window. The Select Host to run on window appears.
- 2 From the Select Host to run on window, click **OK**. The Spectrum Control Panel appears.

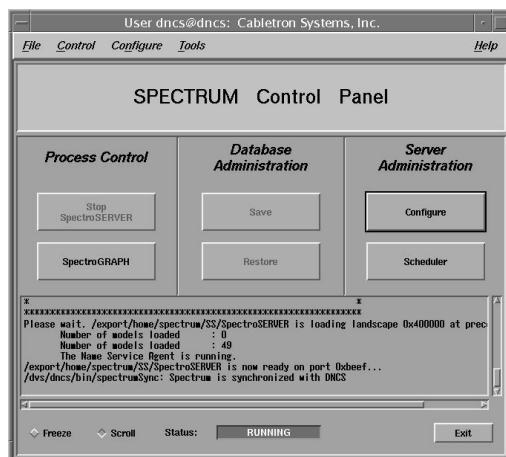

- 3 Click **Stop SpectroSERVER**. A confirmation message appears.
- 4 Click **OK** at the confirmation message. The Status message on the Spectrum Control Panel shows **Inactive**.
- 5 Click **Exit** on the Spectrum Control Panel. A confirmation message appears.
- 6 Click **OK** at the confirmation message. The Spectrum Control Panel closes.

## Stopping the Application Server

This section provides procedures for stopping either a SARA Server or an Aptiv Application Server. Choose the procedure that pertains to your system.

### Stopping the Application Server at SARA Sites

- 1 Press the middle mouse button on the Application Server and select **App Serv Stop**.
- 2 From an xterm window on the Application Server, type **appControl** and then press **Enter**. The Applications Control window appears.
- 3 Type **2** (for Startup/Shutdown Single Element Group), and then press **Enter**. The system displays all Application Server processes.

**Note:** The system updates the display periodically, or you can press **Enter** to force an update.

- 4 When the **Curr Stt** (Current State) field of the Applications Control window indicates that all of the Application Server processes have stopped, follow the on-screen instructions to close the Applications Control window.

### Stopping the Application Server at Aptiv Sites

- 1 Press the middle mouse button on the Application Server and select **Passport Stop**.
- 2 From an xterm window on the Application Server, type **CheckServices** and then press **Enter**. A list of drivers appears.

**Note:** Each driver is associated with an Application Server process.

- 3 Wait until the word **No** appears next to each driver.

**Note:** If the word **No** does not appear next to each driver within a minute or two, repeat steps 2 and 3 again.

## Stopping the DNCS

- 1 At the DNCS, press the middle mouse button and then select **DNCS Stop**.
- 2 From an xterm window on the DNCS, type **dncsControl** and then press **Enter**. The DnCS Control window appears.
- 3 Type **2** (for Startup/Shutdown Single Element Group), and then press **Enter**. The system displays all DNCS processes.  
**Note:** The system updates the display periodically, or you can press **Enter** to force an update.
- 4 When the **Curr Stt** (Current State) field of the DnCS Control window indicates that all of the DNCS processes have stopped, follow the on-screen instructions to close the DnCS Control window.

# Stop the cron Jobs

## Introduction

Stop any cron jobs that are currently running on the DNCS and the Application Server. This ensures that no applications or programs initialize during the installation process. Follow the instructions in this section to stop all cron jobs.

**Note:** A cron job refers to programs that run automatically, without specific user intervention.

## Stopping the cron Jobs on the DNCS

Follow these instructions to stop cron jobs on the DNCS.

**Note:** You should still be root user in an xterm window on the DNCS.

- 1 Type **ps -ef | grep cron** and then press **Enter**. The system lists running processes that include the word cron.
- 2 Did the results from step 1 include **/usr/sbin/cron**?
  - If **yes**, type **/etc/rc2.d/S75cron stop** and then press **Enter**. The system stops all cron jobs.
  - If **no**, go to Stopping the cron Jobs on the Cisco Application Server; the cron jobs are already stopped on the DNCS.
- 3 Confirm that the cron jobs have stopped by typing **ps -ef | grep cron** again and then press **Enter**. The system should list only the grep process.

## Stopping the Cron Jobs on the Cisco Application Server

Follow these instructions to stop cron jobs on the Cisco Application Server.

- 1 Are you already logged on to an xterm window as **root** user?
  - If **yes**, go to step 2.
  - If **no**, log on to an xterm window as root user.

**Note:** You need to be root user to run some of the commands in this procedure.
- 2 Type **ps -ef | grep cron** and then press **Enter**. The system lists running processes that include the word "cron".

- 3 Did the results from step 2 include `/usr/sbin/cron`?
  - If **yes**:
    - a Type `/etc/rc2.d/S75cron stop` and then press **Enter**. The system stops all cron jobs.
    - b Confirm that the cron jobs have stopped by typing `ps -ef | grep cron` again and then pressing **Enter**. The system should list only the `grep` process.
  - If **no**, the cron jobs are already stopped.
- 4 Go to *Detach Disk Mirroring on the DNCS* (on page 35).

# Detach Disk Mirroring on the DNCS

## Introduction

In *Examine Mirrored Devices* (on page 18), sites confirm the disk mirroring function is working correctly before beginning the upgrade process. In this procedure you now disable the mirroring functions on the DNCS to ensure that the contents of the mirrored disk reflects the data and configuration of the DNCS prior to an upgrade. If the upgrade fails for any reason, you can then swap the positions of the mirrored disks to restore your system to its condition prior to the upgrade attempt.

**Note:** Disabling disk mirroring is usually referred to as detaching disk mirroring.

## Detaching Disk Mirroring on the DNCS

Follow these instructions to detach the disk mirroring function of the Enterprise 450 or Sun Fire V880 DNCS. Sites with an Enterprise 250 DNCS should proceed instead to *Ensure No Active Database Sessions on the DNCS* (on page 36).

**Note:** You should still be logged in as root user to an xterm window on the DNCS.

- 1 Insert the CD labeled **DBDS Maintenance CD 2.1.x** into the CD-ROM drive of the DNCS.

- 2 Type **df -n** and then press **Enter**. A list of the mounted filesystems appears.

**Note:** The presence of /cdrom in the output confirms that the system correctly mounted the CD.

- 3 Type **/cdrom/cdrom0/s3/backup\_restore/mirrState -d** and then press **Enter**. The system displays the following message:

**WARNING!!**

**Proceeding beyond this point will DETACH all d7xx submirrors.**

**Are you certain you want to proceed?**

- 4 Type **y** and then press **Enter**. The system disables the disk mirroring functions on the DNCS.

- 5 Type **eject cdrom** and then press **Enter**. The system ejects the CD.

- 6 Go to *Ensure No Active Database Sessions on the DNCS* (on page 36).

## Ensure No Active Database Sessions on the DNCS

### Ensuring No Active Database Sessions on the DNCS

- 1 Close all windows and GUIs that are open except for the xterm window you are going to work in. Are you already logged into that xterm window as **root** user?  
**Note:** You need to be root user to run some of the commands in this procedure.
  - If **yes**, go to step 2.
  - If **no**, follow these instructions to log in as root user.
    - a Type **su -** and then press **Enter**.
    - b Type the root password and then press **Enter**.
- 2 Type **. /dvs/dnCS/bin/dnCSSetup** and then press **Enter**. The system establishes the correct user environment.  
**Important:** Be sure to type the dot followed by a space prior to typing /dvs.
- 3 Type **ps -ef | grep tomcat** and then press **Enter**. The system lists running processes that use the tomcat server.
- 4 Is the tomcat server running?
  - If **yes**, type **/etc/rc2.d/S98tomcat stop** and then press **Enter**.
  - If **no**, go to step 6.
- 5 Type **ps -ef | grep tomcat** and then press **Enter** to confirm that the tomcat server has stopped.  
**Note:** If the tomcat server is still running, repeat step 4.
- 6 Type **ps -ef | grep UI** and then press **Enter**. The system lists running UI processes.
- 7 Are any UI processes running (**dbUIServer** and **podUIServer**)?
  - If **yes**, type **/dvs/dnCS/bin/stopSOAPServers** and then press **Enter**.
  - If **no**, go to step 9.
- 8 Type **ps -ef | grep UI** and then press **Enter** to confirm that UI processes have stopped.  
**Note:** If any GUI processes are still running, repeat step 7.
- 9 Type **ps -ef | grep ui** and then press **Enter** to confirm that ui process have stopped.
- 10 Are any ui processes running?
  - If **yes**, type **kill -9 [PID]** and then press **Enter** for any consoleui process that was still running.
  - If **no**, go to step 11.



11 Type **showActiveSessions** and then press **Enter**.

**Result:** One of the following messages appears:

- A message indicating that the **INFORMIXSERVER** is **idle**
- A message listing active database sessions

12 Did the message in step 11 indicate that there are active database sessions?

- If **yes**, follow these instructions:
  - a Type **killActiveSessions** and then press **Enter**. The system removes all active sessions from the database.
  - b Type **showActiveSessions** again and then press **Enter**.
  - c Did a message appear indicating that there are active database sessions?
    - If **yes**, call Cisco Services.
    - If **no**, go to step 13.
- If **no**, go to step 13.

13 Type **dncsKill** and then press **Enter**. The system terminates the dnscsInitd process if it is still running.

14 Wait a few moments, type **ps -ef | grep dnscsInitd** and then press **Enter**. The system reports whether the dnscsInitd process is still running.

15 Is the dnscsInitd process still running?

- If **yes**, repeat this procedure from step 13.
- If **no**, go to *Remove the NMI Software* (on page 38).

## Remove the NMI Software

### Removing the NMI Software

- 1 Are you already root user in an xterm window on the DNCS?
  - If **yes**, skip to step 3.
  - If **no**, follow the instructions in step 2.
- 2 Follow these instructions to log on to the xterm window as **root** user.
  - a Type **su -** and press **Enter**. The **password** prompt appears.
  - b Type the root password and press **Enter**.
- 3 Type **pkginfo -l | grep SAIInmi** and then press **Enter**. The system lists the SAIInmi package if it is installed.
- 4 Is SAIInmi installed?
  - If **yes**, go to step 5.
  - If **no**, you do not have NMI loaded onto your system. Skip the rest of this section, and go to Chapter 3.
- 5 Type **ps -ef | grep ui** and then press **Enter**. The system displays a list of user interface processes that may still be running.
- 6 On a sheet of paper, write down the process IDs (PIDs) of any user interface process that is still running.
- 7 Type **kill -9 [PID]** and then press **Enter** for any user interface process that is still running. The system stops the user interface processes.
- 8 Type **pkgrm SAIInmi** and then press **Enter**. The system deletes the NMI software.
- 9 Go to *System Release 2.5/3.5 SP1 Installation Procedures* (on page 39).

# 3

## System Release 2.5/3.5 SP1 Installation Procedures

### Introduction

In this chapter, you will install the new software for the DNCS and the graphical and Web user interfaces (GUI and WUI) for the DNCS.

**Note:** If you followed the procedures in Chapter 2 correctly, all of the system components have been stopped. Additionally, you should still be logged on to an xterm window on the DNCS as root user.

**Important!** Do not attempt to perform the procedures in this chapter more than once. If you encounter any problems while upgrading the DNCS, contact Cisco Services.

### In This Chapter

■ Install the DNCS Software.....	40
■ Install the Service Pack.....	43
■ Install Additional Software .....	44
■ Check the Installed Software Version.....	45
■ Add an EAS Variable to the .profile File .....	47
■ Enable Optional and Licensed Features .....	48
■ Remove Scripts That Bounce the Pass-Through Process .....	49
■ Reboot the DNCS.....	51
■ Disable the SAM Process on Aptiv Systems .....	52
■ Restart the System Components.....	53
■ Restart the Application Server at Aptiv Sites .....	56
■ Restart the Billing and Third-Party Interfaces .....	57

## Install the DNCS Software

### Installing the DNCS Software

**Notes:**

- You should still be logged in as root user to the xterm window on the DNCS.
  - It may take as long as 2 hours to install the DNCS software.
- 1 Insert the CD labelled **DNCS Application 4.0.0.27** into the CD drive of the DNCS. The system automatically mounts the CD to /cdrom within 30 seconds.
  - 2 Type **df -n** and then press **Enter**. A list of the mounted filesystems appears.  
**Note:** The presence of /cdrom in the output confirms that the system correctly mounted the CD.
  - 3 Type **cd /cdrom/cdrom0** and then press **Enter**. The /cdrom/cdrom0 directory becomes the working directory.
  - 4 Type **swmtool -d** and then press **Enter** to open the Add Software window.
  - 5 From the Admintool: Add Software window, select **Cancel**. The Admintool: Software window opens.
  - 6 From the Admintool: Software window, select **Properties** and then choose **Package Administration** from the pull-down menu.
  - 7 Set the fields on the Admintool: Package Administration window to the following values:
    - Existing Files — **Overwrite**
    - Existing Packages — **Overwrite**
    - Existing Partial Installations — **Ask**
    - Install setuid/setgid Files — **Yes**
    - Run setuid/setgid Scripts — **Yes****Note:** Leave the remaining fields at their default value.
  - 8 Select **OK** to accept the values you selected.
  - 9 From the Admintool: Software window, select **Edit** and then choose **Add** from the pull-down menu. The Admintool: Add Software window reappears.
  - 10 Select the DNCS Application package option.
  - 11 Select **Add** on the Admintool: Add Software window. You will see a copyright message and confirmation message.

- 12 Type **y** (for yes) and then press **Enter**. The system lists some configuration parameters of system components and asks that you confirm their accuracy.

```

brutus
All Right Reserved

This product is protected by copyright and distributed under
licenses restricting copying, distribution and decompilation.

Hit <CR> to continue...
Although errors during system upgrade are unlikely, you
should have a backup of your current system and DNCS database.
Have you backed up your DNCS host and DNCS database? (yes/no) ? y
***** Installation Configuration *****
**
**      0) INFORMIXSERVER      =      brutusDbServer      **
**      1) DNCS_HOST          =      brutus              **
**      2) BFS_HOST           =      brutus              **
**      3) DNCSATM_IP         =      10.253.0.1          **
**      4) APPSERVATM_IP      =      10.253.0.10         **
**      5) DNCSTED_IP         =      192.168.1.2         **
**
*****
Number to change ("0", "1", ...), "c" to continue, or "q" to quit:

```

- 13 Refer to the notes you took in the *Obtain System Configuration* (on page 22) and verify that the configuration parameters are listed correctly; then press **c** to continue. The DNCS software installs on the DNCS.

**Note:** If you have to change any parameters, follow the on-screen instructions to do so. Only in rare cases will you have to modify a parameter.

- 14 Press **Enter** to begin installing the software.
- 15 Press the right mouse button in the Admintool:Add Software window and select **History**.
- 16 Select **Save As** to open the Save As window.
- 17 Check the log file for errors during the installation process. Did the log file display errors?
- If **no errors** are detected, go to step 18.
  - If **errors** are detected, call Cisco Services for assistance.
- 18 Which file are you saving in the /dvs/dnCS/tmp directory?
- For the DNCS Application 4.0.0.27, save this file as **dncssp1.log**.
  - For the remainder of the CDs, save each software component as a different file.

### Chapter 3 System Release 2.5/3.5 SP1 Installation Procedures

- 19 Select **File** and choose **Close** on the Admintool:Add Software window.
- 20 Follow these instructions to eject the CD.
  - a Type **cd /** and then press **Enter**.
  - b Type **eject cdrom** and then press **Enter**.
- 21 Repeat steps 4 through 11 and steps 14 through 20 (skipping steps 12 and 13) for each of the following CDs:
  - a DNCS GUI/WUI 4.0.0.27
  - b GQAM 1.2.0
  - c QAM Application 2.4.0
  - d DNCS Application 4.0.0.27p3
- 22 After all of the CDs have been installed in step 21, go to *Install the Service Pack* (on page 43).

# Install the Service Pack

## Installing the Service Pack

- 1 Insert the DBDS Service Pack CD into the CD drive of the DNCS. The system automatically mounts the CD within 30 seconds.
- 2 Is the File Manager window is open?
  - If **yes**, select **File** and choose **Close**, then go to step 3.
  - If **no**, go to step 3.
- 3 Type **df -n** and then press **Enter**. A list of the mounted file systems appears.  
**Note:** The presence of `/cdrom` in the output confirms that the system correctly mounted the CD.
- 4 Type **/cdrom/cdrom0/install\_SP** and then press **Enter**. A list of packages displays.
- 5 Type **y** and then press **Enter**. The software installs on the DNCS.
- 6 Type **eject cdrom** and then press **Enter**.
- 7 Check the log file for errors. Go to *Install Additional Software* (on page 44) if the log file indicates that the service pack software installed without error.

### Notes:

- The installation log file is in the `/var/sadm/system/logs` directory of the DNCS.
- Call Cisco Services for assistance if the log file reveals errors.

## Install Additional Software

### Installing Additional Software

Cisco may have provided you with additional software, such as a patch, to install after you have finished installing all of the software components. If this is the case, install the additional software now using the instructions provided with the software. These instructions may be either a written document or bundled with the software as a readme file. Either type of instructions provide step by step procedures to install the additional software.

After installing any additional software, go to *Check the Installed Software Version* (on page 45).



# Check the Installed Software Version

## Introduction

Use *pkginfo*, a Solaris software management tool, to verify installed software versions on the DNCS and the Application Server. Use the **Version** field and the **Status** field of the output produced by *pkginfo* to obtain the information you need. If the Status field indicates that the software is not completely installed, contact Cisco Services for help.

**Note:** Running the Doctor Report with the `-g` option also displays installed software versions.


## Verifying DNCS Versions

Follow these instructions to verify the installed software versions on the DNCS.

- 1 From an xterm window on the DNCS, type `pkginfo -l [Package Name]` and then press **Enter**.

### Notes:

- The "l" in `-l` is a lowercase letter L.
- Substitute the software component you are verifying for [Package Name].
- Use **SAIdnsc** for Package Name the first time you run this procedure.

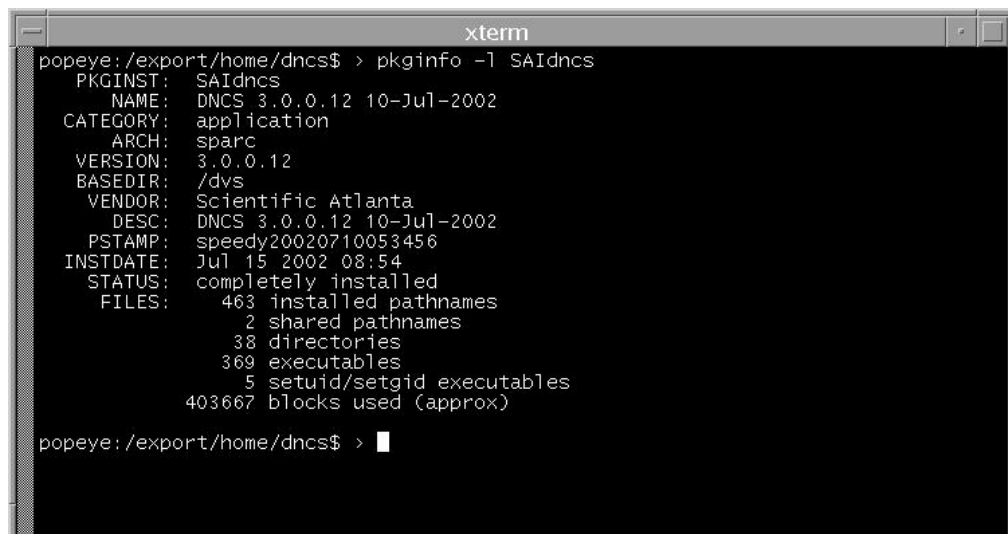

```

xterm
popeye:/export/home/dnsc$ > pkginfo -l SAIdnsc
PKGINST: SAIdnsc
NAME: DNCS 3.0.0.12 10-Jul-2002
CATEGORY: application
ARCH: sparc
VERSION: 3.0.0.12
BASEDIR: /dys
VENDOR: Scientific Atlanta
DESC: DNCS 3.0.0.12 10-Jul-2002
PSTAMP: speedy20020710053456
INSTDATE: Jul 15 2002 08:54
STATUS: completely installed
FILES: 463 installed pathnames
       2 shared pathnames
       38 directories
       369 executables
       5 setuid/setgid executables
       403667 blocks used (approx)

popeye:/export/home/dnsc$ > █
  
```

**Example:** Notice that the Version field indicates that DNCS version 3.0.0.12 is installed on the DNCS, and the Status field indicates that the software is completely installed.

- 2 Record the version number in the Actual Results column of the accompanying table for each Package Name you check.

Component	Pkg Name	Expected Results	Actual Results
DNCS Application	SAIdncs	4.0.0.27p5	
DNCS/ App Tools	SAIttools	3.5.0.7	
DNCS GUI	SAIgui	4.0.0.27p5	
DNCS WUI	SAIwebui	4.0.0.27p5	
Spectrum Kit	SAIsokit	2.0.0.8	
DNCS Online Help	SAIhelp	3.5.0.3	
DNCS Report Writer	SAIrptwrt	3.5.0.2	
QAM	SAIqam	2.4.0	
MQAM	SAImqam	2.5.0	
GQAM	SAIqqam	1.2.0	
GoQAM	SAIgoqam	1.1.2	
QPSK	SAIqpsk	C81	

- 3 Repeat steps 1 and 2 for each Package Name in the table in step 2.
- 4 Do the first three digits of the **Actual Results** match the first three digits of the **Expected Results** for each component in the table in step 2?
  - If **yes**, go to *Disable the SAM Process on Aptiv Systems* (on page 52) for Aptiv sites or *Add an EAS Variable to the .profile File* (on page 47) for SARA sites.
  - If **no**, call Cisco Services and inform them of the discrepancy.

**Note:** The build number (the fourth digit of the version number) may differ.

# Add an EAS Variable to the .profile File

## Introduction

In order to make the EAS work properly, you need to add the LOCAL\_EAS\_IP variable to the .profile file. This procedure describes how to add the LOCAL\_EAS\_IP variable.

## Adding an EAS Variable to the .profile File

Follow these instructions to add the LOCAL\_EAS\_IP variable to the .profile file.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Type **cat /etc/hosts | grep dncseth** and then press **Enter**. The system displays the value of the dncseth variable in the /etc/hosts file.
- 3 In the space provided, record the IP address associated with dncseth.

---

**Note:** This IP address represents the Ethernet address of the DNCS, which you will need in step 8.

- 4 Type **grep -i LOCAL\_EAS\_IP /export/home/dnsc/.profile** and then press **Enter** and you will search the /export/home/dnsc/.profile file.

**Note:** Type a space between grep -i LOCAL\_EAS\_IP and /export/home/dnsc/.profile.

- 5 Verify if the entry LOCAL\_EAS\_IP is in the file and go to step 6.
- 6 Does the entry contain the IP address of the dncseth entry in the /etc/hosts file?
  - If **yes**, go to *Enable Optional and Licensed Features* (on page 48).
  - If **no**, go to step 7.

- 7 Type **vi .profile** and then press **Enter**. The .profile file opens for editing using the Unix vi text editor.

- 8 Append the following line to the .profile file:  
**export LOCAL\_EAS\_IP=[Ethernet address of the DNCS]**

**Note:** Substitute the Ethernet address of the DNCS for [Ethernet address of the DNCS] that you recorded in step 3.

- 9 Save the file and close the vi text editor.

**Note:** Your changes to the .profile will take effect when you restart the system components in the next procedure.

- 10 Go to *Enable Optional and Licensed Features* (on page 48).

## Enable Optional and Licensed Features

### Enabling Optional and Licensed Features

If you have properly followed the instructions in this chapter, the system processes should currently be stopped. Now is the time to enable the optional features you have chosen as part of this upgrade, except for Direct ASI. Contact Cisco Services to have the licensed or optional features enabled on your network.

**Exception:** The Direct ASI feature requires extensive system configuration. If the system you are upgrading is to support this feature, go to *Direct ASI Installation and Configuration Procedures* (on page 89) for instructions to install and configure this feature.

# Remove Scripts That Bounce the Pass-Through Process

## Introduction

In order to correct some issues associated with the Pass-Through process on the DNCS, some sites have been regularly bouncing this process through scripts that reside in the crontab file. This software corrects issues associated with the Pass-Through process. Therefore, after the upgrade, you should remove any entries in the crontab file that reference scripts that bounce the Pass-Through process. The instructions in this section guide you through the process of removing these references.

### Notes:

- Bouncing a process refers to stopping and then restarting that process.
- The scripts that Cisco wrote to bounce the Pass-Through process are called **elop.sh** and **bouncePassThru**.

## Removing Scripts That Bounce the Pass-Through Process

Follow these instructions to remove entries from the crontab file that reference scripts that bounce the Pass-Through process.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Follow these instructions to check on the presence of scripts in the crontab file that bounce the Pass-Through process.
  - a Type **crontab -l | grep -i elop.sh** and then press **Enter**. The system lists the line(s) within the crontab file that contain elop.ksh.
  - b Type **crontab -l | grep -i bouncePassThru** and then press **Enter**. The system lists the line(s) within the crontab file that contain bouncePassThru.
- 3 Did the output of step 2 contain any references to the elop.sh or the bouncePassThru scripts?
  - If **yes**, go to step 4 to remove those references.
  - If **no**, then go to *Reboot the DNCS* (on page 51).

**Note:** You do not have to remove any references to the scripts from the crontab file.

- 4 Type **crontab -l > /tmp/dncs.crontab** and then press **Enter**. The system redirects the contents of the crontab into dncs.crontab.  
**Note:** While you can edit the crontab directly, Cisco recommends that you first redirect the contents of the crontab to dncs.crontab so you can recover the original crontab if necessary.
- 5 Type **vi /tmp/dncs.crontab** and then press **Enter**. The dncs.crontab file opens for editing using the vi text editor.
- 6 Remove all lines from the dncs.crontab file that reference the elop.ksh or bouncePassThru scripts.
- 7 Save the dncs.crontab file and close the vi text editor.
- 8 Type **crontab /tmp/dncs.crontab** and then press **Enter**. The just-edited dncs.crontab file becomes the crontab file.
- 9 Go to *Reboot the DNCS* (on page 51).

## Reboot the DNCS

### Rebooting the DNCS and Application Server

After installing the software onto the DNCS, follow these instructions to reboot the DNCS and Application Server.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Follow these instructions to log on to the xterm window as **root** user.
  - a Type **su -** and press **Enter**. The **password** prompt appears.
  - b Type the root password and press **Enter**.
- 3 From an xterm window on the Application Server, type **/usr/sbin/shutdown -g0 -y -i0** and then press **Enter**. The Application Server shuts down.
- 4 From an xterm window on the DNCS, type **/usr/sbin/shutdown -g0 -y -i6** and then press **Enter**. The DNCS reboots and the CDE Login window appears.
- 5 Log on to the DNCS as **dncs** user.
- 6 At the **ok** prompt on the Application Server, type **boot** and then press **Enter**. The Application Server reboots.
- 7 Log on to the Application Server as **dncs** user.
- 8 Is your Application Server running SARA or Aptiv application?
  - If you are a **SARA** site, go to *Restart the System Components* (on page 53).
  - If you are an **Aptiv** site, go to *Disable the SAM Process on Aptiv Systems* (on page 52).

## Disable the SAM Process on Aptiv Systems

### Disabling the SAM Process on Aptiv Systems

If the site you are upgrading uses the Aptiv application server, you need to disable the SAM process before you reboot the DNCS. Follow these instructions to disable the SAM process.

**Important!** Skip this procedure if the site you are upgrading does not use the Pioneer application server.

- 1 In the DNCS section of the DNCS Administrative Console Status window, click **Control**. The DNCS Monitor window opens.
- 2 From an xterm window on the DNCS, type **dncsControl** and then press **Enter**. The DNCS Control window opens.
- 3 Type **4** (for Define/Update Grouped Elements) and then press **Enter**. The window updates to list a series of element groups.
- 4 Type **14** (for saManager) and then press **Enter**. The window updates to list the elements in the group.
- 5 Type **1** (for /dvs/dncs/bin/saManager) and then press **Enter**. The first in a series of confirmation messages appears.
- 6 Press **Enter** at each conformation message to accept the default setting, until a message about **cpElmtExecCtrlStatus** appears. In total, you should see about six confirmation messages.
- 7 At the cpElmtExecCtrlStatus message, type **2** (for Disabled) and then press **Enter**. A confirmation message appears.
- 8 Type **y** (for yes) and then press **Enter**. The message **Element Definition was Modified** appears.
- 9 Follow the on-screen instructions to exit from the DNCS Control window.



# Restart the System Components


## Introduction

After installing this software, follow these instructions to restart the system components.

## Restarting Spectrum

**Note:** Skip this procedure if you are using Alarm Manager, instead of Spectrum.

- 1 From the DNCS Administrative Console Status window, click **Control** in the NMS section of the window. The Select Host to run on window opens.
- 2 Select the Host Machine (usually DEFAULT), and then click **OK**. The Spectrum Control Panel window opens.

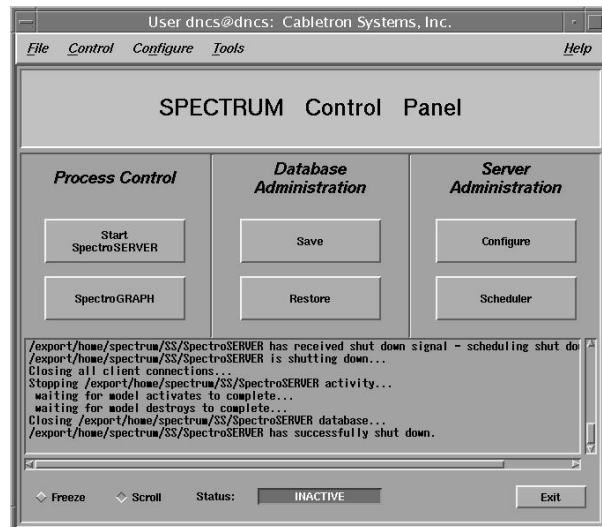

- 3 On the Spectrum Control Panel window, click **Start SpectroSERVER**. The Spectrum Network Management System starts.
- 4 On the Spectrum Control Panel window, click **Exit**. A confirmation message appears.
- 5 Click **OK** on the confirmation message. The Spectrum Control Panel window closes.

## Restarting the DNCS

- 1 Click the middle mouse button on the DNCS and select **DNCS Start**. The DNCS processes start.
- 2 Click the middle mouse button on the DNCS and select **Administrative Console**. The DNCS Administrative Console opens.
- 3 From the DNCS Administrative Console Status window, click **DNCS Monitor**.

### Results:

- The DNCS Monitor window opens.
  - Green indicators begin to replace red indicators on the DNCS Monitor window.
- 4 From an xterm window on the DNCS, type **dncsControl** and then press **Enter**. The DnCS Control window opens.
  - 5 Type **2** (for Startup / Shutdown Single Element Group) and then press **Enter**. The DnCS Control window updates to list the status of all of the processes and servers running on the DNCS.
  - 6 Wait for the DnCS Control window to list the current status (Curr Stt) of all the processes and servers as **running**.

### Notes:

- The DnCS Control window updates automatically every few seconds or you can press **Enter** to force an update.
- The indicators on the DNCS Control Monitor will all become green when the processes and servers have restarted.

## Restarting the Cisco Application Server

**Note:** If the site you are upgrading uses the Pioneer Application Server, skip this procedure and go to *Restart the Application Server at Aptiv Sites* (on page 56).

- 1 If necessary, open an xterm window on the Application Server.
- 2 Type **appControl** and then press **Enter**. The Applications Control window opens.
- 3 Select option **2** on the Applications Control window. The system displays a list of Application Server processes and their current status.
- 4 Does the word **running** appear next to the current state field (Curr Stt) of each process?
  - If **yes**, skip the rest of this procedure and go to *Restart the Billing and Third-Party Interfaces* (on page 57).
  - If **no**, go to step 5.
- 5 Press the middle mouse button, and then select **App Serv Start**.
- 6 When the Application Control window indicates that the current state (Curr Stt) of each process is **running**, go to step 7.

**Note:** On some systems, the BFS Remote process may remain at **Stopped**; this is normal.
- 7 Follow the on-screen instructions to close the Applications Control window.

## Restart the Application Server at Aptiv Sites

### Introduction

Follow this procedure *only* if the site you are upgrading supports the Aptiv Application Server. If the site you are upgrading supports the Cisco Application Server, skip this section and go to *Restart the Billing and Third-Party Interfaces* (on page 57).

### Restarting the Application Server at an Aptiv Site

Follow these instructions to check if the Aptiv application has started on the Application Server, and then to start it, if necessary.

- 1 If necessary, open an xterm window on the Application Server.
- 2 Type **CheckServices** and then press **Enter**. A list of drivers appears.  
**Note:** Each driver is associated with an Application Server process.
- 3 Does the word **Yes** appear next to each driver?
  - If **yes**, skip the rest of this procedure and go to *Restart the Billing and Third-Party Interfaces* (on page 57).
  - If **no**, go to step 4.**Note:** The word **Yes** next to a driver indicates that the process has started.
- 4 Press the middle mouse button, and then select **Passport Start**.
- 5 When the word **Yes** appears next to each driver, go to step 6.
- 6 Follow the on-screen instructions to close the window containing the list of Aptiv drivers.

## Restart the Billing and Third-Party Interfaces

### Restart the Billing and Third-Party Interfaces

Contact your billing vendor to restart the billing interface. If you stopped any third-party interfaces during the pre-upgrade process then the interfaces should be restarted. After checking the third-party interfaces, then check cron to see if any third-party interfaces were scheduled to start during the installation process while the system was stopped. These scheduled interfaces should now be started. For example, if the IPG collector was scheduled to start during the installation, then you would need to start that process at this point in the process.



# 4

## Post-Upgrade Procedures

### Introduction

Follow the procedures in this chapter to complete the upgrade process.

### In This Chapter

■ Configure SAM Timers .....	60
■ Configure the CableCARD Server.....	61
■ Check the EAS Configuration – Post Upgrade.....	63
■ Check BFS QAM Sessions.....	64
■ Authorize the BRF as a BFS Server (Optional) .....	67
■ Final System Validation Tests .....	70
■ Reset the Modulators.....	72
■ Reinstall the NMI Software .....	73
■ Re-Enable the Disk Mirroring Function .....	74

## Configure SAM Timers

### Introduction


After you complete the installation process, the **Update Timer** and **Schedule Timer** fields on the SAM Configuration window need to be set at specific values. These values ensure that channel maps and the database have sufficient time to update. The instructions in this section guide you through the necessary steps.

**Important:** Skip this procedure if your site does not support SARA.

### Configuring the SAM Timers

Follow these instructions to set the Update Timer and Schedule Timer fields on the SAM Configuration window.

- 1 From the DNCS Administrative Console, select the **Application Interface Modules** tab and then click **SAM Config**. The SAM Configuration window opens.
- 2 Follow these instructions to configure the SAM Configuration window.
  - a In the **Update Timer** field, type **600**.
  - b In the **Schedule Timer** field, type **1200**.

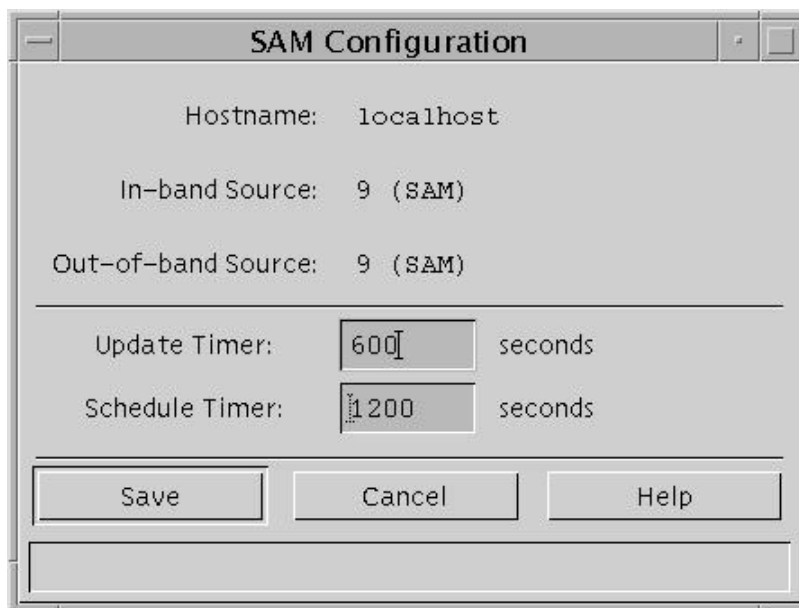

The screenshot shows the 'SAM Configuration' dialog box. It has a title bar with standard window controls. Inside, the 'Hostname' is set to 'localhost'. Below that, 'In-band Source' and 'Out-of-band Source' are both set to '9 (SAM)'. A horizontal line separates these from the timer settings. The 'Update Timer' is set to '600' seconds, and the 'Schedule Timer' is set to '1200' seconds. At the bottom, there are three buttons: 'Save', 'Cancel', and 'Help'.

- 3 Click **Save**.



# Configure the CableCARD Server

## Introduction

Next in the post-upgrade process, the **Set Authorization Time-out Period** and **Set DeAuthorization Time-out Period** fields on the Configure CableCARD Server window need to be set at specific values. These values instruct the CableCARD server when to stop adding authorization and deauthorization records to the BFS file, which keeps the BFS file from growing too large. The instructions in this section guide you through the necessary steps.

## Configuring the CableCARD Server

Follow these instructions to configure the minimum Set Authorization Time-out Period and Set DeAuthorization Time-out Period fields on the Configure CableCARD Server window.

- 1 From the DNCS Administrative Console, select the **DNCS** tab.
- 2 Select the **Element Provisioning** tab and then click **CableCARD**. The CableCARD Data Summary screen opens.

Select	CableCARD ID	CableCARD MAC Address	Host ID	Encoded Host id	Host Change Count	Unbind Host
<input type="checkbox"/>	0-010-275-528-460	00:02:DE:A4:6C:4E	0-170-000-235-466	440005BFA	1	No
<input type="checkbox"/>	0-010-275-529-427	00:02:DE:A4:6C:AE	0170000174806	440004448	1	No
<input type="checkbox"/>	0-010-280-365-221	00:02:DE:AB:CD:AA	0-010-314-333-245	041DFA26C	1	No
<input type="checkbox"/>	0-010-280-365-239	00:02:DE:AB:CD:AB	0-010-280-365-833	041ABCDE7	1	No
<input type="checkbox"/>	0-010-280-365-270	00:02:DE:AB:CD:AF	0-010-314-333-245	041DFA26C	1	No
<input type="checkbox"/>	0-010-280-365-890	00:02:DE:AB:CD:ED	0-010-280-365-833	041ABCDE7	1	Yes
<input type="checkbox"/>	0-010-280-365-908	00:02:DE:AB:CD:EE	0-010-280-365-833	041ABCDE7	1	No
<input type="checkbox"/>	0-010-280-365-916	00:02:DE:AB:CD:EF	0-010-280-365-833	041ABCDE7	3	No
<input type="checkbox"/>	0-010-314-334-714	00:02:DE:DF:A2:FF	0-010-314-333-245	041DFA26C	1	No
<input type="checkbox"/>	0-010-405-721-761	00:0A:73:6B:15:10	0-070-001-498-339	1C0024949	1	No

- 3 Click **Configure CableCARD Server**. The CableCARD Data Summary screen updates to display Configure CableCARD Server portion of the screen.

CableCARD Data from oliveoil – Netscape 6

File Edit View Search Go Bookmarks Tasks Help

http://oliveoil.8045/pod/podParentFrame.jsp

DNCS/CableCARD Data Summary/Configure CableCARD Server

Save CableCARD Server Configuration

Exit all CableCARD Screens

Help

### Configure CableCARD Server

**CableCARD Server Address**

IP Address: 0.11.12.13 Port Number: 3984

**CableCARD Module Parameters**

Authorization Time-out Period: 16 Hour

DeAuthorization Time-out Period: 1 Days

Max Key Session Period: 1 10-second interval

RF Output: Channel 3 Channel 4

### CableCARD Data Summary

CableCARD ID	CableCARD MAC Address	Host ID	Encoded Host id	Host Change Count	Unbind Host
0-010-275-528-460	00:02:DE:A4:6C:4E	0-170-000-235-466	440005BF4	1	No
0-010-275-529-427	00:02:DE:A4:6C:AE	0170000174806	440004448	1	No

- 4 Follow these instructions to configure the CableCARD Modules Parameters section of the screen.
  - a In the **Set Authorization Time-out Period** field, type **16**.
  - b In the **Set DeAuthorization Time-out Period** field, type **1**.
- 5 Click **Save CableCARD Server Config**.
- 6 Click **Exit all CableCARD Screens**.

## Check the EAS Configuration—Post Upgrade

### Checking the EAS Configuration

You now need to verify that your EAS equipment is working correctly by testing the system's ability to transmit EAS messages. Complete all of the procedures in **Testing the EAS** of *Configuring and Troubleshooting the Digital Emergency Alert System, For Use With All System Releases*. After completing the procedures in this chapter verify that an EAS message is generated from the Emergency Alert Controller (EAC).

## Check BFS QAM Sessions

### Introduction

After you have obtained your system configuration, your next step is to check the BFS QAM for the number of sessions and to remove any completed or orphaned sessions. This check is done both before and after the installation process is complete to provide a comparison of the number of sessions. This comparison indicates a successful upgrade by ensuring the correct number of sessions were built after the upgrade process is complete.

### Verifying the Number of Recovered BFS Sessions

Follow these steps to check the number of post-upgrade BFS sessions.


- 1 Press the **Options** button on the front panel of the BFS QAM until the **Session Count** total appears.
- 2 Does the **Session Count** total equal the number of sessions you recorded in the *Checking the BFS Sessions on the BFS QAM* (on page 23) procedure?
  - If **yes**, skip the remainder of this section, and go to *Authorize the BRF as a BFS Server (Optional)* (on page 67). The system recovered all of the BFS sessions.
  - If **no**, *Tear Down BFS and OSM Sessions* (on page 64).

### Tear Down BFS and OSM Sessions


Complete these steps to tear down the BFS and OSM sessions in order to return the BFS session count to the expected number of sessions.

- 1 On the DNCS Control window, highlight the **bfsServer** process.
- 2 Click **Process** and then select **Stop Process**. In a few minutes, the indicator for the bfsServer process changes from green to red.
- 3 Highlight the **osm** process.
- 4 Click **Process** and then select **Stop Process**. In a few minutes, the indicator for the osm process changes from green to red.
- 5 On the DNCS Administrative Console, select the **DNCS** tab and go to **Utilities**.

- 6 Click **Session List**. The Session Filter window opens.

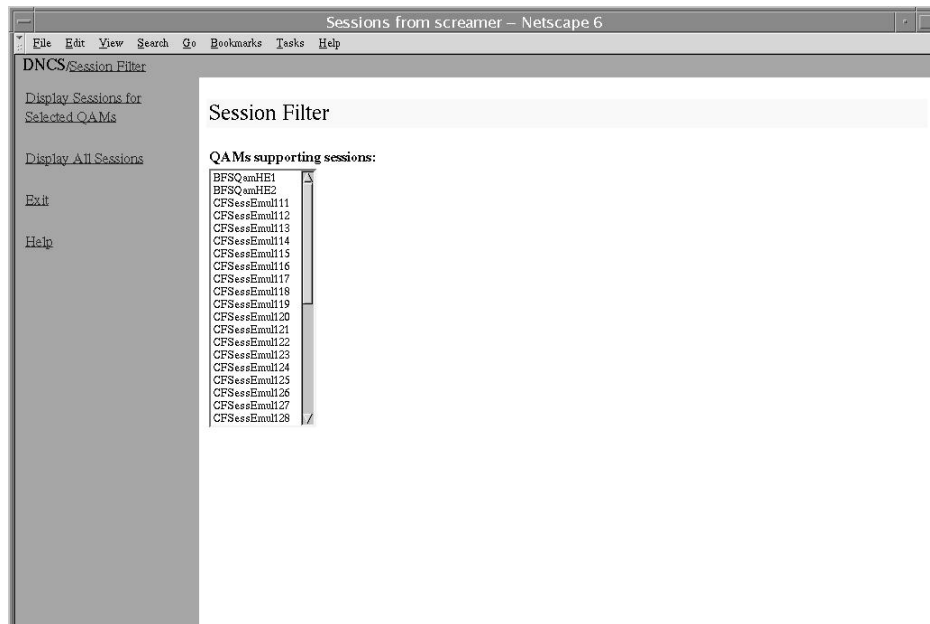

- 7 Select the BFS QAM from the Session List and then click **Display Sessions** for the sessions associated with the BFS QAMs.

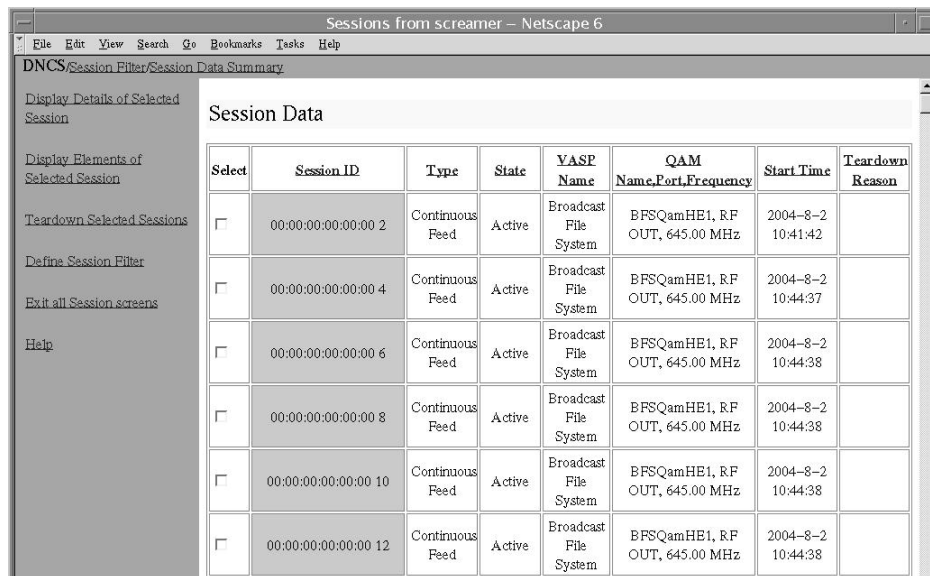

- 8 In the **Select** column, check the box associated with Session ID **00:00:00:00:00:00:2**.
- 9 Click **Teardown Selected Sessions**. The system tears down the BFS and OSM sessions.
- 10 On the DNCS Control window, highlight the **osm** process.

- 11 Click **Process** and then select **Start Process**. In a few minutes, the indicator for the osm process changes from red to green.
- 12 After the indicator for the osm process has turned green, highlight the **bfsServer** process.
- 13 Click **Process** and then select **Start Process**. In a few minutes, the indicator for the bfsServer process changes from red to green.
- 14 Press the **Options** button on the front panel of the BFS QAM until the **Session Count** total appears.
- 15 Wait about 10 minutes for the system to rebuild the sessions.
- 16 Does the **Session Count** total now equal the number of sessions you recorded in the *Check and Remove Sessions* (on page 23) procedure?
  - If **yes**, go to *Authorize the BRF as a BFS Server (Optional)* (on page 67). The system recovered all of the BFS sessions.
  - If **no**, call Cisco Services for assistance.

# Authorize the BRF as a BFS Server (Optional)


## Introduction

In systems that use a DOCSIS® return path for DHCT communications, there is no support in the cable modem termination system (CMTS) for the downstream channel descriptor (DCD). These systems need a Bridge Resolution File (BRF) to use as a BFS server in order to enable DHCTs to discover their hub ID and MAC layer multicast address. After an upgrade, the system does not automatically authorize the creation of the BRF as a BFS server; you must authorize the file creation manually. Follow these instructions to inspect the BFS GUIs for the presence of the BRF and then to authorize the file, if necessary.

## Authorizing the BRF

Follow these instructions to check for the BRF and then to authorize the file, if necessary.


- 1 From the DNCS Administrative Console, select the **Application Interface Modules** tab.
- 2 Is your site running Regional Network Control System (RNCS)?
  - a If **yes**, click **BFS Admin**. The BFS Admin Sites window opens.

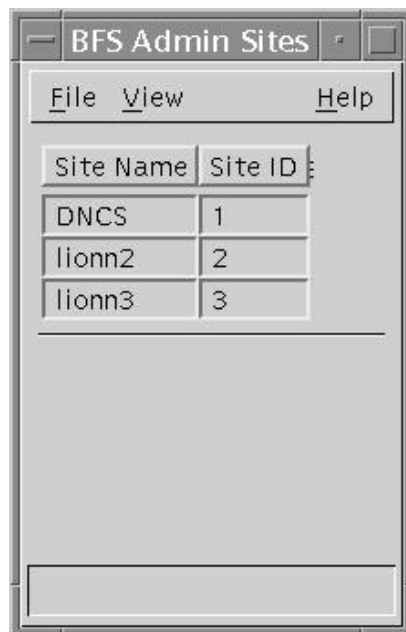


- b If **no**, go to step 3.

3 Double-click **DNCS**.

**Note:** This procedure does not apply to remote sites. The Site DNCS BFS Administration window appears.

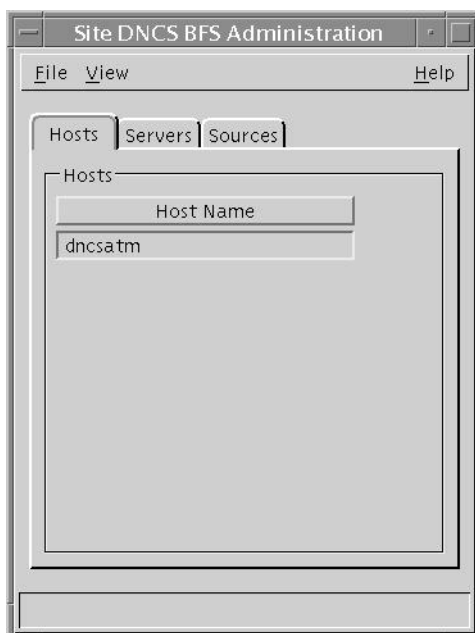

4 Click the **Servers** tab. A list of servers appears.

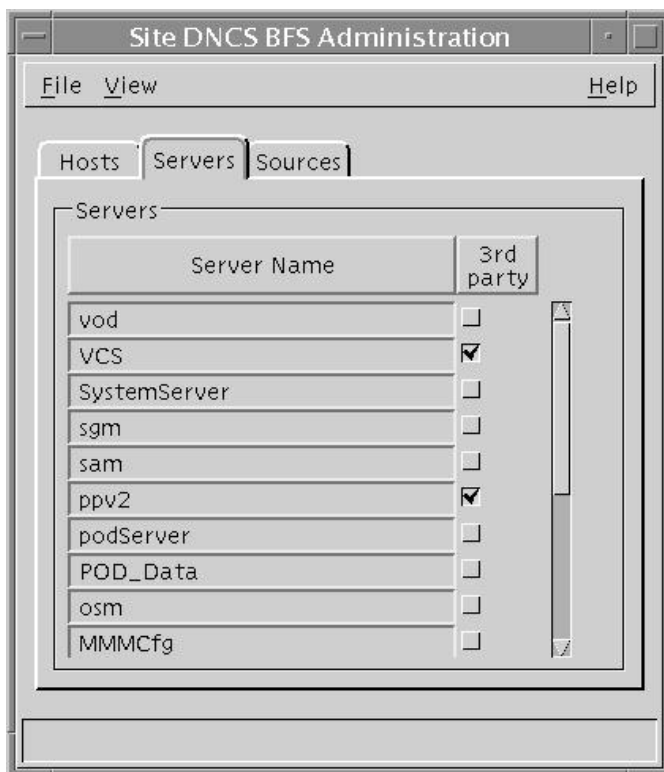



- 5 Does **brf** appear in the **Server Name** column?

**Note:** Use the scroll bar to see the entire list.

- If **yes**, click **File** and then select **Close** to close the Site DNCS BFS Administration window. Skip the rest of this procedure and go to *Final System Validation Tests* (on page 70).

**Note:** The BRF is already authorized as a BFS server.


- If **no**, go to step 6.

- 6 Click **File** and then select **New**. The Authorize BFS Server window appears.

- 7 Follow these instructions to configure the Authorize BFS Server window.

- a Type **brf** in the **Server Name** text box.
- b In the **Available Sources** column, highlight **Out of Band** and then click **Add**. The Out of Band source moves to the **Selected Sources** column.

**Example:** The Authorize BFS Server window should look similar to the following example when you are finished.

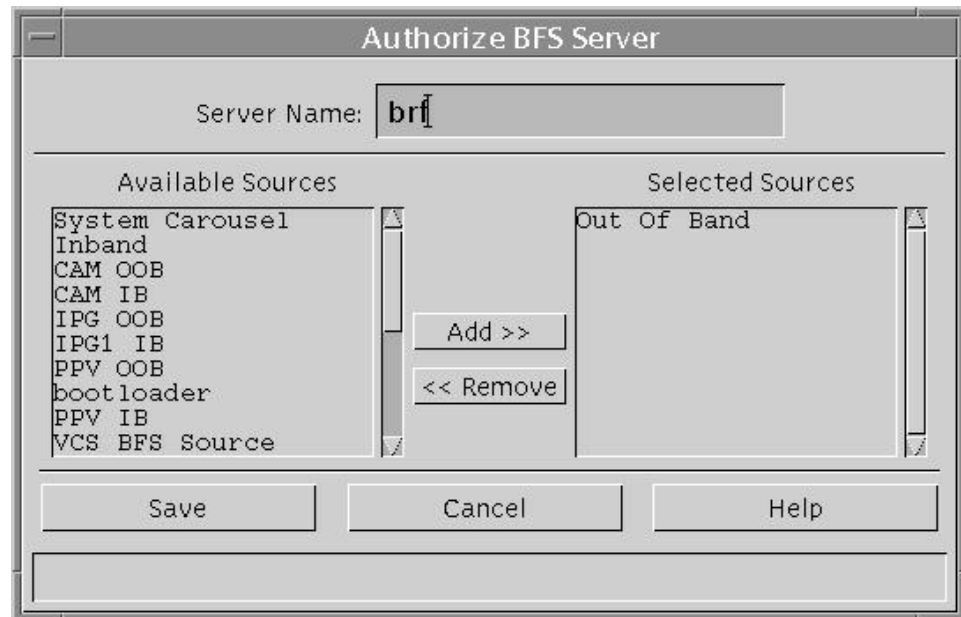

- 8 Click **Save**. The system saves the newly authorized BRF.
- 9 Click **File** and then select **Close** to close the Authorize BFS Server window.
- 10 Go to *Final System Validation Tests* (on page 70).

## Final System Validation Tests

### Verifying a Successful Installation of SR 2.5/3.5 SP1

Follow these instructions to verify a successful installation of this software. The DHCTs that you use for these tests should comply with the following specifications:

- Unauthorized to view a PPV event without specifically buying the PPV event
- Capable of booting into two-way mode
- Authorized for all third-party applications

**Important!** Note the following important points about these tests:

- These tests apply only to systems running SARA. Check with Aptiv for equivalent tests if your system supports the Passport application.
- If any of these tests are unsuccessful, contact Cisco Services before rolling back from this upgrade.

1 Complete these steps to perform a slow boot and a fast boot on a DHCT with a working return path (2-way mode).

a Boot a DHCT.

**Note:** Do *not* press the Power button.

b Access the Power On Self Test and Boot Status Diagnostic Screen on the DHCT and verify that all parameters, except UNcfg, display **Ready**.

**Note:** UNcfg displays Broadcast.

c Wait 5 minutes.

d Press the power button on the DHCT. Power to the DHCT is turned on.

e Access the Power On Self Test and Boot Status Diagnostic Screen on the DHCT.

f Do all of the parameters, including UNcfg, display **Ready**?

- If **yes**, go to step 2.
- If **no**, contact Cisco Services.

2 Ping a test DHCT.

3 Did the DHCT receive the ping?

- If **yes**, go to step 4.
- If **no**, call Cisco Services.

4 Stage at least one new DHCT to the system operator's specifications.

- 5 After staging, did the DHCT successfully load the current client release software?
  - If **yes**, go to step 6.
  - If **no**, call Cisco Services for assistance.
- 6 Did the DHCT receive at least 33 EMMs (Entitlement Management Messages) and successfully receive its Entitlement Agent?
  - If **yes**, go to step 7.
  - If **no**, call Cisco Services for assistance.
- 7 Does the IPG display 7 days of valid and accurate data?
  - If **yes**, go to step 8.
  - If **no**, call Cisco Services for assistance.
- 8 Do the PPV barkers appear on the PPV channels correctly?
  - If **yes**, go to step 8.
  - If **no**, call Cisco Services for assistance.
- 9 Do third-party applications load and run properly?
  - If **yes**, go to step 10.
  - If **no**, call Cisco Services for assistance.
- 10 Can test DHCTs buy a video-on-demand and/or an xOD program?
  - If **yes**, go to step 11.
  - If **no**, call Cisco Services for assistance.
- 11 Boot a DHCT and look at Statuses and Network Parameter Diagnostic Screen. Is the Hub Id number displayed?
  - If **yes**, the BRF is successfully authorized and you have completed the upgrade.
  - If **no**, call Cisco Services for assistance.

## Reset the Modulators

### Resetting the Modulators

SR 2.5/3.5 SP1 installs QAM 2.4, MQAM 2.5, GQAM 1.2, and QPSK version C81 software onto your system. Follow the instructions in the following documents to reset the modulators that do not already have these software versions:

- *QAM Modulator Software Version 2.4 Release Notes and Installation Instructions* (part number 4003389, published January 2006)
- *MQAM Modulator Software Version 2.5.0 Release Notes and Installation Instructions* (part number 4011045, published September 2005)
- *GQAM Software Version 1.2 Release Notes and Installation Instructions* (part number 4012452, published December 2005)
- *QPSK (Release C81) Software Upgrade and Installation Instructions* (part number 4012762, published March 2006)

After resetting the modulators, go to ***Reinstall the NMI Software*** (on page 73).

## Reinstall the NMI Software

### Reinstalling the NMI Software

If you removed the NMI software prior to the installation of SR 2.5/3.5 SP1, you need to reinstall the NMI software now. To reinstall the NMI software, refer to *DBDS Alarm Manager 1.0 Installation Instructions* and follow the **Install the NMI Software Directly Onto the DNCS** procedure.

## Re-Enable the Disk Mirroring Function

### Introduction

In *Detach Disk Mirroring on the DNCS* (on page 35), you detached the mirroring function of the Enterprise 450 or Sun Fire V880 DNCS. If your system upgrade appears successful, wait a day to verify that the Enterprise 450 or Sun Fire V880 DNCS functions properly with the new software. Then, re-enable the disk mirroring function of the DNCS so that the DNCS can continue storing identical information across several sets of hard drives.

**Important!** If your upgrade is unsuccessful, refer to *System Release Rollback Procedures* (on page 79).

### Re-Enabling the Disk Mirroring Function

Follow these instructions to re-enable the disk mirroring function of the Enterprise 450 or Sun Fire V880 DNCS.

**Important!** Before following these instructions, wait at least 24 hours after the upgrade to verify that your DNCS operates properly with the new software.

- 1 From an xterm window on the DNCS, type **su** and then press **Enter**. The **password** prompt appears.
- 2 Type the root password and then press **Enter**. You have root permissions in the xterm window.
- 3 Insert the **DBDS Maintenance CD** into the cdrom drive of the DNCS.
- 4 Type **/cdrom/cdrom0/s3/backup\_restore/mirrState -a** and then press **Enter**. The system displays the following message:  
**WARNING!!**  
**Proceeding beyond this point will ATTACH all Controller 2 submirrors.**  
**Are you certain you want to proceed?**
- 5 Type **y** and then press **Enter**. The system enables the disk mirroring functions on the DNCS.

**Note:** Depending upon your system configuration, it may take up to an hour to mirror all of the data on the mirrored disks.

## Monitoring the Disk-Mirroring Process

The syncwait utility allows engineers to monitor the progress of the disk mirroring process. Follow these instructions to run the syncwait utility.

**Note:** To examine the complete documentation on the syncwait utility, refer to the **Monitor Submirror Synchronization with the syncwait Utility** chapter in the *CoolTools Utilities User's Guide*.

- 1 Open another xterm window on the DNCS.
- 2 Type **syncwait.ksh** and then press **Enter**. The system displays a message stating the percentage of the mirror-synchronization process that is complete.

### Example:

The following example shows two mirrored disk sets: d503 and d506. The submirrors associated with d503 are 2 percent synchronized. The submirrors associated with d506 are 43 percent synchronized.

**Note:** The syncwait utility updates the display every 20 seconds.

```

xterm
Disks Syncing... Please wait.
d503: Mirror
  Submirror 0: d703
    State: Resyncing
  Submirror 1: d403
    Resync in progress: 2 % done
d506: Mirror
  Submirror 0: d706
    State: Resyncing
  Submirror 1: d406
    Resync in progress: 43 % done
d507: Mirror
  Submirror 1: d407
  Submirror 2: d707
d510: Mirror
  Submirror 1: d410
  Submirror 2: d710
d504: Mirror
  Submirror 0: d404
  Submirror 1: d704
d511: Mirror
  Submirror 0: d411
  Submirror 1: d711
d500: Mirror
  Submirror 1: d400
  Submirror 2: d700
d501: Mirror
  Submirror 1: d401
  Submirror 2: d701
d513: Mirror
  Submirror 1: d413
  Submirror 2: d713
d514: Mirror
  Submirror 1: d414
  Submirror 2: d714
d515: Mirror
  Submirror 1: d415
  Submirror 2: d715
d516: Mirror
  Submirror 1: d416
  Submirror 2: d716
d517: Mirror
  Submirror 1: d417
  Submirror 2: d717
d530: Mirror
  Submirror 0: d430
  Submirror 1: d730
d531: Mirror
  Submirror 0: d431
  Submirror 1: d731
d533: Mirror
  Submirror 0: d433
  Submirror 1: d733
d534: Mirror
  Submirror 0: d434
  Submirror 1: d734
d537: Mirror
  Submirror 0: d437
  Submirror 1: d737
ACS

```

- 3 When the system displays the following message, the disk mirroring process is complete; type **n** (for no) and then press **Enter**. The syncwait utility exits.

**No Resync in progress ...  
Continue monitoring status?**

- 4 Type **metastat | more** and then press **Enter**. The system displays the status of all of the metadevices on the DNCS.  
**Note:** Press the **Spacebar**, if necessary, to page through all of the output.
- 5 Examine the output from the **metastat** command for the following two conditions, and then go to step 6:
  - The designation **ok** appears in the **State** column next to each metadevice.
  - **No Hot Spare** indicates **In Use**.
- 6 Are *both* of the conditions described in step 5 true?
  - If **yes** (to both conditions), go to step 7; disk mirroring was successfully enabled.
  - If **no** (to either or both conditions), call Cisco Services for help in resolving the issues with disk mirroring.
- 7 In the xterm window from which you ran the **mirrstate -a** command, type **eject cdrom** and then press **Enter**. The system ejects the DBDS Maintenance CD.
- 8 Type **exit** and then press **Enter** to close the xterm window.



# 5

---

## Customer Information

### **If You Have Questions**

If you have technical questions, call Cisco Services for assistance. Follow the menu options to speak with a service engineer.

Access your company's extranet site to view or order additional technical publications. For accessing instructions, contact the representative who handles your account. Check your extranet site often as the information is updated frequently.



# A

## System Release Rollback Procedures

### Introduction

This appendix contains two procedures for rolling back the DNCS, based on the type of DNCS that is located at the site. Cisco field service engineers, who encounter problems while upgrading an existing digital system to this system release, should select the appropriate procedure:

- **Roll Back the Enterprise 450 or Sun Fire V880 DNCS**
- **Roll Back the Enterprise 250 DNCS**

Prior to executing these rollback procedures, contact Cisco Services.

### In This Appendix

- Roll Back the Enterprise 450 or Sun Fire V880 DNCS ..... 80
- Roll Back the Enterprise 250 DNCS..... 83

# Roll Back the Enterprise 450 or Sun Fire V880 DNCS

## Introduction

If your upgrade is unsuccessful, you may need to use the procedures in this section to restore your system to its condition prior to the upgrade and then to reattach disk mirroring on the DNCS.

**Important!** Be sure to notify Cisco Services before concluding that an upgrade has failed and before following any of the procedures in this section. In many cases, Cisco Services can help you easily resolve the problems related to the failed upgrade. In addition, the procedures in this section apply only if you have not yet completed *the Re-Enable the Disk Mirroring Function* (on page 74). If you have already enabled disk-mirroring on the DNCS, you will have to restore your system using your latest file system and database backup tapes.

## Rolling Back the DNCS

Follow these instructions to roll back the DNCS from an unsuccessful upgrade to your previous DNCS release.

**Note:** You need to be at the CDE Login window to begin this procedure. If you are unable to get to the CDE Login window, call Cisco Services for assistance.

- 1 In *Stop System Components* (on page 30), use these procedures, if necessary.
  - a *Stopping Spectrum* (on page 30)
  - b *Stopping the Application Server* (on page 31)
  - c *Stopping the DNCS* (on page 32)
- 2 From an xterm window on the Application Server, type **shutdown -g0 -y -i0** and then press **Enter**. The system halts all processes on the Application Server and an **ok** prompt appears.
- 3 Insert the CD labeled **DBDS Maintenance CD** into the CD drive of the DNCS.
- 4 Log in to the DNCS as **root** user.
- 5 Open an xterm window on the DNCS.

**Note:** You will have root permissions in the xterm window.
- 6 Type **/cdrom/cdrom0/s3/backup\_restore/make\_d700\_bootable** and then press **Enter**. A message appears that seeks confirmation to make bootable the disk device that contains the old software.
- 7 Type **y** and then press **Enter**. A message appears that seeks permission to reboot the server.

- 8 Type **y** and then press **Enter**. The DNCS reboots.
- 9 Log in to the DNCS as **root** user.
- 10 Open an xterm window on the DNCS.  
**Note:** You have root permissions in the xterm window.
- 11 Type **pkginfo -l SAIdnccs** and then press **Enter**. The system displays the version of software now running on the DNCS.
- 12 Is the version of software running on the DNCS version 4.0.0.27x?
  - If **yes**, continue the rollback by going to step 13; the DNCS successfully rebooted with the old software in place.
  - If **no**, call Cisco Services for help in determining why the DNCS failed to reboot with the old software in place.
- 13 Type **/cdrom/cdrom0/s3/backup\_restore/make\_d500\_bootable** and then press **Enter**. A message appears that seeks confirmation to make bootable the disk device that contains the old software.
- 14 Type **y** and then press **Enter**.  
**Results:**
  - The make\_d500\_bootable script reconfigures the mirrored disks on the DNCS.
  - A message appears that seeks permission to reboot the server
- 15 Type **y** and then press **Enter**. The DNCS reboots.
- 16 Log in to the DNCS as **root** user.
- 17 Open an xterm window on the DNCS.  
**Note:** You will have root permissions in the xterm window.
- 18 Type **/cdrom/cdrom0/s3/backup\_restore/mirrState -a** and then press **Enter**. The system displays the following message:  
**WARNING!**  
**Proceeding beyond this point will ATTACH all d7xx submirrors.**  
**Are you certain you want to proceed?**
- 19 Type **y** and then press **Enter**. The system enables the disk mirroring functions on the DNCS.  
**Note:** Depending upon your system configuration, it may take up to an hour for all of the data to become mirrored.
- 20 Type **eject cdrom** and then press **Enter**. The system ejects the CD.
- 21 Type **exit** and then press **Enter**. The xterm window closes.

## Appendix A

### System Release Rollback Procedures

- 22 Click **EXIT** on the toolbar to log out of the DNCS.
- 23 Log in to the DNCS as **dncs** user.
- 24 At the ok prompt on the Application Server, type **boot** and then press **Enter** and the Application Server reboots.
- 25 Log on to the Application Server as **dncs** user.
- 26 Follow the procedures in the *Restart the System Components* (on page 53).

# Roll Back the Enterprise 250 DNCS

## Introduction

Use the procedures in this section to roll back the Enterprise 250 DNCS from an unsuccessful upgrade to your previous DNCS release.

**Important!** Be sure to notify Cisco Services before concluding that an upgrade has failed and before following any of the procedures in this section. In many cases, Cisco Services can help you easily resolve the problems related to the failed upgrade.

## Rolling Back the Enterprise 250 DNCS

Follow these instructions to prepare to restore the file system of the Enterprise 250 DNCS.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Type **su -** and then press **Enter** to log in as root user. The password prompt appears.
- 3 Type the root password and then press **Enter**.
- 4 Insert the CD labeled **DBDS Maintenance CD** into the CD drive of the DNCS.
- 5 In *Stop System Components* (on page 30), use these procedures, if necessary.
  - a *Stopping Spectrum* (on page 30)
  - b *Stopping the Application Server* (on page 31)
  - c *Stopping the DNCS* (on page 32)
- 6 From an xterm window on the Application Server, type **shutdown -g0 -y -i0** and then press **Enter**. The system halts all processes on the Application Server and an **ok** prompt appears.
- 7 Type **shutdown -g0 -y -i0** and then press **Enter**. The system halts all processes on the DNCS and an **ok** prompt appears.
- 8 At the **ok** prompt, type **boot cdrom - SAsheIl** and then press **Enter**.

### Results:

- The DNCS boots from the CD.
  - An xterm window opens.
- 9 Insert your most recent DNCS file system backup tape into the tape drive of the DNCS.
  - 10 Go to *Restoring the DNCS File System* (on page 84).

## Restoring the DNCS File System

Follow these instructions to restore the file system of the Enterprise 250 DNCS.

- 1 Type **/tmp/cdrom/backup\_restore/restoreFileSystems** and then press **Enter**. The system restores the DNCS or Application Server file system and displays a message when the restoration is complete.
- 2 When the restoration is complete, remove the tape and store it in a safe place.
- 3 Type **/usr/sbin/shutdown -y -i0 -i6** and then press **Enter**. The DNCS reboots and the Common Desktop Environment (CDE) login window appears.
- 4 Log on to the DNCS as **dncs** user.
- 5 At the **ok** prompt on the Application Server, type **boot** and then press **Enter**. The Application Server reboots.
- 6 Log on to the Application Server as **dncs** user.
- 7 Follow the procedures in the *Restart the System Components* (on page 53).



# B

## How to Determine the Tape Drive Device Name

### Introduction

Chapter 2 of this guide requires that you back up the DNCS file system and database before upgrading the system. The procedure to back up these files requires that you know the device name of the tape drive of the DNCS.

If you are unsure of the device name of the tape drive in the DNCS or simply wish to confirm the device name, the procedure in this appendix will help you determine the device name.

### In This Appendix

- Determine the Tape Drive Device Name ..... 86

## Determine the Tape Drive Device Name

### Determining the Tape Drive Device Name

Use this procedure if you need to determine the device name of the tape drive used by your DNCS.


**Notes:**

- You will only have to complete this procedure once. The device name of your tape drive will not change unless you specifically change the tape drive configuration.
  - Do not have a tape in the tape drive when you complete this procedure.
- 1 If necessary, open an xterm window on the DNCS.
  - 2 Ensure that no tape is currently in your tape drive.
  - 3 Type the following UNIX routine. The system checks the status of eight possible tape drive configurations and displays the results.

**Important!** Type the routine just as shown by pressing **Enter** at the end of each line.

```
For drive in 0 1 2 3 4 5 6 7
do
mt -f /dev/rmt/$drive status
done
```

**Note:** Your system will display results similar to the following example.



```
xterm
$ for drive in 0 1 2 3 4 5 6 7
> do
> mt -f /dev/rmt/$drive status
> done
/dev/rmt/0: no tape loaded or drive offline
/dev/rmt/1: No such file or directory
/dev/rmt/2: No such file or directory
/dev/rmt/3: No such file or directory
/dev/rmt/4: No such file or directory
/dev/rmt/5: No such file or directory
/dev/rmt/6: No such file or directory
/dev/rmt/7: No such file or directory
$
```

- 4 Examine your results and use the following observations, based upon the example used in step 3, to determine the device name of your tape drive.
  - In the example in step 3, no tape drives are detected in /dev/rmt/1 through /dev/rmt/7 (as indicated by **No such file or directory**). Therefore, you can conclude that /dev/rmt/1 through /dev/rmt/7 are not valid device names for tape drives on the system queried in step 3.
  - In the example in step 3, a tape drive is detected in /dev/rmt/0 and the system accurately notes that no tape is loaded. Therefore, you can conclude that the device name of the tape drive on the system queried in step 3 is /dev/rmt/0.
  - If /dev/rmt/1 is the device name of your tape drive, then **no tape loaded or drive offline** would appear next to /dev/rmt/1.
- 5 Write the device name of your tape drive in the space provided.  

---





# Direct ASI Installation and Configuration Procedures

## Introduction

To reduce network infrastructure complexity, Cisco has removed the requirement for a Broadband Integrated Gateway (BIG) to transmit Broadcast File System (BFS) data to QAMs. The BFS now produces a full transport stream, and no longer feeds an MPEG stream to the BIG for further processing and multiplexing.

The DNCS is now configurable so that inband data can be transmitted through the current asynchronous transfer mode (ATM) interface or through a new asynchronous serial interface (ASI). This appendix provides instructions for installing and configuring the ASI.

## In This Appendix

■ Check for the Existence of the ASI Package .....	91
■ Enable the ASI Feature .....	92
■ Stop the System Components .....	93
■ Install the ASI Card .....	96
■ Install the ASI Package.....	98
■ Configure the ASI Card .....	99
■ Check the Status of the ASI Card .....	100
■ Restart System Components .....	101
■ Record Configuration Data .....	105
■ Create an MPEG Source .....	108
■ Set Up the QAM.....	111
■ Set Up the BFS Host.....	114
■ Set the BIG Offline .....	117
■ Stop the BFS and OSM Processes .....	118
■ Tear Down BFS Sessions .....	121
■ Clear Completed, Pending, or Failed Sessions .....	122
■ Enable the System for ASI .....	123
■ Restart the BFS and OSM Processes .....	125
■ Checkout Procedures for the ASI Card .....	127

## Check for the Existence of the ASI Package

### Checking for the Existence of the ASI Package on the DNCS

Before installing the ASI card, determine whether the ASI package currently exists on the DNCS. If it currently exists on the DNCS, you will have to remove it because a new ASI package cannot successfully install over an existing ASI package. Follow these instructions to check for the ASI package and then to remove it, if necessary.

#### Notes:

- Be sure that you have the CD containing the old ASI package before deleting the package from the DNCS. You may need the old software should you ever have to roll back from an unsuccessful upgrade.
  - Normally, systems without an ASI card should not have an ASI package.
- 1 If necessary, open an xterm window on the DNCS.
  - 2 Type **pkginfo -l SAIasi** and then press **Enter**. The system displays information about the ASI package, if it exists.
  - 3 After completing step 2, did the ASI package exist on the DNCS?
    - If **yes**, go to step 4 to begin removing the package.
    - If **no**, go to *Enable the ASI Feature* (on page 92).
  - 4 Follow these instructions to log on to the xterm window as root user.
    - a Type **su -** and then press **Enter**. The password prompt appears.
    - b Type the root password and then press **Enter**.
  - 5 Type **pkgrm SAIasi** and then press **Enter**. The system removes the ASI package from the DNCS.
  - 6 Go to *Enable the ASI Feature* (on page 92).

## Enable the ASI Feature

### Enabling the ASI Feature

After removing the ASI package from the DNCS, contact Cisco Services. Engineers at Cisco Services will enable the Direct ASI feature.




# Stop the System Components

## Introduction

Use the procedures in this section to stop Spectrum, the Application Server, and the DNCS.

## Stopping Spectrum

- 1 From the DNCS Administrative Console Status window, click **Control** in the NMS section of the window. The Select Host to run on window appears.
- 2 From the Select Host to run on window, click **OK**. The Spectrum Control Panel appears.

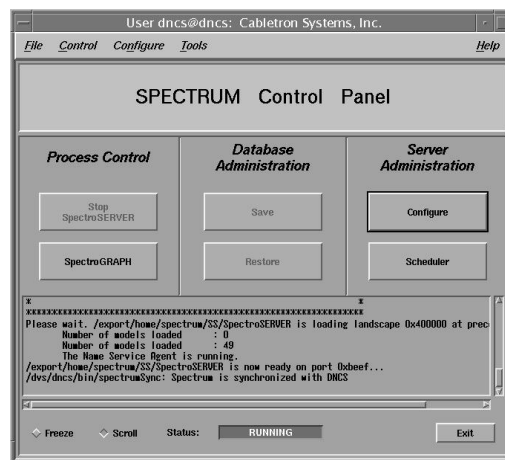

- 3 Click **Stop SpectroSERVER**. A confirmation message appears.
- 4 Click **OK** at the confirmation message. The Status message on the Spectrum Control Panel shows **Inactive**.
- 5 Click **Exit** on the Spectrum Control Panel. A confirmation message appears.
- 6 Click **OK** at the confirmation message. The Spectrum Control Panel closes.

## Stopping the Application Server

Choose one of the following procedures based upon the resident application that runs on your system:

- For sites that support the Cisco Resident Application, follow the instructions in **Stopping the Application Server at SARA Sites**.
- For sites that support the Aptiv resident application, follow the instructions in **Stopping the Application Server at Aptiv Sites**.

### Stopping the Application Server at SARA Sites

Complete these steps to stop the Application Server at sites that support the Cisco resident application.

- 1 Press the middle mouse button on the Application Server and select **App Serv Stop**.
- 2 From an xterm window on the Application Server, type **appControl** and then press **Enter**. The Applications Control window appears.
- 3 Type **2** (for Startup/Shutdown Single Element Group), and then press **Enter**. The system displays all Application Server processes.  
**Note:** The system updates the display periodically, or you can press **Enter** to force an update.
- 4 When the **Curr Stt** (Current State) field of the Applications Control window indicates that all of the Application Server processes have stopped, follow the on-screen instructions to close the Applications Control window.

### Shutting Down the Cisco Application Server

After stopping the Cisco Application Server, follow these steps to stop the Application Server.

- 1 Log on to an xterm window on the Application Server as **root** user.
- 2 Type **/usr/sbin/shutdown -i0 -g0 -y** and then press **Enter**. The Application Server shuts down and the ok prompt appears.
- 3 Go to *Stopping the DNCS* (on page 32).

### Stopping the Application Server at Aptiv Sites

Complete these steps to stop the Application Server at sites that support the Aptiv resident application.

- 1 Press the middle mouse button on the Application Server and select **Passport Stop**.
- 2 From an xterm window on the Application Server, type **CheckServices** and then press **Enter**. A list of drivers appears.

**Note:** Each driver is associated with an Application Server process.

- 3 Wait until the word **No** appears next to each driver.
- 4 Log in to an xterm window as **root** user.
- 5 Type **init 0** and then press **Enter**. The Application Server shuts down and an ok prompt appears.
- 6 Go to *Stopping the DNCS* (on page 32).

## Stopping the DNCS

- 1 At the DNCS, press the middle mouse button and then select **DNCS Stop**.
- 2 From an xterm window on the DNCS, type **dncsControl** and then press **Enter**. The DnCS Control window appears.
- 3 Type **2** (for Startup/Shutdown Single Element Group), and then press **Enter**. The system displays all DNCS processes.

**Note:** The system updates the display periodically, or you can press **Enter** to force an update.

- 4 When the **Curr Stt** (Current State) field of the DnCS Control window indicates that all of the DNCS processes have stopped, follow the on-screen instructions to close the DnCS Control window.

## Install the ASI Card

### Installing the ASI Card

The Common Download feature requires that a special card be installed in the DNCS. Sites that support both the Direct ASI feature, as well as the Common Download feature, may find it convenient to install the Common Download card at the same time that the Direct ASI card is installed. For this reason, information pertaining to the Common Download card is included in step 4.

After deleting (if necessary) the ASI package from the DNCS, follow the instructions in this section to install the ASI card.

- 1 Follow these instructions, if necessary, to log in to the xterm window as root user.  
**Note:** If you had to remove the ASI package in the previous procedure, you should already be root user.
  - a Type **su -** and then press **Enter**. The **password** prompt appears.
  - b Type the root password and then press **Enter**.
- 2 Type **shutdown -y -g0 -i0** and then press **Enter**. The DNCS shuts down and the ok prompt appears.
- 3 Turn off power to the DNCS.
- 4 Remove the cover to the DNCS and install the ASI card into one of the following slots:
  - For a Enterprise 250 DNCS, Slot 2
  - For a Enterprise 450 DNCS, Slot 5
  - For a Sun Fire V880 DNCS, Slot 7
- 5 Is your site upgrading to support the common download feature?
  - If **yes**, then install the common download card in the following slot:
    - For a Sun Fire V880 DNCS, Slot 2
    - For a Enterprise 450 DNCS, Slot 4
  - If **no**, go to step 6.
- 6 Put the cover back on the DNCS.
- 7 Turn on power to the DNCS.

- 8 Log on to the DNCS as **root** user.
- 9 Did the DNCS processes start after you turned on the power?
  - If **yes**, go to:
    - **Stopping the DNCS**
    - *Install the ASI Package* (on page 98)
  - If **no**, go to *Install the ASI Package* (on page 98).

## Install the ASI Package

### Installing the ASI Package

After installing the ASI card into the DNCS, follow these instructions to install the ASI package.

**Note:** If you have properly followed the instructions in the previous procedure, you should be logged on as root user to the DNCS.

- 1 Type **. /dvs/dnccs/bin/dnccsSetup** and then press **Enter**. The system establishes the root user environment.

**Important!** Be sure to type the dot followed by a space prior to typing /dvs.

- 2 Insert the CD labeled similarly to **SAIasi** into the cdrom drive of the DNCS.
- 3 Type **df -n** and then press **Enter**. A list of the mounted filesystems appears.

**Note:** The presence of /cdrom in the output confirms that the system correctly mounted the CD.

- 4 Type **cd /cdrom/cdrom0** and then press **Enter**.
- 5 Type **install\_pkg** and then press **Enter**. Software installs which prepares the DNCS for Direct ASI support.
- 6 Type **eject cd** and then press **Enter**. The CD ejects from the DNCS.
- 7 Go to *Configure the ASI Card* (on page 99).

## Configure the ASI Card

### Configuring the ASI Card

Now that you have installed the ASI package, follow these instructions to configure the ASI card.

- 1 Type **cd /dvs/dncs/bin** and then press **Enter**. The /dvs/dncs/bin directory becomes the working directory.
- 2 Type **./configureASI.pl** and then press **Enter**. If the configuration script detects a problem with how the card is configured, the script displays a message seeking confirmation to correct the problem.
- 3 Type **y** and then press **Enter**. The system modifies the configuration of the Direct ASI card and prompts you to reboot the computer.
- 4 Type **/usr/sbin/shutdown -g0 -i6 -y** and then press **Enter**. The DNCS reboots.
- 5 Log in to the DNCS as **dncs** user.
- 6 At the **ok** prompt on the Application Server, type **boot**.
- 7 Log in to the Application Server as **dncs** user.
- 8 Go to *Check the Status of the ASI Card* (on page 100).


## Check the Status of the ASI Card

### Checking the Status of the Direct ASI Card

After installing and configuring the ASI card and installing the ASI package, follow these instructions to test the status of the card.

- 1 Type **cd /opt/solHmux64** and then press **Enter**. The /opt/solHmux64 directory becomes the working directory.
- 2 Type **/vpStatus -d /dev/Hmux0 -P 0** and then press **Enter**. The system displays the status of the ASI card.

**Example:** Your results should look similar to, but not exactly like, the following example.

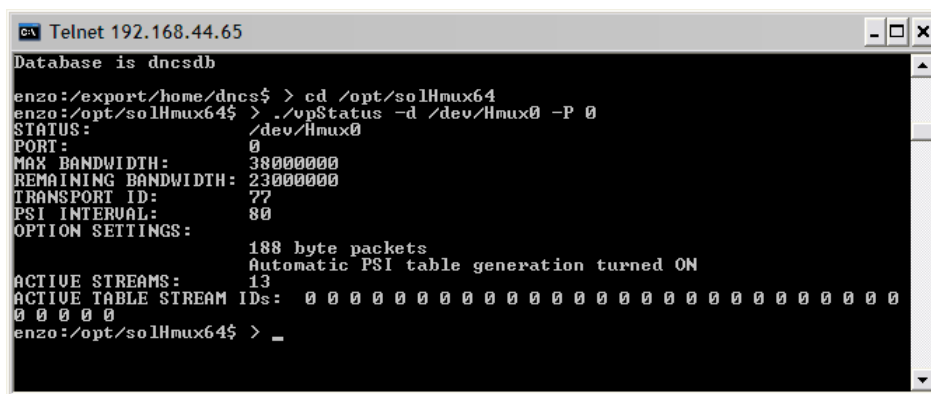

```

Telnet 192.168.44.65
Database is dnscdb
enzo:/export/home/dnscs$ > cd /opt/solHmux64
enzo:/opt/solHmux64$ > ./vpStatus -d /dev/Hmux0 -P 0
STATUS:
PORT:
MAX BANDWIDTH:
REMAINING BANDWIDTH:
TRANSPORT ID:
PSI INTERVAL:
OPTION SETTINGS:
ACTIVE STREAMS:
ACTIVE TABLE STREAM IDs:
0 0 0 0 0
enzo:/opt/solHmux64$ > _
```

The screenshot shows a Telnet window titled 'Telnet 192.168.44.65'. The user 'enzo' is logged in at the 'dnscs' host. The prompt is 'Database is dnscdb'. The user enters 'cd /opt/solHmux64' and then './vpStatus -d /dev/Hmux0 -P 0'. The output shows various status parameters: STATUS, PORT, MAX BANDWIDTH, REMAINING BANDWIDTH, TRANSPORT ID, PSI INTERVAL, OPTION SETTINGS (188 byte packets, Automatic PSI table generation turned ON), ACTIVE STREAMS (13), and ACTIVE TABLE STREAM IDs (a row of 13 zeros). The prompt returns to 'enzo:/opt/solHmux64\$'.

**Note:** An improperly installed ASI card will yield either no results or results that clearly show an error.

- 3 Do the results from step 2 show the ASI card to be properly installed?
  - If **yes**, go to *Restart System Components* (on page 101).
  - If **no**, call Cisco Services for assistance.



# Restart System Components


## Introduction

Use the procedures in this section to restart Spectrum, the DNCS, and the Application Server.

## Restarting Spectrum

**Note:** Skip this procedure if you are using Alarm Manager, instead of Spectrum.

- 1 From the DNCS Administrative Console Status window, click **Control** in the NMS section of the window. The Select Host to run on window opens.
- 2 Select the Host Machine (usually DEFAULT), and then click **OK**. The Spectrum Control Panel window opens.

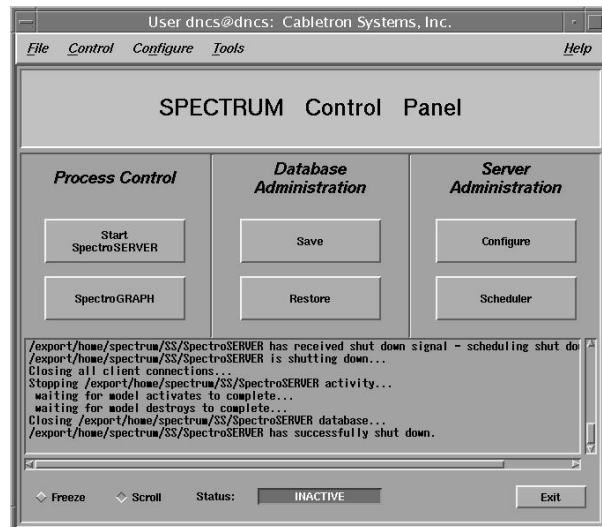

- 3 On the Spectrum Control Panel window, click **Start SpectroSERVER**. The Spectrum Network Management System starts.
- 4 On the Spectrum Control Panel window, click **Exit**. A confirmation message appears.
- 5 Click **OK** on the confirmation message. The Spectrum Control Panel window closes.

## Restarting the DNCS

- 1 Click the middle mouse button on the DNCS and select **DNCS Start**. The DNCS processes start.
- 2 Click the middle mouse button on the DNCS and select **Administrative Console**. The DNCS Administrative Console opens.
- 3 From the DNCS Administrative Console Status window, click **DNCS Monitor**.

### Results:

- The DNCS Monitor window opens.
  - Green indicators begin to replace red indicators on the DNCS Monitor window.
- 4 From an xterm window on the DNCS, type **dncsControl** and then press **Enter**. The DnCS Control window opens.
  - 5 Type **2** (for Startup / Shutdown Single Element Group) and then press **Enter**. The DnCS Control window updates to list the status of all of the processes and servers running on the DNCS.
  - 6 Wait for the DnCS Control window to list the current status (Curr Stt) of all the processes and servers as **running**.

### Notes:

- The DnCS Control window updates automatically every few seconds or you can press **Enter** to force an update.
- The indicators on the DNCS Control Monitor will all become green when the processes and servers have restarted.

## Restarting the Application Server

This section provides procedures for restarting either a SARA Server or an Aptiv Application Server. Choose the procedure that pertains to your system

### Restarting the Application Server for SARA Systems

Follow these instructions to check if the Cisco Resident Application has started on the Application Server, and then to start it, if necessary.

- 1 Open an xterm window on the Application Server.
- 2 Type **appControl** and then press **Enter**. The Applications Control window opens.
- 3 Select option **2** on the Applications Control window. The system displays a list of Application Server processes and their current status.
- 4 Does the word **running** appear next to the current state field (**Curr Stt**) of each process?
  - If **yes**, skip the rest of this procedure.
  - If **no**, go to step 5.
- 5 Press the middle mouse button, and then select **App Serv Start**.
- 6 When the Application Control window indicates that the current state (**Curr Stt**) of each process is running, go to step 7.
 

**Note:** On some systems, the VOD Server process may remain at **Stopped**; this is normal.
- 7 Follow the on-screen instructions to close the Applications Control window.

### Restarting the Application Server for Aptiv Systems

Follow these instructions to check if the Pioneer application has started on the Application Server, and then to start it, if necessary.

- 1 Open an xterm window on the Application Server.
- 2 Type **CheckServices** and then press **Enter**. A list of drivers appears.
 

**Note:** Each driver is associated with an Application Server process.

## Appendix C

### Direct ASI Installation and Configuration Procedures

- 3 Does the word **Yes** appear next to each driver?  
**Note:** The word **Yes** next to a driver indicates that the process has started.
  - If **yes**, skip the rest of this procedure.
  - If **no**, go to step 4.
- 4 Press the middle mouse button, and then select **Passport Start**.
- 5 When the word **Yes** appears next to each driver, go to step 6.
- 6 Follow the on-screen instructions to close the window containing the list of Pioneer drivers.


## Record Configuration Data

### Recording Configuration Details

After enabling the ASI feature on the DNCS, take a few minutes to record the BFS transport stream ID (TSID) and the QAM connection details regarding the Direct ASI card.

**Note:** This data may be useful for troubleshooting purposes later on.

- 1 From the DNCS Administrative Console, select the **Element Provisioning** tab.
- 2 Click **BIG**. The BIG List window opens.

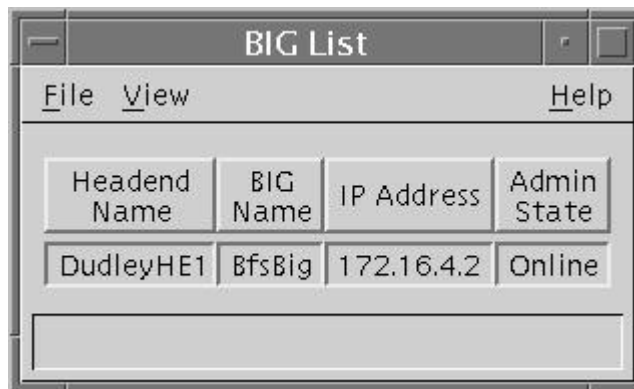

Headend Name	BIG Name	IP Address	Admin State
DudleyHE1	BfsBig	172.16.4.2	Online

- 3 Double-click the **BfsBig** entry. The Set Up BIG window opens.

## Appendix C

### Direct ASI Installation and Configuration Procedures

- 4 On a sheet of paper, record the **Output Transport Stream ID**.

**Note:** In this example, the Output Transport Stream ID value is 27.

Set Up BIG

BIG Cards Connectivity

BIG

Headend Name: **DudleyHE1**

BIG Name: **BfsBig**

Administrative State: ☐ Offline ☐ Online

Msync Control Card

Slot Number: **3**

IP Address: **172.16.4.2**

Physical Address: **00:02:DE:81:C8:D3**

Subnet Mask: **255.255.255.0**

Output Mode: ☐ SWIF ☒ ASI

Output Transport Stream ID: **27**

PAT Configuration

Save Apply Cancel Help

- 5 Click the **Connectivity** tab. The window updates to show connection data.
- 6 Click and drag the right border of the window to expand it.
- 7 Click **Show TSIDs / IPs**. The window updates to show additional connection detail.

Connectivity

BIG Name: **BFSbig**

Slot Number	Card Type	Ports
6		
5	OC3 ATM	<input checked="" type="checkbox"/> OC-3 IN
4		
3	Msync ASI	<input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6
2		
1		

Connect To:

Headend Name: **HE1**

Device Type: **QAM**

Device Name: **BFSqam**

Port Number: **1**

Diagram: ATM (0) -- (5, OC-3 IN) 0 -- 1 (3, 1) -- 1 -- BFSbig -- BFSqam

☒ Show TSIDs / IPs ☐ Show (slot, port)

Legend:

- ATM
- BIG
- MPEG Source
- IRD/IRT
- RF Combiner
- RTE
- SONET
- STA
- STA


- 8 Click the SWIF Transmit or Msync ASI port currently connected to the BFS QAM. In the **Connect To** area of the window, the system displays the **Headend Name, Device Type, Device Name, and Port Number**.
- 9 In the space provided, record the data displayed in step 8.  
**Headend Name:** \_\_\_\_\_  
**Device Type:** \_\_\_\_\_  
**Device Name:** \_\_\_\_\_  
**Port Number:** \_\_\_\_\_
- 10 Click **Cancel** to close the window.

## Create an MPEG Source

### Creating an MPEG Source

Your next step is to create an MPEG source. Follow these instructions to create an MPEG source.

- 1 From the DNCS Administrative Console, click the **Element Provisioning** tab and then select **MPEG Source**. The MPEG Source List window opens.

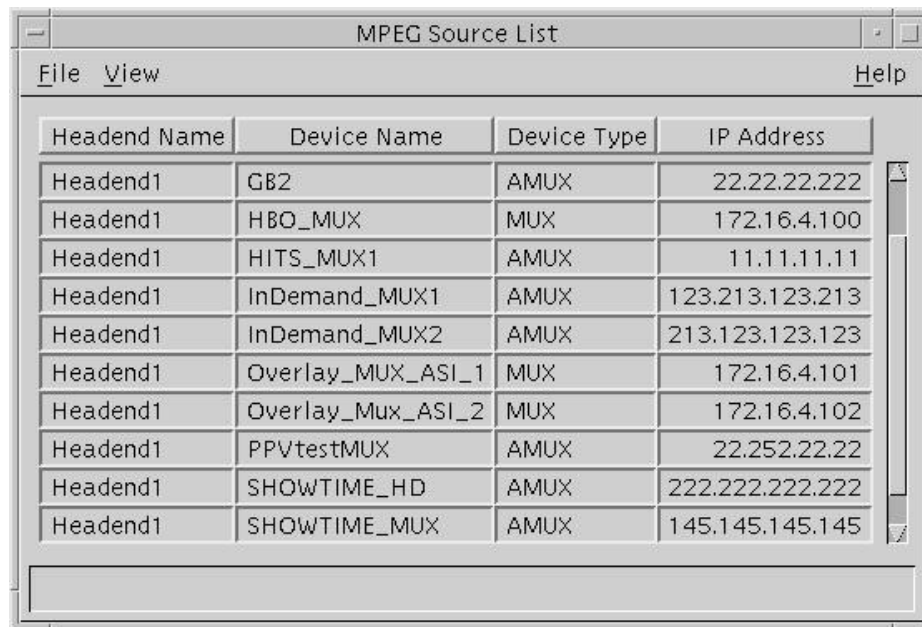

The screenshot shows a window titled "MPEG Source List" with a menu bar containing "File", "View", and "Help". Below the menu bar is a table with four columns: "Headend Name", "Device Name", "Device Type", and "IP Address". The table contains ten rows of data. A vertical scrollbar is visible on the right side of the table.

Headend Name	Device Name	Device Type	IP Address
Headend1	GB2	AMUX	22.22.22.222
Headend1	HBO_MUX	MUX	172.16.4.100
Headend1	HITS_MUX1	AMUX	11.11.11.11
Headend1	InDemand_MUX1	AMUX	123.213.123.213
Headend1	InDemand_MUX2	AMUX	213.123.123.123
Headend1	Overlay_MUX_ASI_1	MUX	172.16.4.101
Headend1	Overlay_Mux_ASI_2	MUX	172.16.4.102
Headend1	PPVtestMUX	AMUX	22.252.22.22
Headend1	SHOWTIME_HD	AMUX	222.222.222.222
Headend1	SHOWTIME_MUX	AMUX	145.145.145.145


- 2 Click **File** and then select **New**. The Set Up MPEG Source window opens.



- 3 Follow these instructions to configure the Set Up MPEG Source window.
  - a Click the arrow next to the Headend Name field and choose the appropriate headend.
  - b Type ASI\_BFS in the MPEG Source Name field.
  - c Type ASI in the Device Type field.
 

**Note:** If ASI is already configured, you can click the arrow next to the Device Type field and select **ASI**.
  - d Type any IP address and MAC address in the **IP Address** and **Physical Address** fields.

**Note:** The actual IP address and MAC address you use are not important.

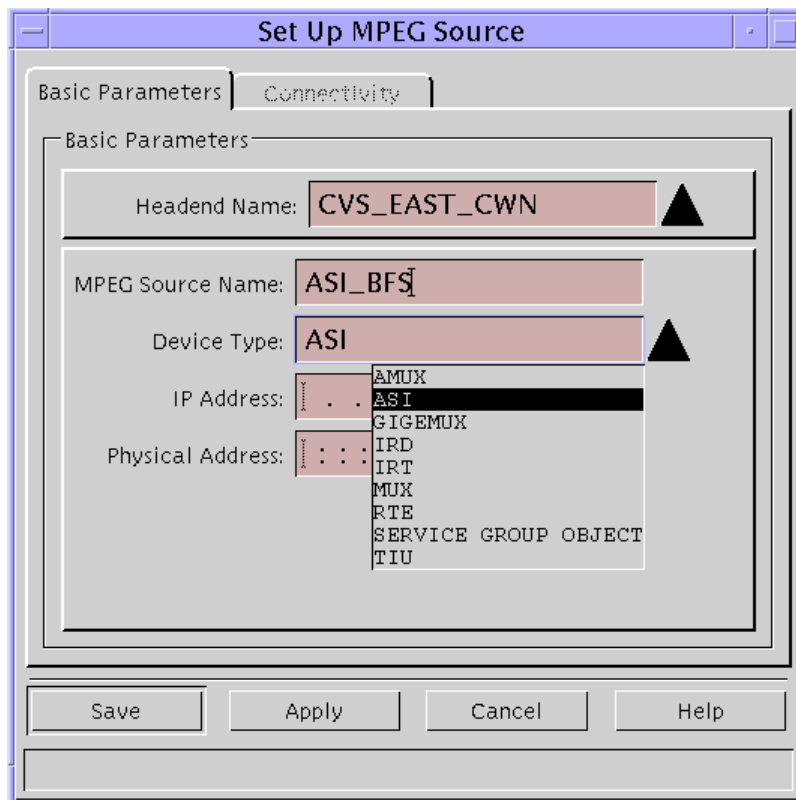

- e Click **Save**. The Connectivity tab becomes active.
- 4 Click the **Connectivity** tab on the Set Up MPEG Source window.
- 5 Click **Create Port**. The Port Number Prompt window opens.

## Appendix C

### Direct ASI Installation and Configuration Procedures


- 6 Follow these instructions to configure the Port Number Prompt window.
  - a In the **Output Port** field, type **0** (zero).
  - b In the **TSID** field, type a transport stream ID (TSID) that is equal to the input TSID for the BFS QAM.
  - c If the **Transport Protocol** field does not display **ASI**, click the arrow to the right of the field and select **ASI**.
  - d Click **OK**. The Set Up MPEG Source window reappears and the new configuration is saved.
- 7 Click **Close**. The Set Up MPEG Source window closes.
- 8 Go to *Set Up the QAM* (on page 111).

# Set Up the QAM

## Setting Up the QAM


After creating the MPEG source, follow these instructions to set up the QAM.

- 1 From the DNCS Administrative Console, click **Element Provisioning** and then select **QAM**. The QAM List window opens.

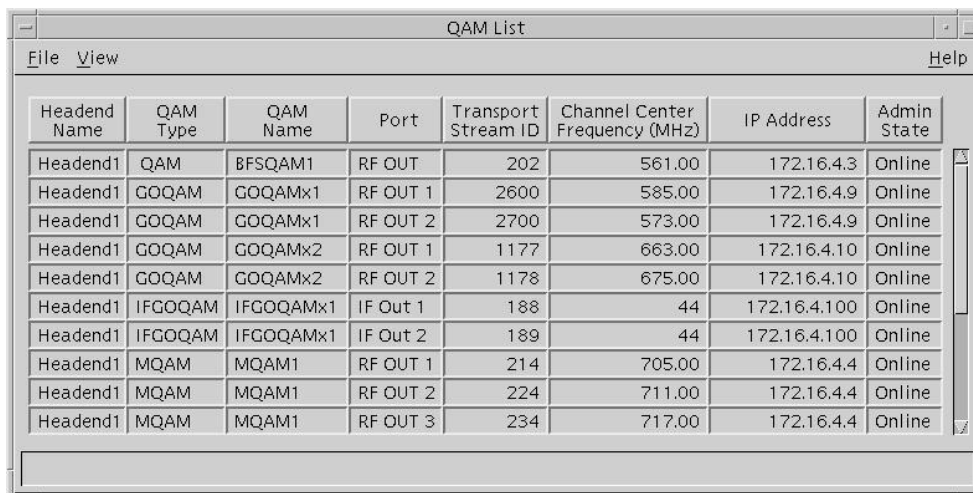

Headend Name	QAM Type	QAM Name	Port	Transport Stream ID	Channel Center Frequency (MHz)	IP Address	Admin State
Headend1	QAM	BFSQAM1	RF OUT	202	561.00	172.16.4.3	Online
Headend1	GOQAM	GOQAMx1	RF OUT 1	2600	585.00	172.16.4.9	Online
Headend1	GOQAM	GOQAMx1	RF OUT 2	2700	573.00	172.16.4.9	Online
Headend1	GOQAM	GOQAMx2	RF OUT 1	1177	663.00	172.16.4.10	Online
Headend1	GOQAM	GOQAMx2	RF OUT 2	1178	675.00	172.16.4.10	Online
Headend1	IFGOQAM	IFGOQAMx1	IF Out 1	188	44	172.16.4.100	Online
Headend1	IFGOQAM	IFGOQAMx1	IF Out 2	189	44	172.16.4.100	Online
Headend1	MQAM	MQAM1	RF OUT 1	214	705.00	172.16.4.4	Online
Headend1	MQAM	MQAM1	RF OUT 2	224	711.00	172.16.4.4	Online
Headend1	MQAM	MQAM1	RF OUT 3	234	717.00	172.16.4.4	Online

- 2 Double-click the **BFS QAM**. The Set Up QAM window opens.

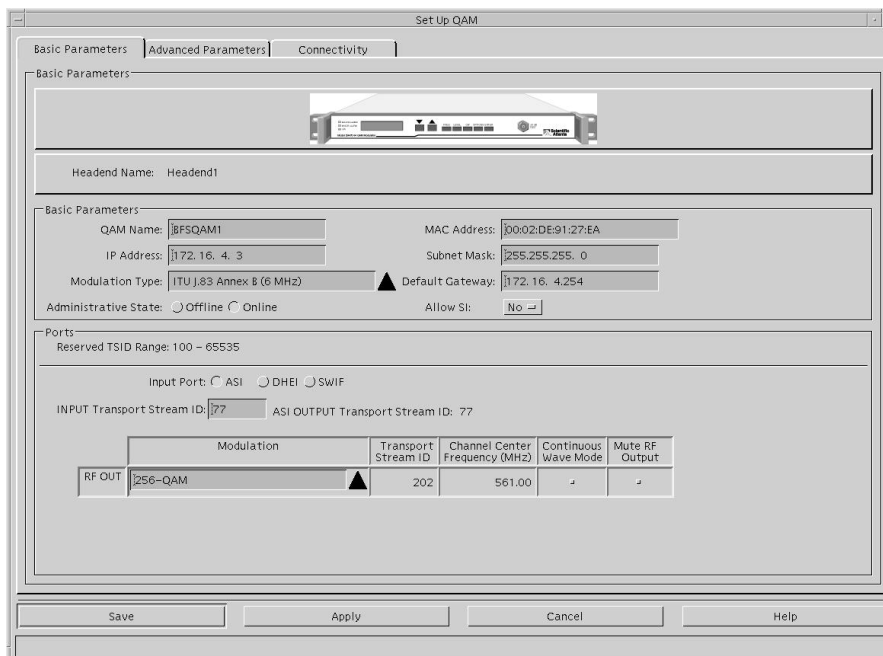

Set Up QAM

Basic Parameters | Advanced Parameters | Connectivity

Headend Name: Headend1

Basic Parameters:

QAM Name: BFSQAM1 MAC Address: 00:02:DE:91:27:EA

IP Address: 172.16.4.3 Subnet Mask: 255.255.255.0

Modulation Type: ITU J.83 Annex B (6 MHz) Default Gateway: 172.16.4.254

Administrative State: ☐ Offline ☒ Online Allow SI: No

Ports

Reserved TSID Range: 100 - 65535

Input Port: ☒ ASI ☐ DHEI ☐ SWIF

INPUT Transport Stream ID: 77 ASI OUTPUT Transport Stream ID: 77

	Modulation	Transport Stream ID	Channel Center Frequency (MHz)	Continuous Wave Mode	Mute RF Output
RF OUT	256-QAM	202	561.00		

Save Apply Cancel Help

- 3 On the Set Up QAM window, configure the **Input Port** field to **ASI**.
- 4 Configure the **INPUT Transport Stream ID** field with the same value that you recorded as the TSID on the Set Up MPEG Source window in a previous procedure, *Creating an MPEG Source* (on page 108).

## Appendix C

### Direct ASI Installation and Configuration Procedures

- 5 Click the **Connectivity** tab.
- 6 In the **Connect To** area of the window, click the arrow to the right of each of the following fields and set each field to **none**:
  - **Device Type**
  - **Device Name**
  - **Card Type**
  - **Slot Number**
  - **Port Number**


**Note:** The system requires that you first set these fields to none before you change the configuration.

- 7 Click **Save**.

**Important!** If the **Save** button is grayed out after completing step 7, close the Set Up QAM window. Then, double-click the BFS QAM from the QAM List window to gain access again to the Set Up QAM window.

- 8 Now, follow these instructions to configure the remainder of the Set Up QAM window.
  - a Click the arrow to the right of the **Headend Name** field and choose the appropriate headend.
  - b Click the arrow to the right of the **Device Type** field and choose the appropriate device (probably **ASI**).
  - c Click the arrow to the right of the **Device Name** field and choose the appropriate device name.
  - d Click the arrow to the right of the **Port Number** field and set the port number to 0 (zero).

**Example:** When you are finished, the Set Up QAM window should look similar to the following example.

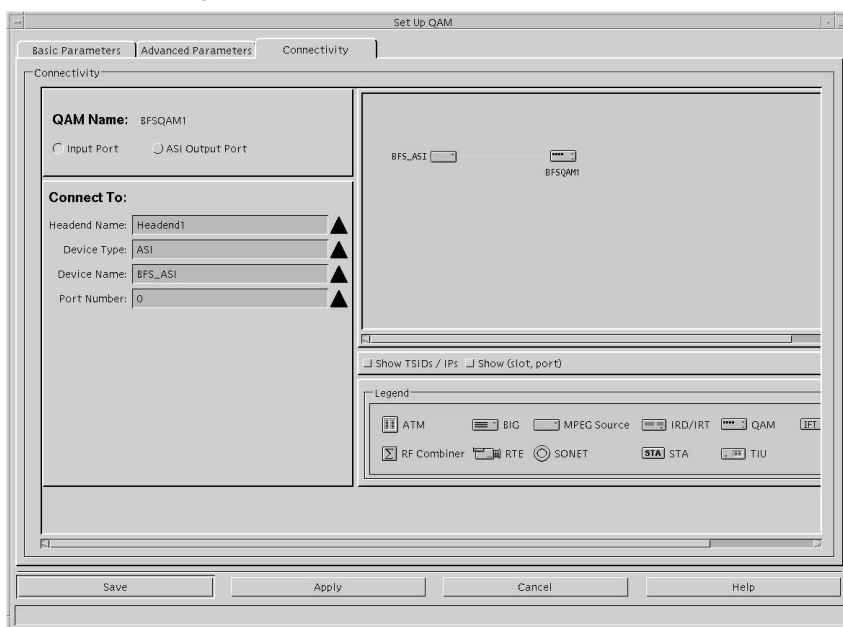

- 9 Click **Save**. The system saves the QAM configuration.
 


**Note:** A message may appear that concerns the QAM connection with Spectrum. You can ignore such a message. Click **Save** one or two more times until the QAM configuration is saved without any messages.
- 10 Close the Set Up QAM window.
- 11 Go to *Set Up the BFS Host* (on page 114).

## Set Up the BFS Host

### Setting Up the BFS Host


After setting up the QAM, follow these instructions to set up the BFS host.

- 1 From the DNCS Administrative Console, click the **Application Interface Module** tab and then select **BFS Admin**. The BFS Admin Site window opens.

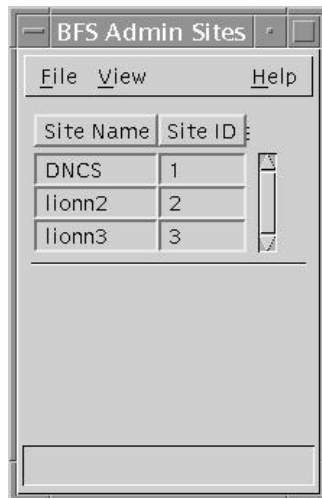


- 2 Double-click the site name of the system you are setting up. The Site [BFS site] BFS Administration window opens.

**Note:** If your site does not support RCS, this window does not appear. Instead, the window in step 3 appears.

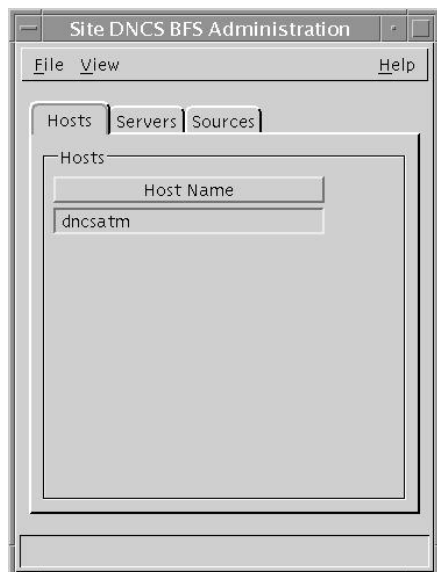

- 3 Select the **Hosts** tab; then double-click on the existing DNCS host. The Set Up BFS Host window opens.

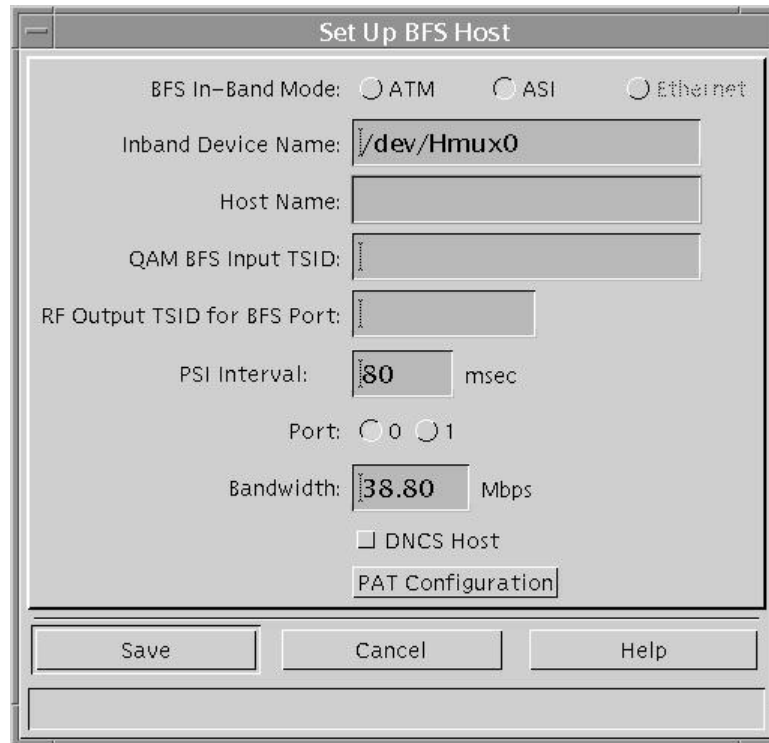

The image shows a window titled "Set Up BFS Host". It contains several configuration fields and options:

- BFS In-Band Mode:** Three radio buttons labeled ATM, ASI, and Ethernet. The ASI button is selected.
- Inband Device Name:** A text field containing the value `/dev/Hmux0`.
- Host Name:** An empty text field.
- QAM BFS Input TSID:** An empty text field.
- RF Output TSID for BFS Port:** An empty text field.
- PSI Interval:** A text field containing the value `80`, followed by the unit `msec`.
- Port:** Two radio buttons labeled 0 and 1. The 0 button is selected.
- Bandwidth:** A text field containing the value `38.80`, followed by the unit `Mbps`.
- DNCS Host:** An unchecked checkbox.
- PAT Configuration:** A button.

At the bottom of the window are three buttons: **Save**, **Cancel**, and **Help**.

- 4 Follow these directions to configure the Set Up BFS Host window.
- In the **BFS In-Band Mode** field, select **ASI**.
  - In the **Inband Device Name** field, type `/dev/Hmux0`.
  - In the **Host Name** field, type the name of the DNCS host.  
**Example: dnccsatm**
  - In the **QAM BFS Input TSID** field, type the value that represents the output TSID for the ASI\_BFS MPEG source.
  - In the **RF Output TSID for BFS Port** field, type the value that represents the output TSID for the BFS QAM or the BFS port on an MQAM.
  - In the **PSI Interval** field, type `80`.
  - In the **Port** field, select **0**.
  - In the **Bandwidth** field, type `38.80`.
  - Are you configuring Direct ASI on a DNCS (rather than an RNCS)?
    - If **yes**, click **DNCS Host**.
    - If **no**, go to step 5.

**Appendix C**  
**Direct ASI Installation and Configuration Procedures**

- 5 Click **PAT Configuration**. The Inband Data PAT window opens.
- 6 Click **Close** on the Inband Data PAT window.
- 7 Click **Save** on the Set Up BFS Host window. The system saves the BFS host configuration.
- 8 Go to *Setting the BIG Offline* (on page 117).



## Set the BIG Offline

### Setting the BIG Offline

After setting up the BFS source, follow these instructions to set the BIG offline.



**CAUTION:**

**Never delete the BIG. You need the BIG if you ever have to roll back the install of Direct ASI.**


- 1 From the DNCS Administrative Console, select the **Element Provisioning** tab.
- 2 Click **BIG**. The BIG List window opens.
- 3 Double-click the BIG. The Set Up BIG window opens.
- 4 At the **Administrative Status** field, select **Offline**.
- 5 Click **Save**. The system saves the BIG status to be offline.
- 6 Go to *Stop the BFS and OSM Processes* (on page 118).

## Stop the BFS and OSM Processes

### Stopping the BFS and OSM Processes

After setting the BIG offline, you need to stop the BFS and OSM processes on the DNCS next. Follow these instructions to stop the processes.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Type **dncsControl** and then press **Enter**. The Dncs Control window opens.

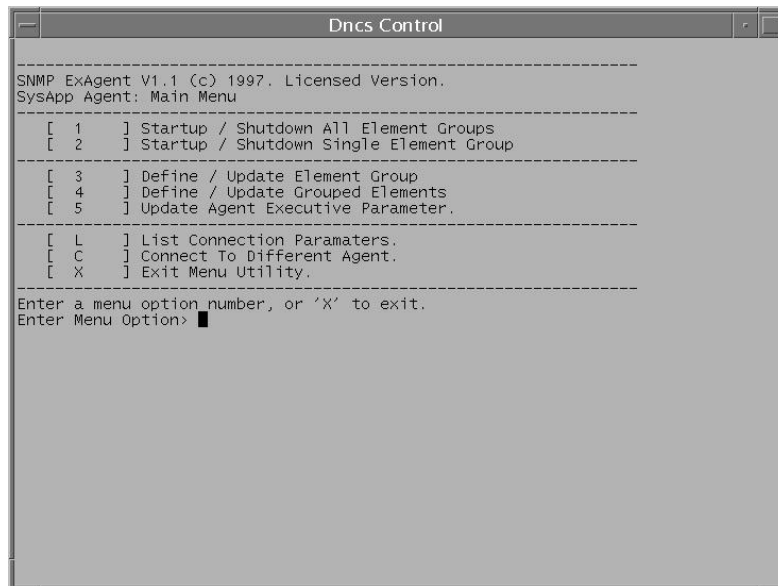

- 3 Type **2** (for Startup / Shutdown Single Element Group) and then press **Enter**. The DnCS Control window updates to show all the servers and processes running on the DNCS.

DnCS Control				
Hostname: dnCS, UpTime: 95:57:50.00				
[ 1 ]	DNCS SNMP & ORBIX Daemons	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 1, Errs: 0
[ 2 ]	DNCS Alarm Collector	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 1, Errs: 0
[ 3 ]	BossServer/IDM/QAM BIG & QPSK Managers	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 4, Errs: 0
[ 4 ]	DNCS HCT Manager & OSM	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 4, Errs: 0
[ 5 ]	DNCS drin	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 19, Errs: 3
[ 6 ]	DNCS DSM/BSM and SiManager	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 2, Errs: 0
[ 7 ]	DNCS CAA Server	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 0, Errs: 0
[ 8 ]	DNCS camPsm, camAm, camAuditor, emmDistributor	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 5, Errs: 0
[ 9 ]	BFS Server	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 1, Errs: 0
[ 11 ]	Pass Through	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 1, Errs: 0
[ 12 ]	IPPV Management	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 2, Errs: 0
[ 13 ]	Message Server	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 1, Errs: 0
[ 14 ]	saManager	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 1, Errs: 0
[ 15 ]	Bootp Daemon	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 0, Errs: 0
[ 17 ]	GUI Servers	Tgt Stt: running(2),	Curr Stt: running(2),	Rest: 0, Errs: 0

(Enter Number / X=Return To Menu / L=List Details / CR=Refresh)>

- 4 Type the number associated with **BFS Server** and then press **Enter**. The DnCS Control window updates to display a message prompting you to enter the target status for the entire element group or to type E to display the individual elements of the group.
- 5 Type **1** (for stopped) and then press **Enter**. A confirmation message appears.
- 6 Type **y** (for yes) and then press **Enter**. After a few moments, the DnCS Control window updates to display the current state (Curr Stt) of the selected group.
- 7 Wait until the current state of the BFS Server group is **Stopped**.  
**Note:** The DnCS Control window updates automatically every few seconds or you can press **Enter** to force an update.
- 8 When the current state of the BFS Server group is **Stopped**, type the number associated with **DNCS HCT Manager & OSM** and then press **Enter**. The DnCS Control window updates to display a message prompting you to enter the target status for the entire element group or to type E to display the individual elements of the group.
- 9 Type **e** and then press **Enter**. The DnCS Control window updates to display the individual elements of the DNCS HCT Manager & OSM group.

## Appendix C

### Direct ASI Installation and Configuration Procedures


- 10 Type the number associated with **/dvs/dncls/bin/OSM** and then press **Enter**. The Dncls Control window updates to display a message prompting you to enter the target status of the selected element.
- 11 Type **1** (for stopped) and then press **Enter**. A confirmation message appears.
- 12 Type **y** (for yes) and then press **Enter**. After a few moments, the Dncls Control window updates to display the current state (Curr Stt) of the selected element.
- 13 Wait until the current state of the **/dvs/dncls/bin/OSM** process is **Stopped**.  
**Note:** The Dncls Control window updates automatically every few seconds or you can press **Enter** to force an update.
- 14 When the current state of the **/dvs/dncls/bin/OSM** process is **Stopped**, follow the on-screen instructions to exit from the dnclsControl utility.
- 15 Go to *Tear Down BFS Sessions* (on page 121).

# Tear Down BFS Sessions

## Tearing Down BFS Sessions

After stopping the BFS and OSM processes, tear down the BFS sessions. Follow these instructions to tear down the BFS sessions.

- 1 From the DNCS Administrative Console, select the **Utilities** tab.
- 2 Click **Session List**. The Sessions window opens.

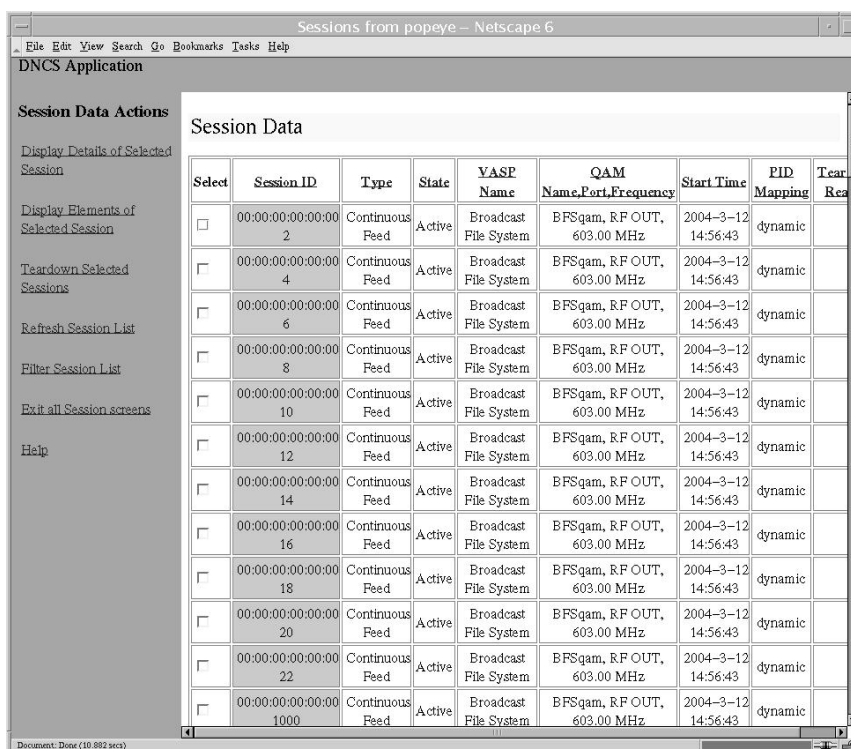

Select	Session ID	Type	State	YASF Name	QAM Name, Port, Frequency	Start Time	PID Mapping	Tear Down
<input type="checkbox"/>	00:00:00:00:00:00 2	Continuous Feed	Active	Broadcast File System	BFSqam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 4	Continuous Feed	Active	Broadcast File System	BFSqam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 6	Continuous Feed	Active	Broadcast File System	BFSqam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 8	Continuous Feed	Active	Broadcast File System	BFSqam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 10	Continuous Feed	Active	Broadcast File System	BFSqam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 12	Continuous Feed	Active	Broadcast File System	BFSqam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 14	Continuous Feed	Active	Broadcast File System	BFSqam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 16	Continuous Feed	Active	Broadcast File System	BFSqam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 18	Continuous Feed	Active	Broadcast File System	BFSqam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 20	Continuous Feed	Active	Broadcast File System	BFSqam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 22	Continuous Feed	Active	Broadcast File System	BFSqam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 1000	Continuous Feed	Active	Broadcast File System	BFSqam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	

- 3 Highlight the BFS sessions and then click **Teardown Selected Sessions**. A confirmation message appears.
- 4 Click **OK**. The system tears down the BFS sessions.

## Clear Completed, Pending, or Failed Sessions

### Clearing Completed, Pending, or Failed Sessions

Follow these instructions to clear completed, pending, or failed sessions.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Type **clearDbSessions -c** and then press **Enter**.

**Important!** Complete this step even if the Session List window, in the previous procedure — Tear Down BFS Sessions — shows no sessions.

# Enable the System for ASI

## Introduction

To finally enable your system for Direct ASI, there are a few more steps you need to complete. These steps are detailed in the following sections.

## Enable ASI From the DNCS GUI

Follow these instructions to configure the BFS QAM for ASI.

- 1 From the DNCS Administrative Console, select the **Element Provisioning** tab.
- 2 Click **QAM**. The QAM List opens.
- 3 Double-click the BFS QAM. The Set Up QAM window opens.
- 4 At the **Ports** field, select **ASI**.
- 5 Click **Save**.
- 6 Click **Close**. The Set Up QAM window closes.
- 7 Click **File** and then select **Close** on the QAM List window.

## Reset the BFS QAM

Reset the BFS QAM, using one of the following methods:

- The DNCS GUI
- The front panel of the BFS QAM
- The auditQam Utility

## Inspect the Front Panel of the BFS QAM

In this procedure, you will inspect the front panel of the BFS QAM to confirm that the BFS QAM is indeed configured for ASI. If the front panel reveals that the BFS QAM is not configured for ASI, you need to manually configure it. The following procedure guides you through the necessary steps.

- 1 Press the **Options** button on the front panel of the BFS QAM until **Input Selection** appears.
- 2 Does the **Input Selection** field reveal that the BFS QAM is configured for ASI?
  - If **yes**, skip the remainder of this procedure and go to *Re-Cable the System for ASI* (on page 124).
  - If **no**, continue with step 3.
- 3 Press the up or down arrow button until **ASI** appears in the **Input Selection** field.
- 4 Press **Enter** to save the newly configured BFS QAM.

## Re-Cable the System for ASI

Now that the BFS QAM is configured for ASI, your next step is to configure the cabling of the BFS QAM. Follow these instructions to re-cable the system for ASI.

- 1 Remove the SWIF cable from the back of the BFS QAM.
- 2 Connect one end of the ASI cable to the back of the BFS QAM and connect the other end to the ASI connector on the back of the DNCS.

## Re-Check the BFS QAM

Check the front panel of the BFS QAM periodically for an hour, or so. Make sure that the **Input Selection** field still reads **ASI**. If it no longer reads ASI, reset it to ASI.



## Restart the BFS and OSM Processes

### Restarting the BFS and OSM Processes

You are now ready to restart the BFS and OSM processes, which you stopped earlier in this appendix. Follow these instructions to restart the BFS and OSM processes.

**Note:** When you restart the BFS processes, the system rebuilds the PAT Configuration table. It may take up to 10 minutes for the PAT Configuration table to be rebuilt.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Type **dncsControl** and then press **Enter**. The DnCS Control window opens.
- 3 Type **2** (for Startup / Shutdown Single Element Group) and then press **Enter**. The DnCS Control window updates to show all the servers and processes on the DNCS.
- 4 Type the number associated with **BFS Server** and then press **Enter**. The DnCS Control window updates to display a message prompting you to enter the target status for the entire element group or to type E to display the individual elements of the group.
- 5 Type **2** (for running) and then press **Enter**. A confirmation message appears.
- 6 Type **y** (for yes) and then press **Enter**. After a few moments, the DnCS Control window updates to display the current state (Curr Stt) of the selected group.
- 7 Wait until the current state of the BFS Server group is **Running**.  
**Note:** The DnCS Control window updates automatically every few seconds or you can press **Enter** to force an update.
- 8 When the current state of the BFS Server group is **Running**, type the number associated with **DNCS HCT Manager & OSM** and then press **Enter**. The DnCS Control window updates to display a message prompting you to enter the target status for the entire element group or to type E to display the individual elements of the group.
- 9 Type **e** and then press **Enter**.  
**Note:** The DnCS Control window updates to display the individual elements of the DNCS HCT Manager & OSM group.
- 10 Type the number associated with **/dvs/dnCS/bin/OSM** and then press **Enter**. The DnCS Control window updates to display a message prompting you to enter the target status of the selected element.

## Appendix C

### Direct ASI Installation and Configuration Procedures

- 11 Type **2** (for running) and then press **Enter**. A confirmation message appears.
- 12 Type **y** (for yes) and then press **Enter**. After a few moments, the DnCS Control window updates to display the current state (Curr Stt) of the selected element.
- 13 Wait until the current state of the /dvs/dnCS/bin/OSM process is **Running**.  
**Note:** The DnCS Control window updates automatically every few seconds or you can press Enter to force an update.
- 14 When the current state of the /dvs/dnCS/bin/OSM process is **Running**, follow the on-screen instructions to exit from the dnCSControl utility.

## Powering Down the BFS BIG

Conclude your procedure for configuring your system for Direct ASI by turning off power to the BFS BIG.

## Checkout Procedures for the ASI Card

### Confirming the Session Count

After completing the procedures in this appendix to install and configure the ASI card, complete some or all of the tests in this section to confirm that the ASI card is working as intended. These tests are only in outline form. Cisco assumes that upgrade engineers are familiar with the detail behind each test.

- 1 Press the **Options** button on the front panel of the BFS QAM until the **Session Count** appears.
- 2 Confirm that the number of sessions on the BFS QAM is equal to the number of BFS sessions on the DNCS.
- 3 Re-run the procedures in *Verify DBDS Stability* (on page 19).



# D

## Direct ASI Rollback Procedures

### Introduction

Use the procedures in this appendix to roll a system back from an unsuccessful installation of Direct ASI.

**Important:** Never roll a system back without having first consulted with Cisco Services. In many cases, Cisco engineers can help you troubleshoot whatever problems you may have experienced with the installation of Direct ASI.

### In This Appendix

■ Record TSID Values for BFS MPEG Source and BFS QAM.....	130
■ Record Configuration Data .....	133
■ Set the BIG Online.....	134
■ Reconfigure the QAM .....	135
■ Reconnect the BIG.....	137
■ Configure the Front Panel of the BFS QAM.....	138
■ Configure Inband Data .....	139
■ Set Up DNCS Host.....	140
■ Stop the BFS, OSM, and siManager Processes.....	141
■ Tear Down BFS Sessions .....	142
■ Clear Completed, Pending, or Failed Sessions .....	143
■ Stop the BFS QAM.....	144
■ Restart the BFS, OSM, and siManager Processes .....	145
■ Restart the BFS QAM .....	146

## Record TSID Values for BFS MPEG Source and BFS QAM

### Introduction

The first step in rolling back the Direct ASI installation requires that you record the current transport stream ID (TSID) values for the BFS MPEG source and the BFS QAM.

**Note:** If a GQAM or an MQAM is used as the BFS QAM, record the TSID for the BFS port of the GQAM or MQAM.

### Recording the TSID Value for the BFS MPEG Source

Follow these instructions to record the TSID for the BFS MPEG Source.

- 1 From the DNCS Administrative Console, click the **Element Provisioning** tab and then select **MPEG Source**.

**Result:** The MPEG Source List window opens.

- 2 Double-click the entry for **ASI\_BFS**.

**Result:** The Set Up MPEG Source window opens.

- 3 Select the **Connectivity** tab.

Set Up MPEG Source

Basic Parameters Connectivity

Connectivity

MPEG Source Name: ASI\_BFS

Output Port	TS ID
0	1000

Create Port  
Modify Port  
Delete Port

Connect To:

Headend Name: CVS\_EAST\_CWN ▲

Device Type: QAM ▲

Device Name: EASTBIGQAM ▲

Port Number: 1 ▲

Save Apply Cancel Help


- 4 Record the value for TS ID here: \_\_\_\_\_
- 5 Click **Cancel** to close the Set Up MPEG Source window.

- Click **File** and then select **Close** to close the MPEG Source List window.

## Recording the TSID Value for the BFS QAM


Follow these instructions to record the TSID for the BFS QAM.

- From the DNCS Administrative Console, click the **Element Provisioning** tab and then select **QAM**. The QAM List window opens.

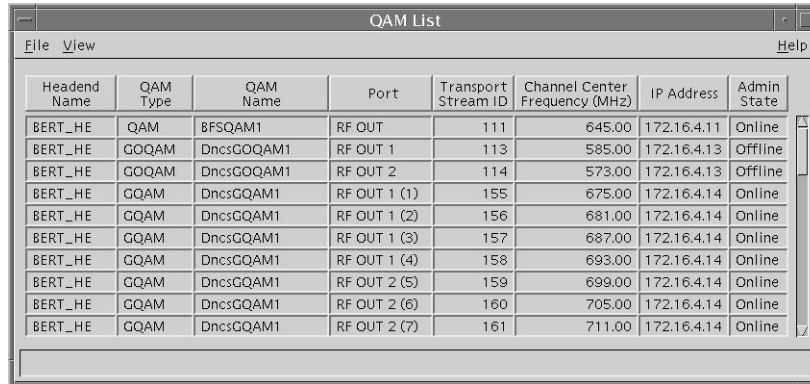

Headend Name	QAM Type	QAM Name	Port	Transport Stream ID	Channel Center Frequency (MHz)	IP Address	Admin State
BERT_HE	QAM	BFSQAM1	RF OUT	111	645.00	172.16.4.11	Online
BERT_HE	GOQAM	DncsGOQAM1	RF OUT 1	113	585.00	172.16.4.13	Offline
BERT_HE	GOQAM	DncsGOQAM1	RF OUT 2	114	573.00	172.16.4.13	Offline
BERT_HE	QAM	DncsGOQAM1	RF OUT 1 (1)	155	675.00	172.16.4.14	Online
BERT_HE	QAM	DncsGOQAM1	RF OUT 1 (2)	156	681.00	172.16.4.14	Online
BERT_HE	QAM	DncsGOQAM1	RF OUT 1 (3)	157	687.00	172.16.4.14	Online
BERT_HE	QAM	DncsGOQAM1	RF OUT 1 (4)	158	693.00	172.16.4.14	Online
BERT_HE	QAM	DncsGOQAM1	RF OUT 2 (5)	159	699.00	172.16.4.14	Online
BERT_HE	QAM	DncsGOQAM1	RF OUT 2 (6)	160	705.00	172.16.4.14	Online
BERT_HE	QAM	DncsGOQAM1	RF OUT 2 (7)	161	711.00	172.16.4.14	Online

- Double-click the entry for the BFS QAM. The Set Up QAM window opens.

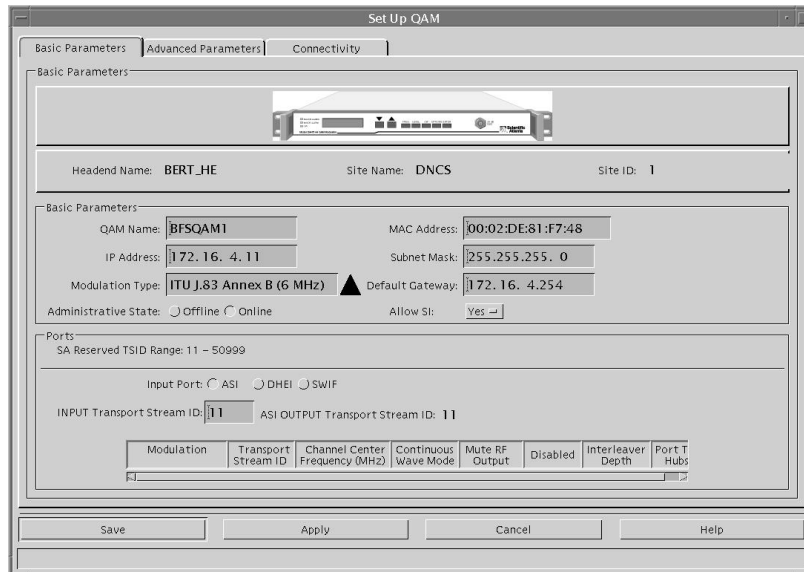

**Set Up QAM**

Basic Parameters | Advanced Parameters | Connectivity

Headend Name: BERT\_HE Site Name: DNCS Site ID: 1

QAM Name: BFSQAM1 MAC Address: 00:02:DE:81:F7:48

IP Address: 172.16.4.11 Subnet Mask: 255.255.255.0

Modulation Type: ITU J.83 Annex B (6 MHz) Default Gateway: 172.16.4.254

Administrative State: ☐ Offline ☒ Online Allow SI: Yes

Ports  
SA Reserved TSID Range: 11 - 50999

Input Port: ☐ ASI ☐ DHEI ☐ SWIF

INPUT Transport Stream ID: 11 ASI OUTPUT Transport Stream ID: 11

Modulation	Transport Stream ID	Channel Center Frequency (MHz)	Continuous Wave Mode	Mute RF Output	Disabled	Interleaver Depth	Port 1 Hub5

Save Apply Cancel Help

- Record the value for **Input Transport Stream ID** here: \_\_\_\_\_
- Click **Cancel** to close the Set Up QAM window.
- Click **File** and then select **Close** to close the QAM List window.

## Turn on the BIG

### Verify VDAT Light is Illuminated

Turn on the BIG and verify that the VDAT light illuminates.





## Record Configuration Data

### Recording Configuration Details

When you configured your system for Direct ASI in Appendix C, one of the procedures called for you to record the BFS TSID and the QAM connection details regarding the Direct ASI card. If you failed to complete the *Record Configuration Data* (on page 105) procedure when you configured your system for Direct ASI, complete that procedure now.

## Set the BIG Online

### Setting the BIG Online

Follow these instructions to set the BIG online.

- 1 From the DNCS Administrative Console, click the **Element Provisioning** tab and then select **BIG**. The BIG List window opens.
- 2 Double-click the entry for the BIG. The Set Up BIG window opens.

Set Up BIG

BIG Cards Connectivity

BIG

Headend Name: BERT\_HE

BIG Name: bogusness

Administrative State: ☒ Offline ☐ Online

Msync Control Card

Slot Number: 1

IP Address: 172.10.1.2

Physical Address: 00:02:DE:22:11:22

Subnet Mask: 255.255.255.0

Output Mode: ☐ SWIF ☒ ASI

Output Transport Stream ID: 233

PAT Configuration

Save Apply Cancel Help

- 3 Click **Online** in the **Administrative State** field.
- 4 Click **Save**.
- 5 Click **File** and then select **Close** to close the BIG List window.

# Reconfigure the QAM

## Reconfiguring the QAM

Follow these instructions to reconfigure the BFS QAM to support the rollback of Direct ASI.

- 1 From the DNCS Administrative Console, click the **Element Provisioning** tab and then select **QAM**. The QAM List window opens.
- 2 Double-click the entry for the BFS QAM. The Set Up QAM window opens.
- 3 Select the **Connectivity** tab.
- 4 In the **Connect To** area of the window, click the arrow to the right of each of the following fields and set each field to **none**:
  - **Device Type**
  - **Device Name**
  - **Card Type**
  - **Slot Number**
  - **Port Number**
- 5 Click **Save**.
- 6 Select the **Basic Parameters** tab on the Set Up QAM window.
- 7 In the **Input Port** field, select **SWIF**.

**Exception:** If your system uses ASI output from the Msync card, leave the Input Port field at **ASI**.
- 8 In the **Input Transport Stream ID** field, enter the value from the SWIF transmit card on the BIG.

**Note:** You can find this value by clicking **Show TSIDs** from the Connectivity tab of the Set Up BIG window.
- 9 Click **Save**.
- 10 Select the **Connectivity** tab again on the Set Up QAM window.

**Appendix D**  
**Direct ASI Rollback Procedures**

- 11** Follow these instructions to configure the fields in the **Connect To** area of the window to support the BIG.

**Note:** Click the arrow to the right of each field to change the value of the field.

- a** Set the **Device Type** field to **BIG**.
- b** Set the **Device Name** field to match the name of the BFS BIG.
- c** Set the **Card Type** field to **SWIF Transmit**.

**Exception:** Select **Msync** if your system uses ASI output from the Msync card.

- d** Set the **Slot Number** field to whatever slot the SWIF transmit card is installed in the BIG.
  - e** Set the **Port Number** field to the port used by the SWIF transmit card in the BIG.
- 12** Click **Save**.
  - 13** Close the Set Up QAM window.

## Reconnect the BIG

### Reconnecting the BIG

Follow these instructions to reconnect the input cable from the BFS QAM to the BIG.

- 1 Remove the ASI input cable from the back of the BFS QAM.
- 2 Reinstall the SWIF cable to the back of the BFS QAM.

## Configure the Front Panel of the BFS QAM

### Configuring the Front Panel of the BFS QAM

In this procedure, you will inspect the front panel of the BFS QAM to confirm that the BFS QAM is indeed configured for SWIF. If the front panel reveals that the BFS QAM is *not* configured for SWIF, you need to manually configure it. The following procedure guides you through the necessary steps.

- 1 Press the **Options** button on the front panel of the BFS QAM until **Input Selection** appears.
- 2 Does the **Input Selection** field reveal that the BFS QAM is configured for **SWIF**?
  - If **yes**, skip the remainder of this procedure and go to *Configure Inband Data* (on page 139).
  - If **no**, continue with step 3.
- 3 Press the up or down arrow button until **SWIF** appears in the **Input Selection** field.
- 4 Press **Enter** to save the newly configured BFS QAM.

# Configure Inband Data

## Configuring Inband Data

After reconnecting the BIG, follow these instructions to configure inband data.

- 1 From the DNCS Administrative Console, select the **Application Interface Modules** tab.
- 2 Click **Inband Data Config**.  
**Result:** The Inband Data Configuration window opens.
- 3 In the **BFS In-Band Mode** field, select **ATM**.
- 4 Click **Save**.
- 5 Close the Inband Data Configuration window.

## Set Up DNCS Host

### Setting Up the DNCS Host

Follow these instructions to configure the DNCS host.

- 1 From the DNCS Administrative Console, select the **Application Interface Modules** tab.
- 2 Click **BFS Admin**.  
**Result:** The BFS Administration window opens.
- 3 Select the **Hosts** tab.
- 4 Double-click **dncsatm**.  
**Note:** If this is a distributed site (supports the RNCS feature), double-click the DNCS site.  
**Result:** The Set Up BFS Host window opens.
- 5 On the Set Up BFS Host window, confirm that the **Host Name** is **dncsatm** and that the other fields are empty.
- 6 Close the Set Up BFS Host window.
- 7 Select **Sources** on the BFS Administration window.  
**Result:** The window updates to list all BFS sources.
- 8 Double-click Source ID **2**.  
**Result:** The Set Up BFS Source window opens.
- 9 On the Set Up BFS Source window, verify that the **Transmit Type** is **In-band** and that the **Device Name** is **/dev/xtipvc0**.
- 10 Click **Save** to close the Set Up BFS Source window.
- 11 Repeat steps 8 through 10 for all inband sources, plus any customized inband sources defined by the system operator.  
**Note:** An inband source usually has the designation IB as part of its name.



## Stop the BFS, OSM, and siManager Processes

### Stopping the BFS, OSM, and siManager Processes

You next need to stop the BFS, OSM, and siManager processes on the DNCS. Follow these instructions to stop the processes.

- 1 From the DNCS Control window, click to highlight the **bfsRemote** process.
- 2 Click **Process** and then select **Stop Process**. In a few minutes, the indicator for the bfsRemote process changes from green to red.

**Important!** Do not go to step 3 until the indicator has changed to red.

- 3 From the DNCS Control window, click to highlight the **bfsServer** process.
- 4 Click **Process** and then select **Stop Process**. In a few minutes, the indicator for the bfsServer process changes from green to red.

**Important!** Do not go to step 5 until the indicator has changed to red.

- 5 From the DNCS Control window, click to highlight the **osm** process.
- 6 Click **Process** and then select **Stop Process**. In a few minutes, the indicator for the osm process changes from green to red.

**Important!** Do not go to step 7 until the indicator has changed to red.

- 7 From the DNCS Control window, click to highlight the **siManager** process.
- 8 Click **Process** and then select **Stop Process**. In a few minutes, the indicator for the siManager process changes from green to red.


**Important!** Do not go to the next procedure until the indicator has changed to red.

## Tear Down BFS Sessions

### Tearing Down BFS Sessions

After stopping the BFS and OSM processes, tear down the BFS sessions. Follow these instructions to tear down the BFS sessions.

- 1 From the DNCS Administrative Console, select the **Utilities** tab.
- 2 Click **Session List**. The Sessions window opens.

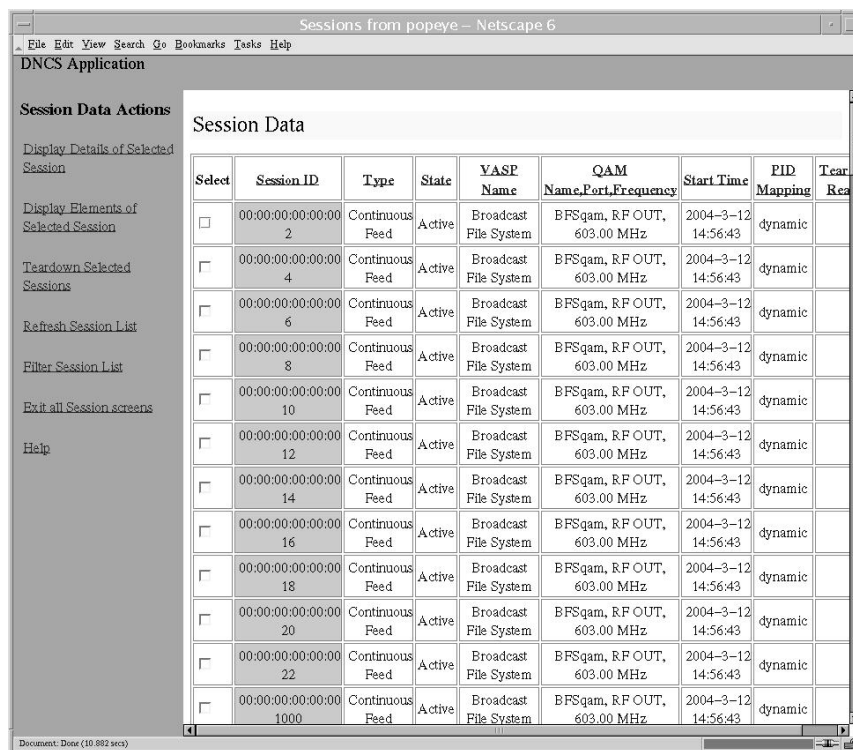

The screenshot shows a web browser window titled "Sessions from popeye - Netscape 6". The main content area is titled "DNCS Application" and "Session Data". On the left, there is a sidebar with "Session Data Actions" including: "Display Details of Selected Session", "Display Elements of Selected Session", "Teardown Selected Sessions", "Refresh Session List", "Filter Session List", "Exit all Session screens", and "Help". The main table lists 12 sessions, each with a checkbox in the "Select" column.

Select	Session ID	Type	State	VASF Name	QAM Name,Port,Frequency	Start Time	PID Mapping	Tear Rea
<input type="checkbox"/>	00:00:00:00:00:00 2	Continuous Feed	Active	Broadcast File System	BFSgam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 4	Continuous Feed	Active	Broadcast File System	BFSgam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 6	Continuous Feed	Active	Broadcast File System	BFSgam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 8	Continuous Feed	Active	Broadcast File System	BFSgam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 10	Continuous Feed	Active	Broadcast File System	BFSgam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 12	Continuous Feed	Active	Broadcast File System	BFSgam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 14	Continuous Feed	Active	Broadcast File System	BFSgam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 16	Continuous Feed	Active	Broadcast File System	BFSgam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 18	Continuous Feed	Active	Broadcast File System	BFSgam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 20	Continuous Feed	Active	Broadcast File System	BFSgam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 22	Continuous Feed	Active	Broadcast File System	BFSgam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	
<input type="checkbox"/>	00:00:00:00:00:00 1000	Continuous Feed	Active	Broadcast File System	BFSgam, R F OUT, 603.00 MHz	2004-3-12 14:56:43	dynamic	

- 3 Highlight the BFS sessions and then click **Teardown Selected Sessions**. A confirmation message appears.
- 4 Click **OK**. The system tears down the BFS sessions.

## Clear Completed, Pending, or Failed Sessions

### Clearing Completed, Pending, or Failed Sessions

Follow these instructions to clear completed, pending, or failed sessions.

- 1 If necessary, open an xterm window on the DNCS.
- 2 Type **clearDbSessions -c** and then press **Enter**.

**Important!** Complete this step even if the Session List window, in the previous procedure — Tear Down BFS Sessions — shows no sessions.

## Stop the BFS QAM

### Stopping the BFS QAM

After running the `clearDbSessions` command to clear completed, pending, or failed sessions, you need to turn off the BFS QAM. Locate the power switch on the back panel of the BFS QAM and set it to the **Off** position.

## Restart the BFS, OSM, and siManager Processes

### Restarting the BFS, OSM, and siManager Processes

Follow these instructions to restart the BFS, OSM, and siManager processes.

- 1 From the DNCS Control window, click to highlight the **bfsRemote** process.
- 2 Click **Process** and then select **Start Process**. In a few minutes, the indicator for the **bfsRemote** process changes from red to green.

**Important!** Do not go to step 3 until the indicator has changed to green.

- 3 From the DNCS Control window, click to highlight the **bfsServer** process.
- 4 Click **Process** and then select **Start Process**. In a few minutes, the indicator for the **bfsServer** process changes from red to yellow.

**Note:** The **bfsServer** process will not show green because the BFS QAM is currently stopped.

**Important!** Do not go to step 5 until the indicator has changed to yellow.

- 5 From the DNCS Control window, click to highlight the **osm** process.
- 6 Click **Process** and then select **Start Process**. In a few minutes, the indicator for the **osm** process changes from red to green.

**Important!** Do not go to step 7 until the indicator has changed to green.

- 7 From the DNCS Control window, click to highlight the **siManager** process.
- 8 Click **Process** and then select **Start Process**. In a few minutes, the indicator for the **siManager** process changes from red to green.

**Important!** Do not go to the next procedure until the indicator has changed to green.

## Restart the BFS QAM

### Restarting the BFS QAM

Locate the power switch on the back panel of the BFS QAM and set it to the **On** position.

**Notes:**

- The BFS sessions that you tore down earlier in this appendix will rebuild in 10 to 15 minutes.
- After the BFS sessions have rebuilt, the indicator for the bfsServer process on the DNCS Control window will change from yellow to green.





Cisco Systems, Inc.  
5030 Sugarloaf Parkway, Box 465447  
Lawrenceville, GA 30042

678 277-1120  
800 722-2009  
[www.cisco.com](http://www.cisco.com)

This document includes various trademarks of Cisco Systems, Inc. Please see the Notices section of this document for a list of the Cisco Systems, Inc. trademarks used in this document.

Product and service availability are subject to change without notice.

© 2006, 2012 Cisco and/or its affiliates. All rights reserved.  
June 2012 Printed in USA

Part Number 4000916 Rev C