

Cisco 7304 2-Port OC-3 ATM Line Card


Product Overview

The Cisco® 7304 2-Port OC-3/STM-1 ATM Line Card (Figure 1) is a versatile, high-performance line card that is well suited for a variety of applications. These applications include high-speed WAN uplinks in customer premises equipment (CPE) deployments, high-speed enterprise backbones, and high-speed uplinks for deploying the Cisco 7304 Router as a medium-density, medium-speed, edge-aggregation router in Tier 2 and 3 service provider points of presence (POPs).

Developed for customers that need a combination of performance and deployment flexibility, the Cisco 7304 Router meets current and future requirements for a midrange router. The Cisco 7304 Router delivers high-performance forwarding and hardware-accelerated services in a compact four-rack-unit (4-RU), four-interface slot form factor.

Figure 1

Cisco 7304 2-Port OC-3 ATM Line Card

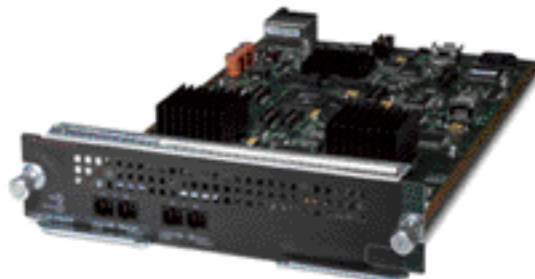

Powerful and flexible, the Cisco 7304 Router provides multiprotocol support, interface granularity, and high-availability features in a platform that is ideal for deployment in various applications such as high-end enterprise routing, medium-speed and medium-density leased-line aggregation in service provider Tier 2 and 3 POPs, and service provider-managed CPE deployments. Providing WAN connectivity at speeds ranging from DS3 through OC-48/STM-16, and LAN connectivity at speeds up to Gigabit Ethernet (using two 1000 Ethernet ports built into the Cisco NSE-100 route processor), the Cisco 7304 Router supports a wide range of concurrently running applications and lives up to the high standards of the Cisco 7000 Series of midrange routers.

Table 1 lists the features and benefits of the Cisco 7304 2-Port OC-3 ATM Line Card.

Table 1. Features and Benefits

| Features | Benefits |
|--|---|
| Two ports of OC-3 ATM per line card | Enables connectivity options for both enterprise and service provider customers |
| Up to 155.52 Mbps per port | Provides high-performance routing and connectivity |
| Online Insertion and Removal (OIR) | Allows for insertion of the card without rebooting the router |
| Multiprotocol Encapsulation over ATM Adaptation Layer (AAL)5 and classical IP over ATM | Allows flexibility to choose the protocol that best suits customers' needs |
| 2048 virtual circuits per port | Offers high scalability to meet the needs of service providers |

Product Specifications

Line Card

- Full-duplex ATM interface
- Unspecified bit rate (UBR) and non-real-time variable bit rate (VBR-nrt) service classes
- OIR
- 16 virtual channel identifier (VCI)/8 virtual path identifier (VPI) bits
- Support for 16- and 32-bit cyclic redundancy checks (CRCs)
- Synchronous Payload Envelope (SPE) scrambling
- 2048 active connections per port, 4096 active virtual circuits per board
- Per-virtual circuit and per-virtual path traffic shaping
- Classical IP and Address Resolution Protocol (ARP) over ATM (RFC 1577)
- Multiprotocol Encapsulation over AAL5 (RFC 1483)
- AAL5, F4/F5 operations, administration, and maintenance (OAM) cells
- User-Network Interface (UNI) 3.0, 3.1, and 4.0, Integrated Local Management Interface (ILMI) 3.0

Table 2 lists the optical specifications for the Cisco 7304 2-Port OC-3 ATM Line Card.

Table 2. Optical Specifications

| Fiber Interface | Transmit Power | | Wavelength | | Input Power | Input Sensitivity | Loss Budgets | Nominal Distance |
|--|----------------|---------|------------|---------|-------------|-------------------|--------------|------------------|
| Multimode (MM) | –20 dBm | –14 dBm | 1280 nm | 1335 nm | –8 dBm | –23 dBm | 0 to 7 dB | 1.2 mi (2 km) |
| Single mode-intermediate reach (SM-IR) | –15 dBm | –8 dBm | 1280 nm | 1335 nm | –8 dBm | –28 dBm | 0 to 12 dB | 9 mi (15 km) |

Tables 3–5 list the environmental specifications, physical specifications, and line card indicators for the Cisco 7304 2-Port OC-3 ATM Line Card.

Table 3. Environmental Conditions

| Cisco 7304 2-Port OC-3/STM-1 ATM Line Card | |
|--|-----------------------------|
| Operating temperature | 32° to 104°F (0° to 40°C) |
| Storage temperature | –4° to 149°F (–20° to 65°C) |
| Operating humidity | 5 to 90% (noncondensing) |
| Altitude | –500 to 6500 ft |

Performance

- Two ports of OC-3 ATM at 155.52-Mbps full duplex

MIBs

- See Cisco NSE-100 data sheet for more MIB support

Table 4. Physical Specifications

| Cisco 7304 2-Port OC-3/STM-1 ATM Line Card | |
|--|-----------------------------------|
| Height | 1.92 in. (4.87 cm) |
| Width | 8.44 in. (21.43 cm) |
| Depth | 12.94 in. (32.87 cm) |
| Weight | 3.0 lb (1.36 kg) |
| Mean time between failure (MTBF) | 5.5 year for system configuration |

Table 5. Line Card Indicators

| LED Label | Color | State | Function |
|-----------------|--------------|--------|---|
| Status | Green/Yellow | Green | Indicates line card is online |
| | | Yellow | Indicates line card bootstrapping is in progress |
| | | Off | Indicates line card is offline and deactivated |
| OIR | Green | On | Indicates line card is ready to be removed in command-line interface (CLI)-controlled OIR |
| | | Off | Indicates line card is online |
| Carrier/alarm | Green/Yellow | Green | Indicates that a valid SONET ¹ signal has been detected with no alarm conditions |
| | | Yellow | Indicates that an alarm condition is present |
| | | Off | Indicates that no valid SONET signal has been detected |
| Active/Loopback | Green/Yellow | Green | Indicates that the port has been configured and is enabled |
| | | Yellow | Indicates that the port is in diagnostic loopback mode |
| | | Off | Indicates that the port has not been configured |

1. Synchronous

Product Regulatory Compliance

Products bear CE marking, indicating compliance with the 89/366/EEC and 73/23/ECC directives, which include the following safety and EMC standards:

Safety

- UL 60950
- CSA C22.2
- EN60950
- IEC 60950
- TS 001
- AS/NZS 3260

EMC

- FCC Part 15 (CFR 47) Class A
- ICES-003 Class A
- EN55022 Class A
- CISPR 22 Class A
- AS/NZS 3548 Class A
- VCCI Class A
- EN55024
- EN50082-1
- ETS300386

Industry EMC, Safety, and Environmental Standards

- GR-63-Core NEBS Level 3 Requirement
- GR-1089-Core NEBS Level 3 Requirement
- ETS 300-019 Storage Class 1.1
- ETS 300-019 Transportation Class 2.3
- ETS 300-019 Stationary Use Class 3.1

Ordering Information

To order, visit http://www.cisco.com/public/ordering_info.shtml.

Table 6 provides ordering information for the Cisco 7304 2-Port OC-3 ATM Line Card.

Table 6. Ordering Information

| Product Number | Product Description |
|-------------------|---|
| 7300-2OC3ATM-MM | 2-port OC-3 ATM line card for Cisco 7304 Router, MM |
| 7300-2OC3ATM-MM= | 2-port OC-3 ATM line card for Cisco 7304 Router, MM, spare |
| 7300-2OC3ATM-SMI | 2-port OC-3 ATM line card for Cisco 7304 Router, SM-IR |
| 7300-2OC3ATM-SMI= | 2-port OC-3 ATM line card for Cisco 7304 Router, SM-IR, spare |



Service and Support

Cisco offers a wide range of services programs to accelerate customer success. These innovative services programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you to protect your network investment, optimize network operations, and prepare the network for new applications to extend network intelligence and the power of your business. For more information about Cisco Services, see [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

For More Information

For more information about the Cisco 7304 routers, visit <http://www.cisco.com/en/US/products/hw/routers/ps352/index.html> or contact your local Cisco account representative.

**Corporate Headquarters**

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters

Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: 31 0 20 357 1000
Fax: 31 0 20 357 1100

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-7660
Fax: 408 527-0883

Asia Pacific Headquarters

Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on the **Cisco Website at www.cisco.com/go/offices.**

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica
Croatia • Cyprus • Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR
Hungary • India • Indonesia • Ireland • Israel • Italy • Japan • Korea • Luxembourg • Malaysia • Mexico
The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal • Puerto Rico • Romania • Russia
Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan
Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

All contents are Copyright © 1992–2005 Cisco Systems, Inc. All rights reserved. Cisco, Cisco Systems, and the Cisco Systems logo are registered trademarks or trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0502R)
Pa/LW8980 08/05