



DATA SHEET

CISCO NETWORK PLANNING SOLUTION VERSION 1.0

Cisco® Network Planning Solution (NPS) helps users to optimize network capacity and performance, ensure network resiliency including during unplanned changes, improve application and service continuity, plan for new technology deployments, and validate planned configuration changes. Cisco NPS reduces the risks associated with network growth, migration, and consolidation.

PRODUCT OVERVIEW


The network has become a critical business resource by enabling organizations to develop and introduce new services and applications, improve productivity and accessibility, and increase business opportunities and market competitiveness. As such, organizations must plan and implement strategies that strengthen business continuity through improved network and application resilience while reducing operational expense. This includes the ability to predict, avoid, and mitigate against costly network and application service disruptions, and the confidence to quickly adapt the network to changing business opportunities.

Cisco NPS is a vital tool for improving network availability as well as application and service continuity. It operates on a high-fidelity software model of the production network, accurately simulating the behavior of routers, switches, firewalls, and applications to enable a broad range of change impact (“what-if”) analyses. Actionable information derived from analysis is used to make automated or guided configuration changes in the network. Using Cisco NPS removes the guesswork in the rollout of new applications and services, reduces costs by eliminating manual and time-consuming tasks, and can lower capital expenses. With Cisco NPS you can:

- Plan for network and traffic growth, consolidation, and migration.
- Maintain an online, continuously available repository of network data.
- Automatically size links for network performance and resilience.
- Plan for new technologies such as VPNs and voice over IP (VoIP).
- Forecast traffic based on trends.
- Predict the impact of node and link failures on traffic flows and resource usage.
- Optimize network topology for projected growth.

Cisco NPS provides a graphical view of the network topology (Figure 1), with the ability to access detailed information about node and link attributes. The network model can be modified through the GUI to predict the impact of changes in topology, device configuration, and traffic. Configuration changes can also be introduced into the model through a “virtual” Cisco IOS® Software command-line interface (CLI). Study results from Cisco NPS are provided in Web (HTML), MS Word (.rtf), or Extensible Markup Language (XML) reports.

Figure 1. Network Topology View From Cisco NPS

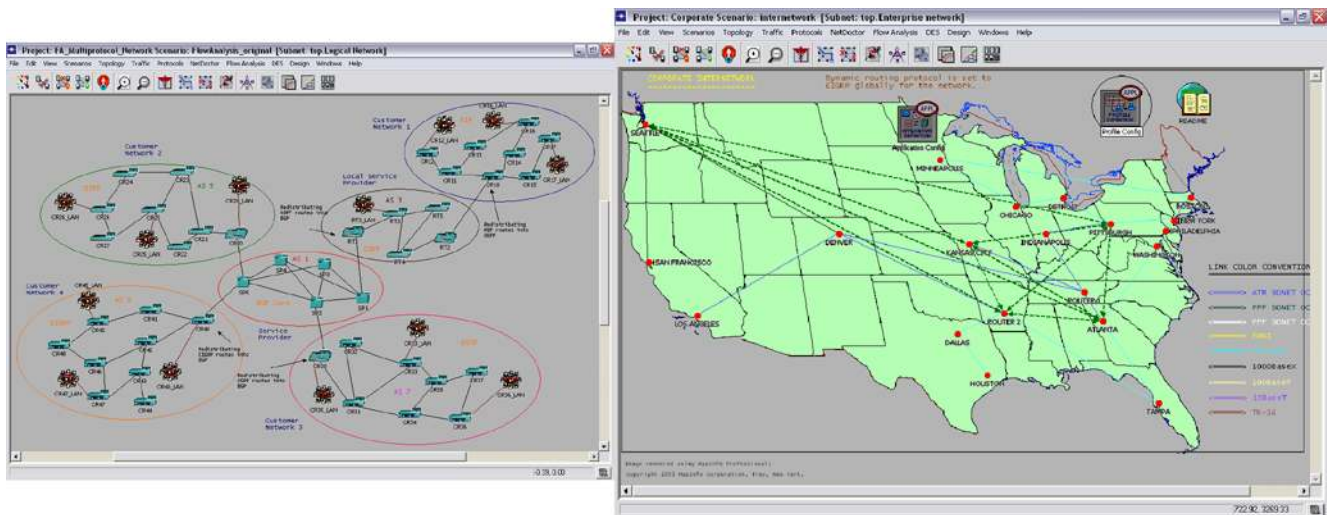

KEY FEATURES AND BENEFITS

High-Fidelity Network Data Model

Cisco NPS includes a Virtual Network Data Server that automatically maintains a detailed data model of the production network, including topology, configuration, and traffic. It collects and intelligently merges detailed network data from a broad range of sources, reconciling conflicts based on user-configurable priorities. Information can be obtained online from network devices including Cisco routers, Cisco Catalyst® switches, the Cisco PIX® Security Appliance, and devices from many other vendors. Built-in software intelligence also allows data to be imported from CiscoWorks, Cisco Network Connectivity Center, Cisco WAN Manager, Cisco NetFlow FlowCollector, and numerous third-party sources.

Advanced Network Planning and Analysis

Cisco NPS accurately models a broad range of Layer 2 and Layer 3 technologies, Cisco devices, and third-party devices. Link utilization or end-to-end flow data can be introduced into the detailed network model to perform accurate traffic-flow simulations. Multilayer failure analysis determines which traffic flows will be most affected by outages, and where resulting bottlenecks are likely to occur in a network. You can subject the entire network to an automated “reachability” analysis to identify potential connectivity problems. Cisco NPS also helps you predict the impact of deploying new technologies, protocols, or hosted applications, including VPNs, VLANs, VoIP, and more.

Automated Network Design and Optimization

Cisco NPS features an integrated design framework with standard, configurable models for common design operations. Configurable design actions can be parameterized, sequenced, and saved for repeated execution as a compound task.

- **Capacity planning** analyzes trends in the current traffic patterns and projects future traffic loads.
- **Resilient link dimensioning** determines the optimum networkwide link capacity in an existing topology to support projected traffic flows under normal and failure conditions. A failure case can encompass selected links, nodes, and shared risk groups.
- **Topology design** determines link placement for a ring backbone, a spanning tree, or dual spanning trees. Topology design actions can be used to design new networks, as well as perform incremental expansion of an existing network.

Rules-Based Configuration Analysis

Proposed network changes can be validated prior to deployment. Cisco NPS features a powerful rules-based engine that systematically checks the entire network model, diagnosing device misconfigurations, errors, policy violations, and inefficiencies. Cisco NPS intelligently processes and interprets device configurations the same way that production network devices do during operation. Expert knowledge of network devices, protocols, and routing behavior enables networkwide analysis of connectivity and resiliency, unlike other analysis tools that are limited to simple syntax checks on a single device at a time. A non-intrusive “test” of network security detects gaps in network defenses, and pinpoints misconfigured nodes that block valid network traffic. Customizable reports can demonstrate compliance with regulatory and IT Governance requirements, such as Sarbanes-Oxley, the Health Insurance Portability and Accountability Act of 1996 (HIPAA), the Federal Information Security Management Act (FISMA), and others.

Cisco NPS is provided with hundreds of standard checks that reflect industry best practices published by Cisco Systems®, U.S. government agencies, and others. Rules are provided with source code, sample policy templates, and an integrated authoring environment to help incorporate your organization’s best practices. Standard checks encompass:

- IP addressing and routing
- Protocol configurations, including Routing Information Protocol (RIP), Open Shortest Path First (OSPF), Interior Gateway Routing Protocol (IGRP), Enhanced IGRP (EIGRP), and Border Gateway Protocol (BGP)
- Route maps and access control lists (ACLs)
- Hot Standby Router Protocol (HSRP)
- Simple Network Management Protocol (SNMP), system logging, and router administration
- Firewall configurations and security protocols including authentication, authorization, and accounting (AAA), Kerberos, Network Address Translation (NAT), RADIUS, and TACACS+
- VPNs, tunnels, and VLANs
- Quality of service (QoS) and more

SYSTEM REQUIREMENTS

Cisco NPS contains a Design and Analysis engine and Virtual Network Data Server. The Design and Analysis engine is typically implemented on the user desktop. The Virtual Network Data Server is generally implemented on a dual-processor platform with the prerequisite database environment. The Virtual Network Data Server can be used in a single network-management environment with an additional Cisco NPS license added per concurrent user to provide design and analysis functions. Table 1 lists the system requirements for the Cisco NPS.

Table 1. System Requirements

	Design and Analysis	Virtual Network Data Server
Disk Space	20 GB	80 GB (or larger depending on network size and data retention practices)
Hardware	<ul style="list-style-type: none">• Intel Pentium 3, 4, or equivalent 1.5+ GHz (Windows)• Sun Ultrasparc II or III (Solaris)	Dual 3.0+ GHz Intel Pentium 4 or Xeon with 800 MHz FSB
Memory	1 GB (minimum)	4 GB (minimum)

	Design and Analysis	Virtual Network Data Server
Software	Only English language versions are supported: <ul style="list-style-type: none"> • Windows Server 2003 • Windows 2000 Server • Windows XP Professional • Windows 2000 Professional • Solaris 8 • Solaris 9 	Only English language versions are supported: <ul style="list-style-type: none"> • Windows Server 2003 • Windows 2000 Server • Windows XP Professional • Windows 2000 Professional
Prerequisites (Not included with Cisco NPS 1.0)		Only English language versions are supported: <ul style="list-style-type: none"> • Oracle 9i Database • Oracle 9i Application Server (AS) TopLink patched to Release 9.0.3.5

ORDERING INFORMATION

Cisco NPS 1.0 is available for purchase through regular Cisco sales and distribution channels worldwide. To place an order, visit the [Cisco Ordering Home Page](#).

Cisco NPS 1.0 licensing options are described in the Cisco NPS 1.0 product bulletin, available at:

http://www.cisco.com/en/US/prod/collateral/netmgts/ps6341/ps6363/prod_bulletin0900aecd802c8494.html

SERVICE AND SUPPORT

Cisco offers a wide range of services programs to accelerate customer success. These innovative services programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you to protect your network investment, optimize network operations, and prepare the network for new applications to extend network intelligence and the power of your business. For more information about Cisco Services, see [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

FOR MORE INFORMATION

For more information about the Cisco Network Planning Solution, visit <http://www.cisco.com/en/US/products/ps6363/index.html> or contact your local account representative.

**Corporate Headquarters**

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters

Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: 31 0 20 357 1000
Fax: 31 0 20 357 1100

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-7660
Fax: 408 527-0883

Asia Pacific Headquarters

Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia • Cyprus
Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland • Israel
Italy • Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal
Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan
Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

Copyright © 2005 Cisco Systems, Inc. All rights reserved. CCSP, CCVP, the Cisco Square Bridge logo, Follow Me Browsing, and StackWise are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, and iQuick Study are service marks of Cisco Systems, Inc.; and Access Registrar, Aironet, ASIST, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Empowering the Internet Generation, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, FormShare, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, LightStream, Linksys, MeetingPlace, MGX, the Networkers logo, Networking Academy, Network Registrar, Packet, PIX, Post-Routing, Pre-Routing, ProConnect, RateMUX, ScriptShare, SlideCast, SMARTnet, StrataView Plus, TeleRouter, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0502R)

205314.BK_ETMG_LF_6.05