

DATA SHEET

ENHANCED OPTICAL BOOSTER AMPLIFIER FOR THE CISCO ONS 15454 MULTISERVICE TRANSPORT PLATFORM

The Cisco® ONS 15454 Multiservice Transport Platform (MSTP) provides a comprehensive, intelligent dense wavelength-division multiplexing (DWDM) solution for expanding metropolitan (metro) and regional bandwidth.

PRODUCT OVERVIEW

The Cisco ONS 15454 MSTP offers enhanced optical booster amplifiers for extending the reach of a metro or regional network. The enhanced optical amplifier cards are part of the Cisco ONS 15454 MSTP intelligent DWDM architecture engineered to reduce DWDM complexity and speed the deployment of next-generation networking solutions.

The Cisco ONS 15454 enhanced optical amplifier cards (Figure 1) are plug-in modules that take advantage of proven Cisco ONS 15454 carrier-class features. These cards deliver the reach and optical performance to support a single DWDM channel all the way to 64 channels today—to meet the requirements of service provider and enterprise networks. Table 1 outlines the optical amplifier plug-in card types available for the Cisco ONS 15454 MSTP with the applications they are designed to support.

Figure 1

Cisco ONS 15454 Enhanced Optical Booster Amplifier



Table 1. Optical Amplifier Cards with Applications

Component	Deployment Application
Enhanced optical booster amplifier (OPT-BST-E)	This product amplifies the outgoing composite DWDM signal to overcome the attenuation of the fiber network. It integrates an optical service channel splitter/combiner to allow the optical supervisory channel (OSC) to be sent to and received from the optical service channel module (OSCM) card.
Optical booster amplifier (OPT-BST)	This product amplifies the outgoing composite DWDM signal to overcome the attenuation of the fiber network. It integrates an optical service channel splitter/combiner to allow the OSC to be sent to and received from the OSCM card. Deployment locations include any site that requires additional signal level.
Optical preamplifier (OPT-PRE)	This product amplifies the incoming composite DWDM signal to allow a sufficient optical power level to optical receivers on dropped wavelengths and to overcome the insertion losses of optical filters in the node. It employs a two-stage amplifier design to allow insertion of dispersion-management devices to compensate for pulse spreading at higher multiplexer speeds. Deployment locations include any site that requires additional signal level.

The Cisco ONS 15454 optical amplifiers take advantage of the latest in amplifier technology, variable optical attenuators, photo diodes, and extensive software to facilitate a high degree of automation for simplified operations. They feature low-noise-gain blocks for C-band optical-amplification requirements. For flexibility of application support, the amplifiers support two modes of operation, constant gain and constant power. They also provide fast-transient suppression to respond quickly to network changes without adding impairments and degradation. Each card integrates software-controllable variable optical attenuators (VOAs) along with extensive optical monitoring with photo diodes, to provide nodal- and network-based automatic power-level management. Extensive optical safety algorithms provide user safety when operating the network.

The enhanced booster amplifier cards incorporate faceplate-mounted LEDs to provide a quick visual check of the operational status at the card. Printed on each of the faceplates is an icon, an orange circle, which corresponds to shelf-slot icons located on the shelf assembly, indicating the shelf slot where the cards can be inserted. The cards are supported by the integrated Cisco Transport Controller craft manager, which provides the user access for operations, administration, maintenance, and provisioning (OAM&P) for the system.

Selection and deployment of the optical amplifiers depend on the requirements of the network. The Cisco MetroPlanner optical design tool is available to assist in the engineering, bill-of-material development, and deployment of the DWDM network. Figures 2 through 4 show sample signal-flow diagrams for a selection of Cisco ONS 15454 MSTP node types, outlining the use for each amplifier type.

Figure 2
32 Channel ROADM Node

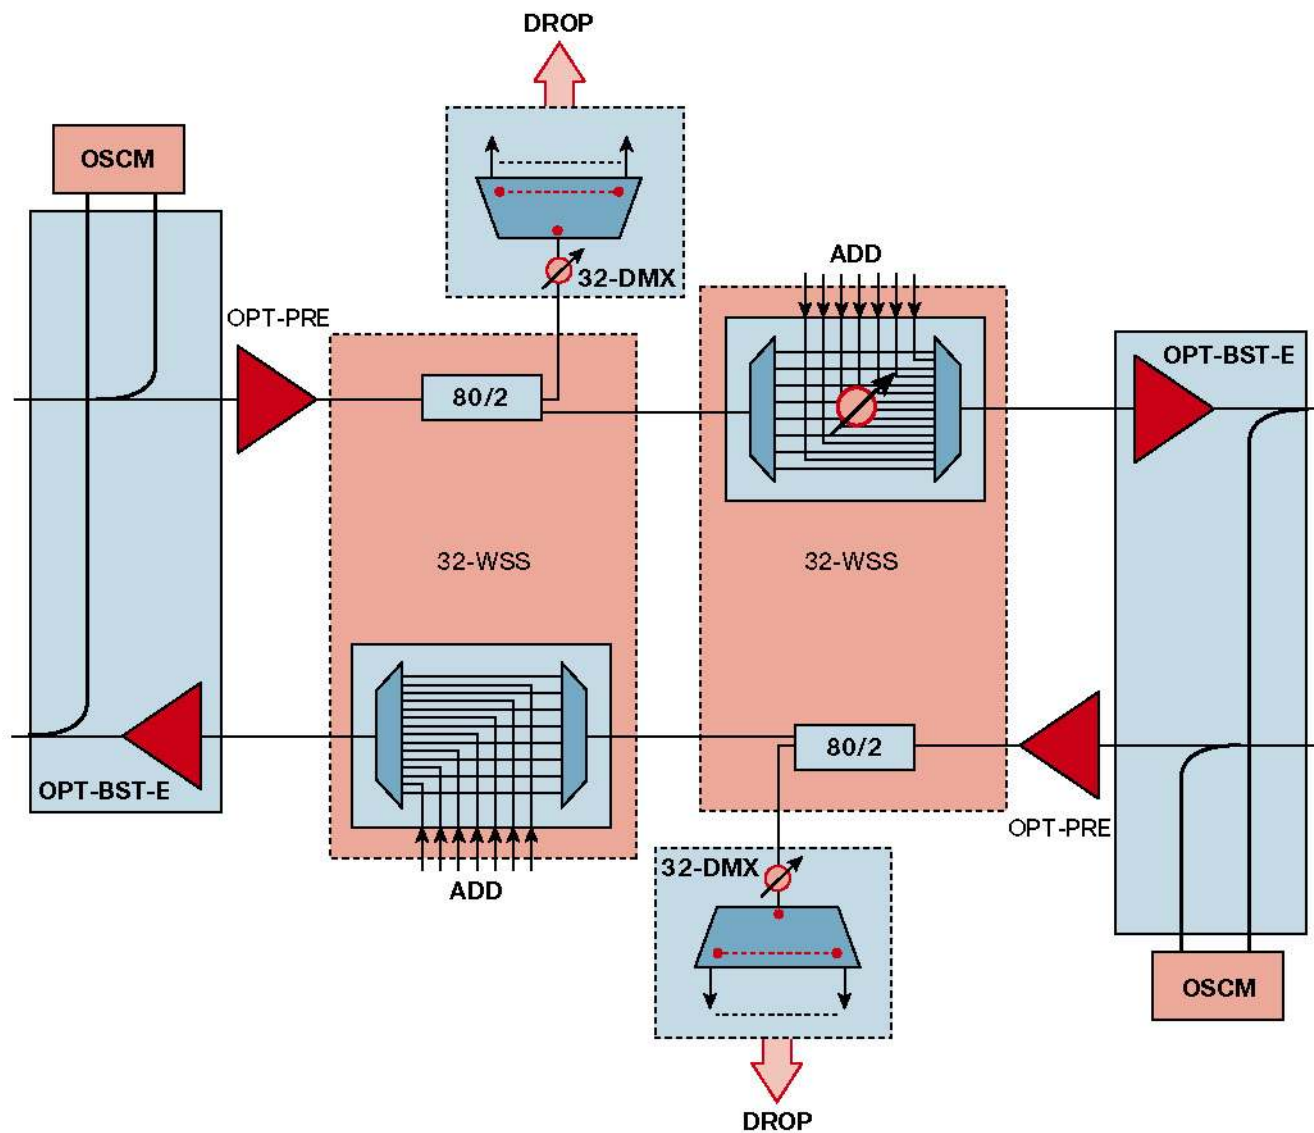


Figure 3
64 Channel ROADM Node


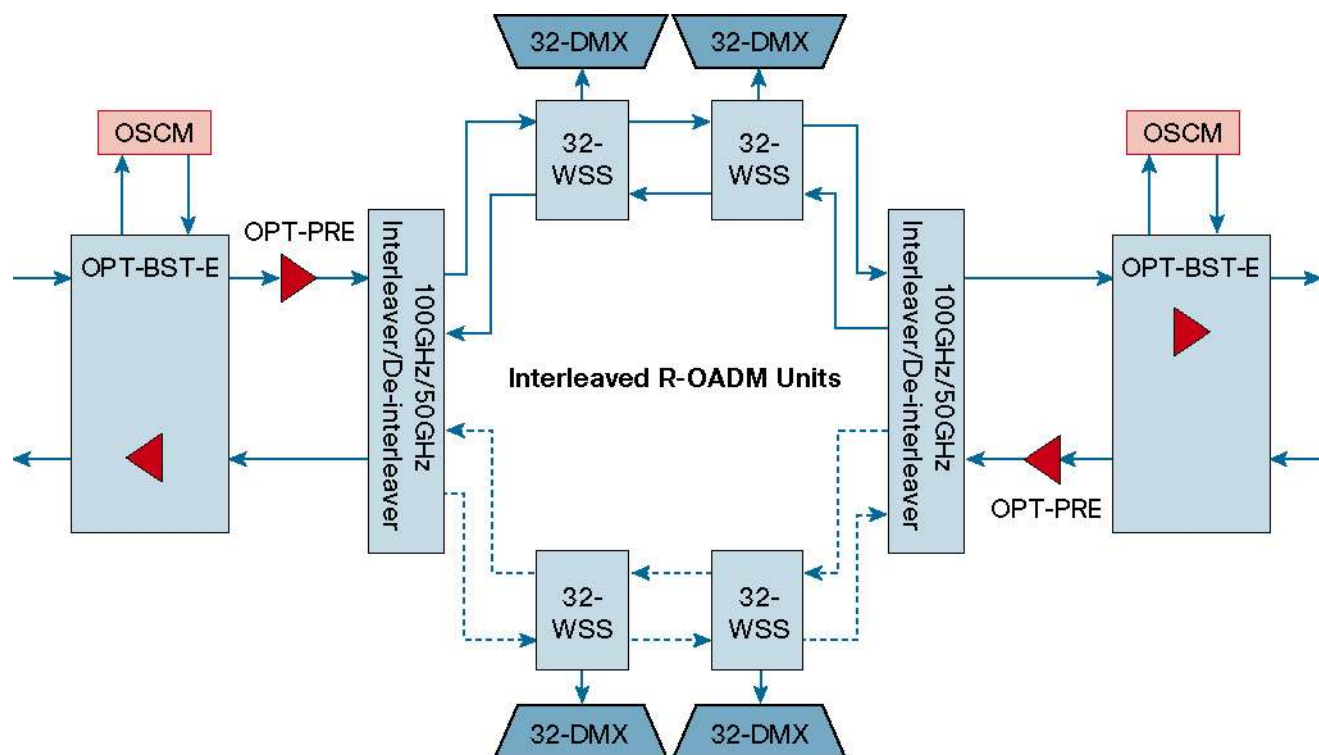


Figure 4
Terminal Node

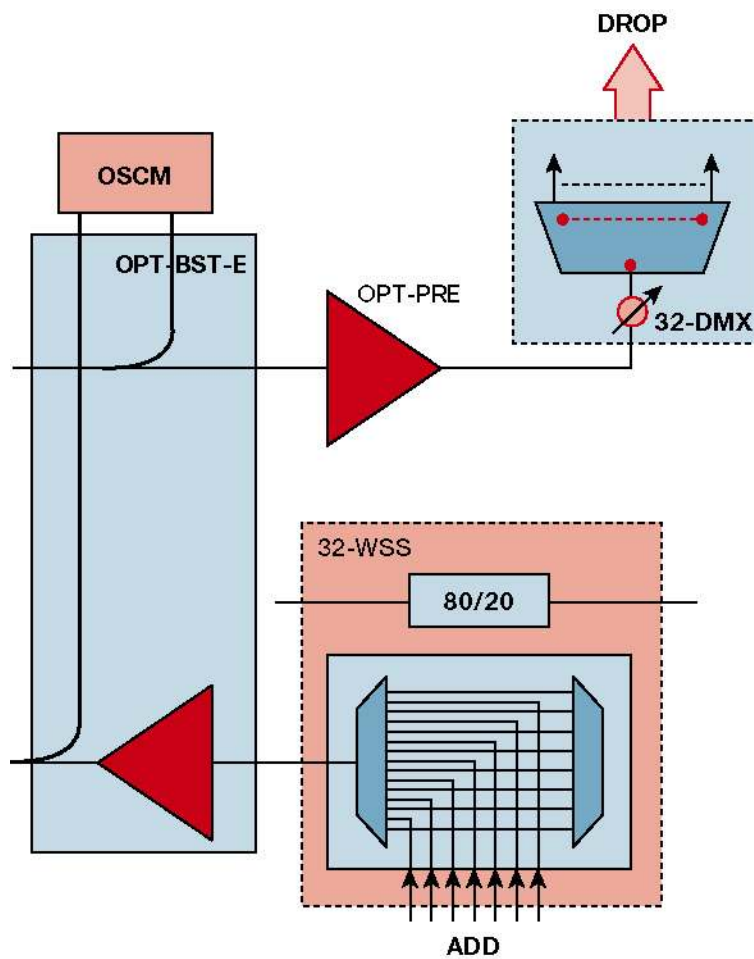

CISCO ONS 15454 ENHANCED BOOSTER AMPLIFIER

Tables 2 through 7 give specifications for the Cisco ONS 15454 enhanced booster amplifier. Figure 5 provides the functional diagrams for the Cisco ONS 15454 enhanced booster amplifier.

Table 2. Regulatory Compliance¹

SONET/ANSI System	SDH/ETSI System
Countries	
• Canada • United States • Mexico • Korea • Japan • European Union	• European Union • Australia • New Zealand • Singapore • China • Mexico • Hong Kong • Korea
EMC emissions (radiated, conducted)	
• ICES-003 • GR-1089-CORE • 47CFR15 • VCCI V-3/2000.04 • CISPR24	• EN 300 386-TC • EN50081-1 • EN55022 • AS/NZS3548, Amendment 1 + 2 1995
EMC immunity	
• GR-1089-CORE • CISPR24 • EN50082-2	• EN300-386-TC • EN55024
Safety	
• CAN/CSA-C22.2 No. 60950-00 Third Ed., 12/1/2002 • GR-1089-CORE • GR-63-CORE • TS001	• UL 60950 Third Ed., 12/1/2000 • EN60950 (to A4) • IEC60950/EN60950, Third Ed. • AS/NZS3260 Supplement 1, 2, 3, 4, 1997
Environmental	
• GR-63-CORE • AT&T Network Equipment Design Specifications (NEDS)	• ETS 300-019 (Class 3.1E) (Note 2)
Structural dynamics	
• GR-63-CORE • AT&T NEDS	• ETS 300-019 (Class 3.1E) (Note 2)
Power and grounding	
• SBC (TP76200MP) • ETS 300-132-1 (DC power)	• ETS 300-253 (grounding)

¹ All compliance testing and documentation may not be completed at release of the product. Check with your sales representative for countries outside of Canada, the United States, and the European Union.

SONET/ANSI System	SDH/ETSI System
Optical	
- GR-253-CORE - G.692	
Quality	
TR-NWT-000332, Issue 4, Method 1 calculation for 20-year mean time between failure (MTBF)	

Table 3. System Requirements

Component	Cisco ONS 15454 SONET/ANSI	Cisco ONS 15454 SDH/ETSI
Processor	TCC2 or TCC2P	TCC2 or TCC2P
Cross-connect	All (not required)	All (not required)
Shelf assembly	15454-SA-ANSI or 15454-SA-HD shelf assembly with FTA3 version fan-tray assembly	15454-SA-ETSI shelf assembly with SDH 48V fan-tray assembly
System software	Release 5.0.2 SONET or later	Release 5.0.2 SDH or later

Table 4. Common Amplifier Specifications

Specification	Enhanced Amplifier
Management	
Card LEDs	
Failure (FAIL)	Red
Signal fail (SF)	Yellow
Operating environment	
Temperature	23 to 131°F (–5 to 55°C)
Humidity	5 to 95% noncondensing
Storage environment	
Temperature	–40 to 185°F (–40 to 85°C)
Humidity	5 to 95% noncondensing

Figure 5
Functional Diagrams for Cisco ONS 15454 Enhanced Optical Booster Amplifier

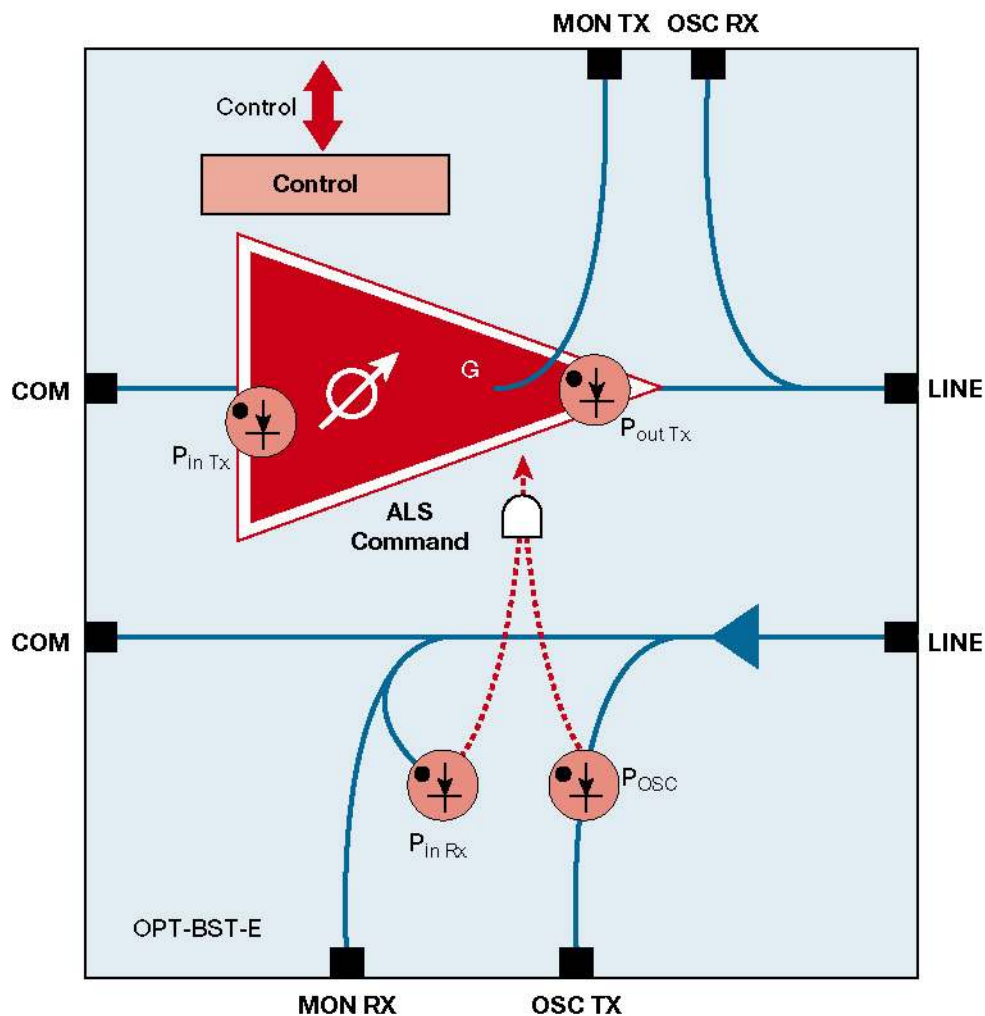


Table 5. Cisco ONS 15454 Optical Booster Amplifier Specifications

Specification	Enhanced Amplifier
Optical parameters	
Input power range (P_{in})	
Full-channel loading	–6 to 12 dBm
1-channel loading	–26 to –8 dBm
Output power (P_{out} maximum)	20.5 dBm
Gain range	
Standard (with tilt control)	8 to 23 dB
Extended (without tilt control)	23 to 26 dB
Gain ripple (peak to valley)	1.8 dB

Specification		Enhanced Amplifier
Gain and power regulation		
Over-/under-shoot		0.5 dB
Noise figure (at gain $\geq$ 23 dB)		5.5 dB
Transient suppression		Refer to Table 6
OSC filter type		Interferential
OSC filter insertion loss		
Drop OSC (maximum)		1.8 dB
Add OSC (maximum)		1.3 dB
OSC filter passband		1500 to 1522 nm
Connectors		
Input/output ports		LC
Monitor ports		LC
Power		
Card power draw		
Typical		30W
Maximum		40W
Physical		
Size		1 slot
Supported shelf slots		1–6, 12–17

Table 6. Cisco ONS 15454 Enhanced Booster Amplifier Transient Suppression Specifications

Input Power Excursion	Undershoot and Overshoot (maximum)	Settling Time (maximum)	Gain Error
15 dB	3.5 dB	500 μ s	0.5 dB
6 dB	0.5 dB	100 μ s	0.5 dB
3 dB	0.5 dB	100 μ s	0.5 dB

ORDERING INFORMATION

Table 7 gives ordering information for the Cisco ONS 15454 enhanced optical booster amplifier.

Table 7. Ordering Information

Part Number	Description
15454-OPT-BST-E=	Enhanced optical booster amplifier, C-band, 64-channel, 50-GHz compatible, LC connector

**Corporate Headquarters**

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters

Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: 31 0 20 357 1000
Fax: 31 0 20 357 1100

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-7660
Fax: 408 527-0883

Asia Pacific Headquarters

Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica
Croatia • Cyprus • Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR
Hungary • India • Indonesia • Ireland • Israel • Italy • Japan • Korea • Luxembourg • Malaysia • Mexico
The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal • Puerto Rico • Romania • Russia
Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan
Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

All contents are Copyright © 1992–2005 Cisco Systems, Inc. All rights reserved. Cisco, Cisco Systems, and the Cisco Systems logo are registered trademarks or trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0502R)
Pa/LW8545 06/05

