

SPEC® CFP2006 Result

Copyright 2006-2013 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2697 v2 @ 2.70 GHz)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 681

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2013

Hardware Availability: Sep-2013

Software Availability: Aug-2013

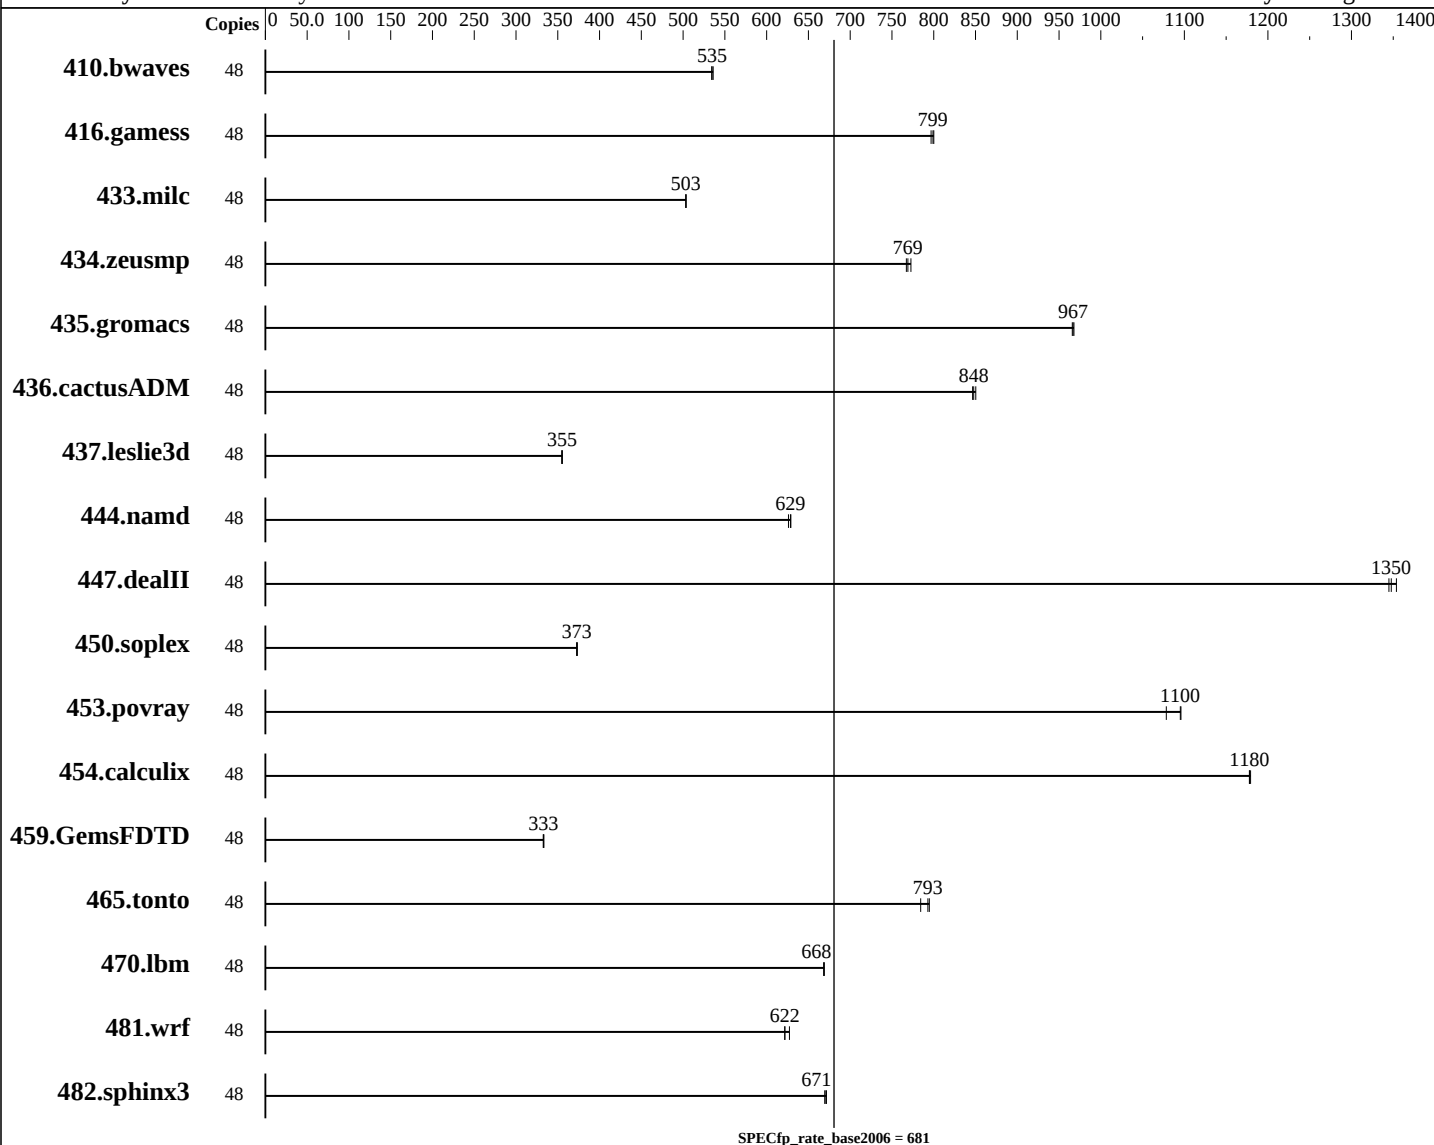

Hardware

CPU Name: Intel Xeon E5-2697 v2
CPU Characteristics: Intel Turbo Boost Technology up to 3.5 GHz
CPU MHz: 2700
FPU: Integrated
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
2.6.32-358.el6.x86_64
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2013 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2697 v2 @ 2.70 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 681

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2013

Hardware Availability: Sep-2013

Software Availability: Aug-2013

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-11, ECC)
Disk Subsystem: 1 X 300GB SAS, 15K RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1221	534	1217	536	<u>1220</u>	<u>535</u>									
416.gamess	48	1175	800	1179	797	<u>1176</u>	<u>799</u>									
433.milc	48	875	504	875	503	<u>875</u>	<u>503</u>									
434.zeusmp	48	565	773	569	767	<u>568</u>	<u>769</u>									
435.gromacs	48	355	966	<u>355</u>	<u>967</u>	354	968									
436.cactusADM	48	678	847	675	850	<u>677</u>	<u>848</u>									
437.leslie3d	48	1270	355	<u>1270</u>	<u>355</u>	1272	355									
444.namd	48	<u>613</u>	<u>629</u>	612	629	615	626									
447.dealII	48	<u>407</u>	<u>1350</u>	408	1340	406	1350									
450.soplex	48	1072	373	1074	373	<u>1074</u>	<u>373</u>									
453.povray	48	233	1100	<u>233</u>	<u>1100</u>	237	1080									
454.calculix	48	336	1180	336	1180	<u>336</u>	<u>1180</u>									
459.GemsFDTD	48	<u>1530</u>	<u>333</u>	1531	333	1528	333									
465.tonto	48	602	784	<u>596</u>	<u>793</u>	594	795									
470.lbm	48	986	669	<u>987</u>	<u>668</u>	987	668									
481.wrf	48	<u>862</u>	<u>622</u>	855	627	863	622									
482.sphinx3	48	<u>1395</u>	<u>671</u>	1393	672	1397	669									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
CPU performance set to HPC
Processor C State set to Disabled

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2013 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2697 v2 @ 2.70 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 681

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2013

Hardware Availability: Sep-2013

Software Availability: Aug-2013

Platform Notes (Continued)

Processor C1E set to Disabled
Processor C6 report set to Disabled
Energy Performance Policy set to Performance
Memory RAS configuration Set to Max-Performance
LV DDR Mode set to Performance-mode
DRAM Refresh Rate Set to 1x

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on B200M3CRCR Thu Aug 29 13:35:54 2013

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2697 v2 @ 2.70GHz
    2 "physical id"s (chips)
    48 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 12
    siblings  : 24
    physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
    physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
  cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      132085336 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux B200M3CRCR 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 28 23:23
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda1        ext4      134G   37G   91G   29% /
```

Additional information from dmidecode:

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2013 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2697 v2 @ 2.70 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 681

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2013

Hardware Availability: Sep-2013

Software Availability: Aug-2013

Platform Notes (Continued)

BIOS Cisco Systems, Inc. B200M3.2.1.2.12.080620131158 08/06/2013

Memory:

16x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1866 MHz 2 rank

8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -noFOR_main

436.cactusADM: -DSPEC_CPU_LP64 -noFOR_main

437.lelie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4

SPEC CFP2006 Result

Copyright 2006-2013 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2697 v2 @ 2.70 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 681

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2013

Hardware Availability: Sep-2013

Software Availability: Aug-2013

Base Portability Flags (Continued)

450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 3 18:35:33 2013 by SPEC CPU2006 PS/PDF formatter v6401.