

SPEC® CINT2006 Result

Copyright 2006-2013 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2667 v2 @ 3.30 GHz)

SPECint®2006 = 68.1

SPECint_base2006 = 63.0

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Sep-2013

Hardware Availability: Oct-2013

Software Availability: Aug-2013

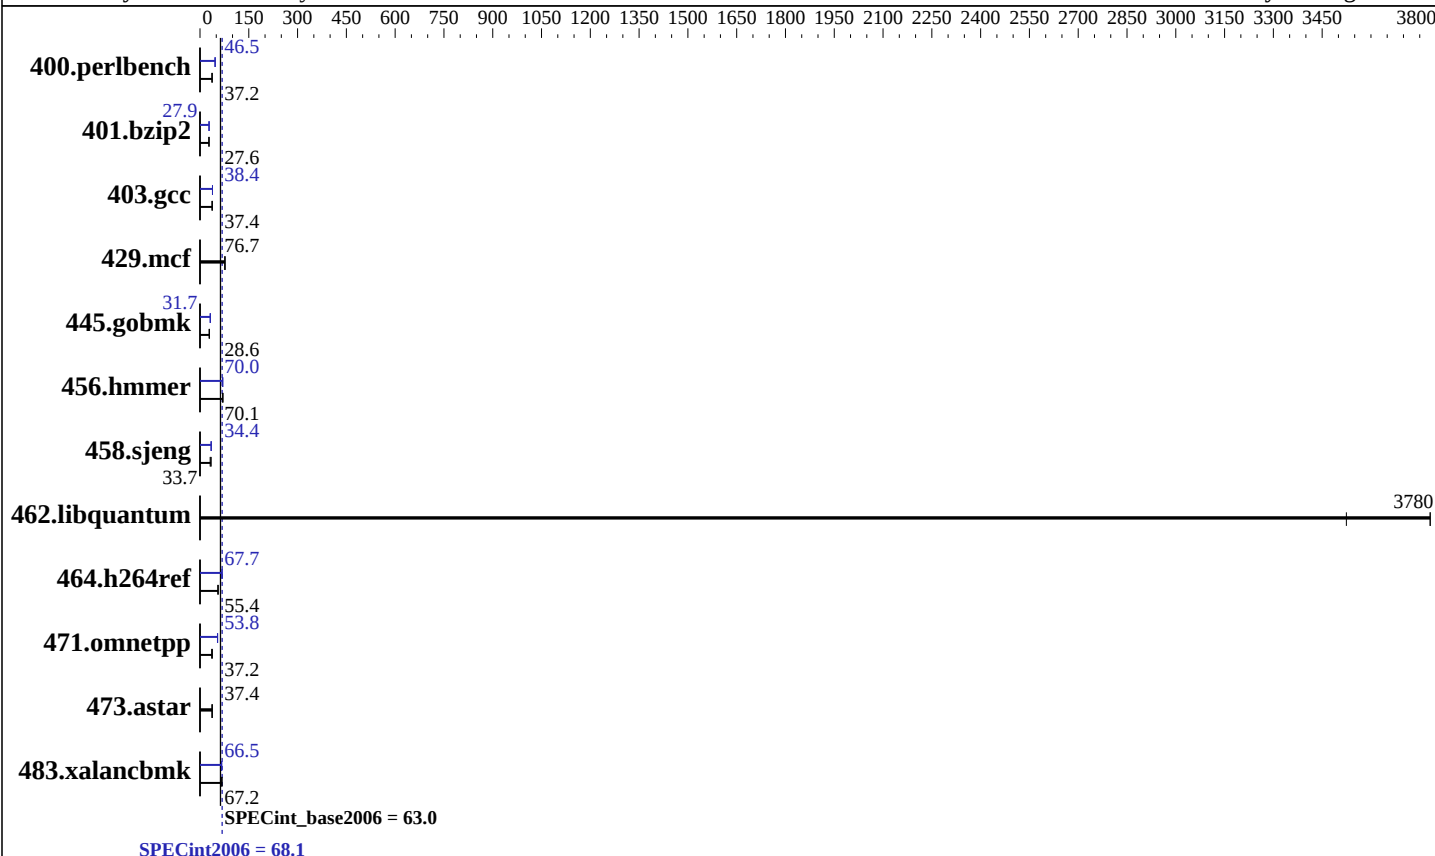

Hardware

CPU Name: Intel Xeon E5-2667 v2
CPU Characteristics: Intel Turbo Boost Technology up to 4.0 GHz
CPU MHz: 3300
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-11, ECC)
Disk Subsystem: 1 X 300 GB SAS, 15K RPM
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
3.0.76-0.11-default
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2013 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2667 v2 @ 3.30 GHz)

SPECint2006 = 68.1

SPECint_base2006 = 63.0

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Sep-2013

Hardware Availability: Oct-2013

Software Availability: Aug-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	263	37.2	<u>263</u>	<u>37.2</u>	264	37.1	210	46.5	<u>210</u>	<u>46.5</u>	210	46.5
401.bzip2	349	27.6	349	27.6	<u>349</u>	<u>27.6</u>	346	27.9	346	27.9	<u>346</u>	<u>27.9</u>
403.gcc	214	37.6	<u>215</u>	<u>37.4</u>	216	37.3	<u>210</u>	<u>38.4</u>	210	38.4	210	38.4
429.mcf	<u>119</u>	<u>76.7</u>	119	76.7	119	76.5	<u>119</u>	<u>76.7</u>	119	76.7	119	76.5
445.gobmk	<u>367</u>	<u>28.6</u>	367	28.6	366	28.7	331	31.7	331	31.6	<u>331</u>	<u>31.7</u>
456.hmmer	<u>133</u>	<u>70.1</u>	133	70.1	133	70.1	133	70.0	<u>133</u>	<u>70.0</u>	135	69.1
458.sjeng	359	33.7	<u>359</u>	<u>33.7</u>	388	31.2	<u>352</u>	<u>34.4</u>	352	34.4	352	34.4
462.libquantum	5.48	3780	5.88	3520	<u>5.48</u>	<u>3780</u>	5.48	3780	5.88	3520	<u>5.48</u>	<u>3780</u>
464.h264ref	400	55.4	<u>399</u>	<u>55.4</u>	398	55.6	327	67.6	327	67.7	<u>327</u>	<u>67.7</u>
471.omnetpp	165	37.8	174	35.9	<u>168</u>	<u>37.2</u>	116	53.7	115	54.3	<u>116</u>	<u>53.8</u>
473.astar	<u>188</u>	<u>37.4</u>	188	37.3	188	37.4	<u>188</u>	<u>37.4</u>	188	37.3	188	37.4
483.xalancbmk	103	67.1	<u>103</u>	<u>67.2</u>	103	67.3	104	66.3	<u>104</u>	<u>66.5</u>	103	66.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Intel HT Technology = Disabled

CPU performance set to HPC

Power Technology set to Custom

CPU Power State C6 set to Enabled

CPU Power State C1 Enhanced set to Disabled

Energy Performance policy set to Performance

Memory RAS configuration set to Maximum Performance

DRAM Clock Throttling Set to Performance

LV DDR Mode set to Performance-mode

DRAM Refresh Rate Set to 1x

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on linux-ygey Sat Aug 31 14:55:05 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2667 v2 @ 3.30GHz

2 "physical id"s (chips)

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2

SPEC CINT2006 Result

Copyright 2006-2013 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2667 v2 @ 3.30 GHz)

SPECint2006 = 68.1

SPECint_base2006 = 63.0

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Sep-2013

Hardware Availability: Oct-2013

Software Availability: Aug-2013

Platform Notes (Continued)

16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 8
physical 0: cores 1 2 3 4 8 9 10 11
physical 1: cores 1 2 3 4 8 9 10 11
cache size : 25600 KB
```

From /proc/meminfo

```
MemTotal:      132099336 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

uname -a:

```
Linux linux-ygey 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 31 11:58 last=S

SPEC is set to: /opt/cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext3	273G	52G	220G	20%	/

Additional information from dmidecode:

BIOS Cisco Systems, Inc. C220M3.1.5.2.27.071120132232 07/11/2013

Memory:

```
16x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1866 MHZ
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"
OMP_NUM_THREADS = "16"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3

SPEC CINT2006 Result

Copyright 2006-2013 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2667 v2 @ 3.30 GHz)

SPECint2006 = 68.1

SPECint_base2006 = 63.0

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Sep-2013

Hardware Availability: Oct-2013

Software Availability: Aug-2013

General Notes (Continued)

echo always > /sys/kernel/mm/transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-wl, -z, muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

SPEC CINT2006 Result

Copyright 2006-2013 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2667 v2 @ 3.30 GHz)

SPECint2006 = 68.1

SPECint_base2006 = 63.0

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Sep-2013

Hardware Availability: Oct-2013

Software Availability: Aug-2013

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

Continued on next page

SPEC CINT2006 Result

Copyright 2006-2013 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2667 v2 @ 3.30 GHz)

SPECint2006 = 68.1

SPECint_base2006 = 63.0

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Sep-2013

Hardware Availability: Oct-2013

Software Availability: Aug-2013

Peak Optimization Flags (Continued)

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Sep 6 12:31:11 2013 by SPEC CPU2006 PS/PDF formatter v6401.