

Catalyst 6500 Virtual Switching 1440: Reduce Operating Expenditures, Protect and Enhance Investment

Innovative Network System Virtualization Technology Redefines Multilayer Network Architecture

What You Will Learn

Virtual Switching System (VSS) technology on Cisco® Catalyst® 6500 Series Switches sets a new standard for IT managers to build resilient, stateful, highly available networks while optimizing network resource usage. VSS will play a major role in data center server access as well as campus and data center distribution/core layer designs.

Challenge

Traditional campus and data center networks are designed with high availability in mind. The primary aspect of high availability is to have redundant hardware components—chassis, supervisors, modules, and links—and redundant protocols—Spanning Tree Protocol, gateway redundancy protocol, and routing. Although this model has worked to a satisfying degree over the years, today's campus and data center operators are facing increasing challenges in managing high numbers of devices and helping ensure deterministic failover times in increasingly complex networks with varied types of new applications, business processes, and requirements. With these new applications such as video comes the demand for more bandwidth. However, most companies' IT budget is not increasing at the same rate, and so IT managers are in a dilemma to satisfy the new requirements.

Business Benefits

Cisco is introducing an innovative technology for the Cisco Catalyst 6500 Series Switches called the Virtual Switching System 1440 (VSS 1440). VSS technology effectively addresses the challenges faced by today's IT manager by simplifying the existing network and leveraging past investments.

VSS technology provides the following benefits:


- VSS simplifies network complexity and management overhead by 50 percent, thus increasing operational efficiency and lowering operating expenses (OpEx).
- VSS provides deterministic sub-200-ms stateful convergence, resulting in no disruption to application or business.
- VSS maximizes the available bandwidth in the already installed network infrastructure, increasing return on investment (ROI) and reducing additional capital expenditures (CapEx) to add capacity.

Solution: Virtual Switching System 1440 Technology Overview

The VSS 1440 is a feature on the Cisco Catalyst 6500 Series Switches that effectively allows the clustering of two physical chassis into a single logically managed entity. Figure 1 provides a

graphical representation of this concept where two Cisco Catalyst 6509-E Switch chassis can be managed as a single virtual 18-slot chassis after VSS has been enabled.


Figure 1. Virtual Switching System 1440

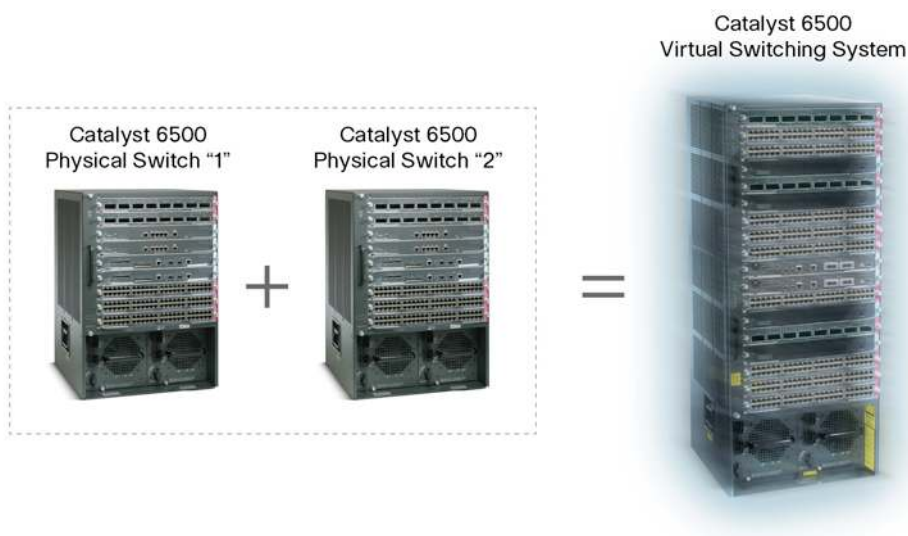

The Virtual Switching System acts as a single entity from the network control plane and management perspective. As such, VSS appears as a single logical switch or router to the neighboring devices.

From a data plane and traffic forwarding perspective, both switches (Figure 2) in the Virtual Switching System are actively forwarding traffic. The VSS has 800+ Mpps of IPv4 unicast lookup performance. The switch fabrics of both switches are also in an active state, allowing the VSS to achieve aggregate switch fabric capacity of 1.44 Tbps. The Virtual Switch Link (VSL) that connects the physical switches is a standard 10 Gigabit Ethernet EtherChannel[®] link and is used to carry control traffic between the switches (<5 percent of a 10 Gigabit Ethernet link) in addition to user traffic. A VSL can be configured with up to 8 10 Gigabit Ethernet connections, but typically 2 10 Gigabit Ethernet links are sufficient for redundancy. Each switch actively forwards traffic and does not depend on the bandwidth of the VSL to get full 1.44 Tbps throughput. In addition, an administrator can provision additional links between the two switches if required.

Figure 2. Virtual Switching System 1440 Redundancy State

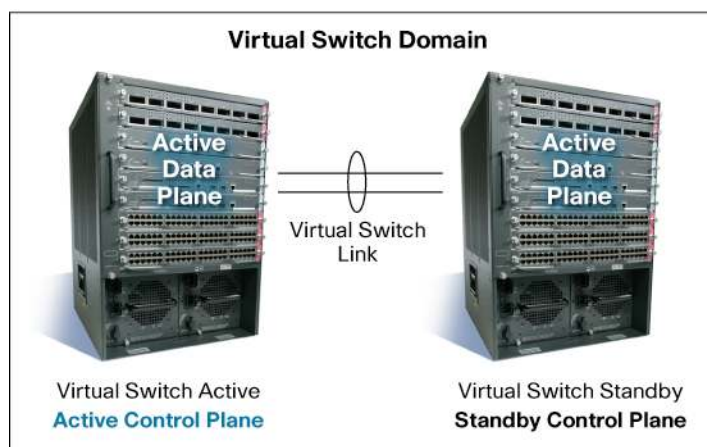

VSS 1440 (Figure 3) simplifies network complexity and management overhead by 50 percent:

- VSS 1440 is managed using a single point of management through the active virtual switch member. The number of devices that need to be managed by Simple Network Management Protocol [SNMP] is reduced by 50 percent.
- VSS 1440 has a single combined configuration file for both virtual switch members, and VSS allows configuration of both the switches from a single management interface (using a CLI or SNMP).
- Policy changes or configuration file changes has additional overhead in the traditional model with two separate points of management. The network operator has to manually synchronize both the devices, and it is prone to errors. In VSS 1440, any update is synchronized between the two physical switches.
- Gateway redundancy protocols such as Virtual Router Redundancy Protocol/Hot Standby Router Protocol (VRRP/HSRP) are required to help ensure a smooth first hop gateway address for the hosts. These protocols have the following weaknesses:
 - Three separate IP address per subnet (one for active router, one for standby router, and one for virtual IP address)
 - Overhead of configuring the protocol parameters
 - Convergence time of these protocols varies depending on the number of instances of these protocols configured in a system

VSS has a single gateway IP address and offers full first hop redundancy. With VSS, configuration is not only greatly simplified; it also eliminates the need for these gateway redundancy protocols and the associated overhead of these protocols.

- Multichassis EtherChannel® (Figure 4) creates simplified loop-free topologies, eliminating the dependency on Spanning Tree Protocol.

Figure 3. VSS 1440 Loop-Free Physical Topology Compared to Traditional Network


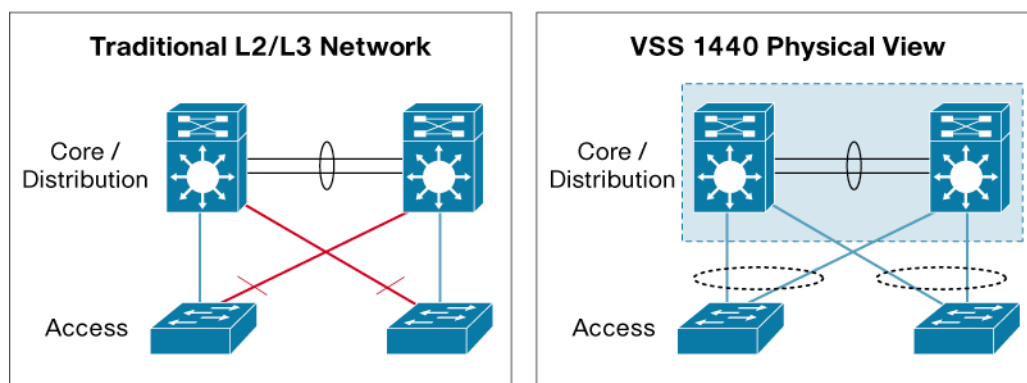


Figure 4. VSS 1440 Loop-Free Logical View with Multichassis EtherChannel

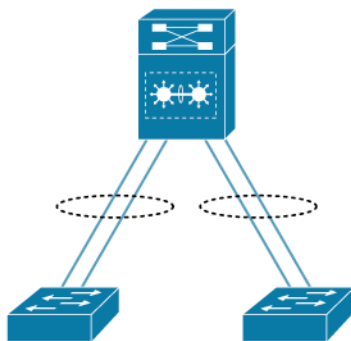

VSS 1440 provides deterministic sub-200-ms stateful convergence:


- In a VSS, a virtual switch member failure results in an interchassis stateful failover with no disruption to applications that rely on network state information. VSS eliminates Layer 2/Layer 3 protocol reconvergence if a virtual switch member fails, resulting in deterministic, sub-200-ms stateful virtual switch recovery. Unlike VSS, the traditional network design does not offer deterministic convergence times as the convergence depends on the following parameters:
 - Gateway protocol convergence (HSRP/VRRP state changes)
 - Routing protocol reconvergence (Open Shortest Path First/Enhanced Interior Gateway Routing Protocol [OSPF/EIGRP] routing process)
 - Spanning Tree Protocol topology convergence (root changes to the standby switch)
 - Number of VLANs or subnets, because multiple protocol convergence is unpredictable and in the range of few seconds
- VSS utilizes EtherChannel (802.3ad or PAgP or Manual ON mode) for deterministic, sub-second Layer 2 link recovery, unlike convergence based on Spanning Tree Protocol in a traditional network design. Spanning Tree Protocol requires the blocking port to go forwarding if the active link fails, and depending on the number of VLANs, the blocked link time to forward may be varied. With VSS, all links are forwarding at all times, and loss of one of the uplinks just represents a loss of link in EtherChannel. Traffic going through the still active link continues to get forwarded with no disruption, while the traffic that was sent on the now failed link is sent over the remaining active link(s). (Cisco allows up to 8 links in an EtherChannel bundle.)

VSS maximizes the available bandwidth in an already installed network infrastructure:

- VSS activates all available Layer 2 bandwidth across redundant Cisco Catalyst 6500 Series Switches. VSS also maximizes the link utilization on these connections with even and granular load balancing based on Cisco EtherChannel or standards-based 802.3ad protocol. In traditional networks, Spanning Tree Protocol blocks ports to prevent loops. The blocked ports are not utilized. An advanced design with Spanning Tree Protocol involves VLAN-based load balancing, which still does not evenly load balance the links in a typical campus network.
- VSS allows standards-based link aggregation (802.3ad) for server network interface card (NIC) teaming across redundant data center switches, maximizing server bandwidth throughput. Traditional NIC vendor-based teaming has the following deficiencies:
 - NIC vendor proprietary feature


- Usually only active/standby model: standby link not utilized
- Send-on-many and receive-on-one NIC teaming does not allow bidirectional utilization of links (Figure 5) and cannot be configured across redundant data center switches (two physical switches)

Figure 5. VSS 1440 Allows Bidirectional Bandwidth Usage with 802.3ad

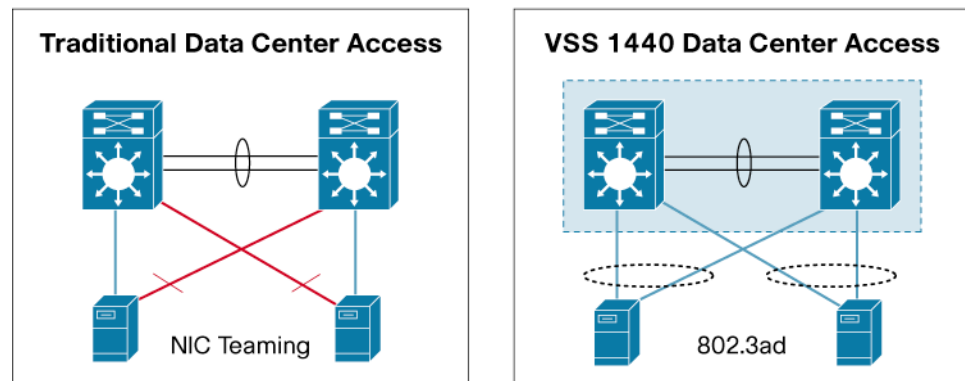

- VSS eliminates unicast flooding issues typically seen in the traditional Layer 2/Layer 3 network because of VLAN load-balancing schemes using First Hop Redundancy Protocol (FHRP)/Spanning Tree Protocol, resulting in asymmetrical routing. VSS 1440 synchronizes the state of Address Resolution Protocol (ARP) and MAC address tables between the two chassis, thus eliminating unicast flooding caused by asymmetrical routing.
- VSS reduces latency and bandwidth usage by optimally routing intracampus or intra-data center traffic with least number of hops (Figure 6). VSS selects the direct link to destination as all links are forwarding. In the traditional Layer 2/Layer 3 topology, inter-VLAN routing can result in extra hop and wasted bandwidth caused by Spanning Tree Protocol blocked ports.

Figure 6. VSS 1440 Reduces Distribution Layer Switching Latency by 50 Percent

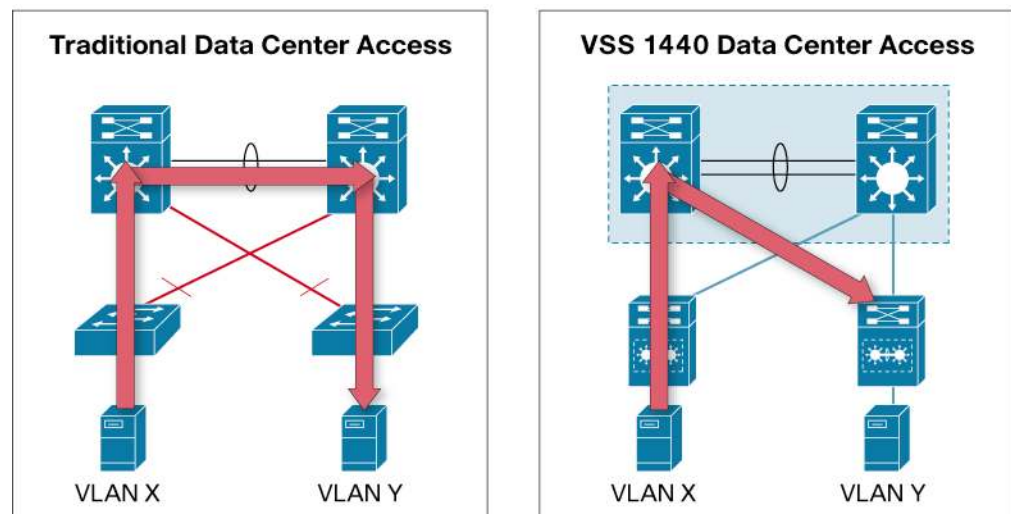


Transitioning to VSS 1440 from a Traditional Multilayer Network

Now that we have seen the benefits of VSS individually, we will explore converting a traditional multilayer network into a VSS network and briefly reiterate some of the benefits of VSS in this network.

Figure 7 shows a typical multilayer network with the distribution layer being the Layer 2–Layer 3 demarcation layer. The network runs Spanning Tree Protocol to maintain loop-free topologies (using blocked ports), and FHRP protocols such as HSRP are run to maintain gateway redundancy. Routing peers exist between the two distribution layer switches, and both distribution layer switches peer with each of the core layer switches. Load-sharing is achieved through VLAN load balancing between the access and distribution layer switch and using Equal Cost Multipathing (ECMP) between the distribution and core layers. Failover is achieved using Spanning Tree Protocol, FHRP, and routing protocol timers but is not deterministic because of the complexity and scale of the network.

Figure 7. Traditional Multilayer Network

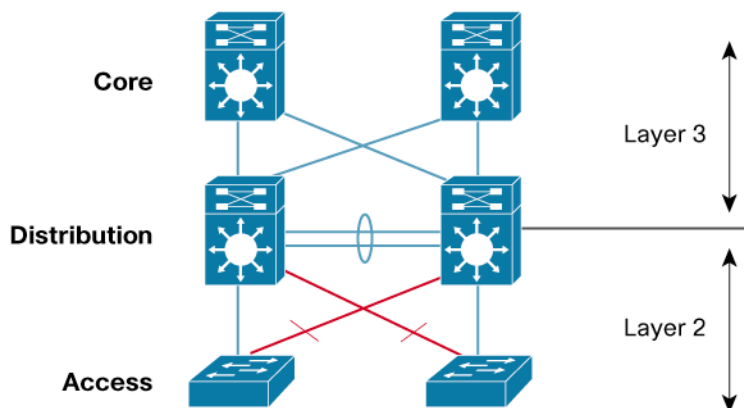

Following are deployment considerations to transition to VSS 1440:

- **Hardware requirements:** The Virtual Switching Supervisor 10GE (VS-S720-10G-3C or VS-S720-10G-3CXL) is needed on both the virtual switch members. While in VSS mode, initial software release supports all existing Cisco Catalyst 6700 Series Switch Ethernet modules and Network Analysis Module (NAM) 1 and 2 service modules in a Cisco Catalyst 6500-E and 6500 Series chassis. Future software releases will add support to additional service modules.
- **Software requirements:** VSS is supported in Cisco IOS® Software or Cisco IOS Software with modularity starting with Release 12.2(33)SXH1. VSS supports all software features in the initial release except for Multiprotocol Label Switching (MPLS)/IPv6 features. Future software releases will add support for MPLS and IPv6 features.
- **Network device requirement:** Any network device can connect to VSS 1440. To maintain high availability of the attached devices, we recommend that the device be dual attached to both VSS members. Singly attached devices are supported. Multichassis EtherChannel is supported in either IEEE 802.3ad (Link Aggregation Control Protocol [LACP]), Cisco PAgP, or manual ON mode.

- **Converting to VSS mode considerations:** If it is a new install, convert the standalone switches to VSS and perform the needed configuration. If you are converting from an existing production network to VSS, plan a maintenance window to convert the existing two standalone switches to a combined VSS switch. The network configuration becomes much simpler when you convert to VSS mode from the traditional network; however, those configuration changes are not automatically performed and are the responsibility of the administrator. Remember to configure Multichassis EtherChannel on any relevant attached devices. Configuring Multichassis EtherChannel is exactly same as configuring traditional EtherChannel.
- **High-availability considerations:** To maintain high availability of the attached devices, we recommend that the device be dual attached to both VSS members. Singly attached devices are supported but will lose connectivity when the switch to which they are attached fails. In the initial release of software, only a single supervisor per chassis is supported. Dual supervisor per VSS member is planned for future software release.
- **Image upgrade considerations:** VSS supports both Cisco IOS Software and Cisco IOS Software with modularity. Patching in Cisco IOS Software modularity can be performed in service, assuming all devices are dual-homed and connectivity is maintained. Full-image Cisco IOS Software upgrade, however, requires you to allocate for up to 1 minute downtime for the VSS. This restriction will be removed in a future software release.

Figure 8 shows the same topology with VSS 1440 deployed in the distribution layer. Benefits of this architecture include loop-free topology, full use of the available bandwidth with Multichassis EtherChannel, elimination of protocols such as Spanning Tree Protocol and FHRP, fewer routing peers (only one peer to the core layer), and a single point of management and policy control. The failover is deterministic and can be sub-200-ms because of reliance on Nonstop Forwarding/Stateful Switchover (NSF/SSO) between the two chassis. Any failover is stateful, thereby not disrupting applications flowing through the distribution layer network.

Figure 8. VSS 1440 Deployed in the Distribution Layer

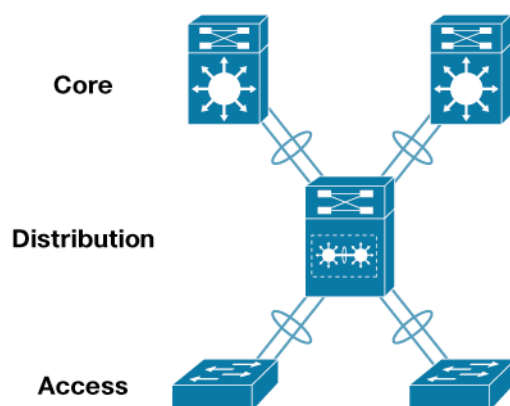


Figure 9 shows the same topology, but now the core layer is also deployed as VSS 1440. In addition to the previous benefits, there are now a single point of management for the core layer, a simplified network topology, and deterministic core failover. Reliance on EtherChannel load balancing improves the load sharing as compared to ECMP.

Figure 9. VSS 1440 Deployed in the Core and Distribution Layer


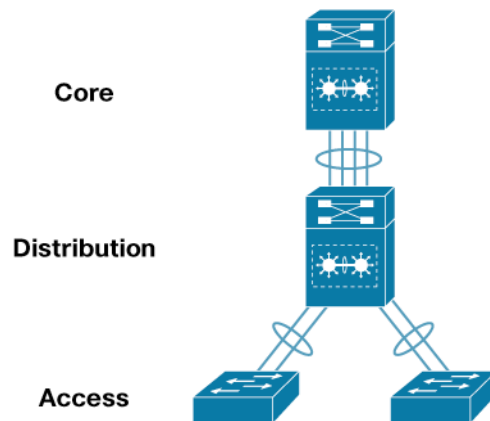


Figure 10 shows the topology in a data center deployment where the VSS 1440 allows servers to be connected to the Cisco Catalyst 6500 using 802.3ad standards-based LACP. Unlike the proprietary NIC teaming protocols, LACP allows bidirectional use of bandwidth on the NICs of the server and provides switch redundancy in a data center. If one of the switches or links fails, the second active link will continue to forward traffic. VSS 1440 at the access layer provides a single point of management, simplified topology, and Layer 2 topology scalability with Spanning Tree Protocol elimination.

Figure 10. VSS Deployed in the Core, Distribution, and Server Access in a Data Center Network

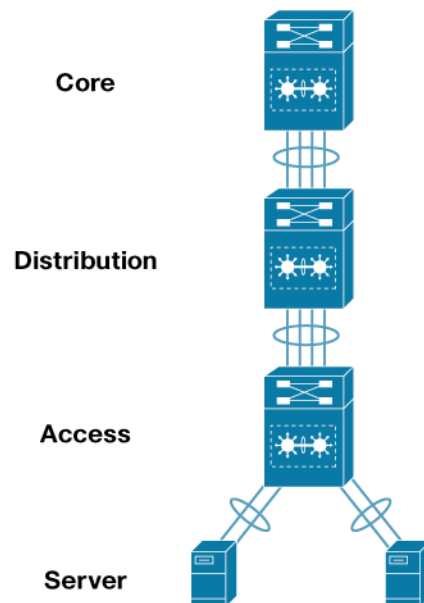

Why Cisco?

Cisco provides intelligent networking solutions that better enable real-time applications. The Cisco Catalyst 6500 VSS 1440 is an innovative network system virtualization technology providing tremendous benefits in any layer of the network. These benefits include a simplified topology, simplified management, deterministic sub-200-ms failover, doubling of uplink bandwidth with existing infrastructure, and superior investment protection.

For More Information

For more information about the Cisco Catalyst 6500 Virtual Switching System 1440, visit <http://www.cisco.com/go/vss>.



Americas Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Europe Headquarters
Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: +31 0 800 020 0791
Fax: +31 0 20 357 1100

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

©2007 Cisco Systems, Inc. All rights reserved. CCVP, the Cisco logo, and Welcome to the Human Network are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn is a service mark of Cisco Systems, Inc.; and Access Registrar, Aironet, BPX, Catalyst, CCDA, CCDR, CCIE, CCIP, CCNA, CCNP, CCSP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, LightStream, Linksys, MeetingPlace, MGX, Networkers, Networking Academy, Network Registrar, PIX, ProConnect, ScriptShare, SMARTnet, StackWise, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0710R)