



## CHAPTER 4

# Configuring Interface Buffers

---

Fibre Channel interfaces use buffer credits to ensure all packets are delivered to their destination. This chapter describes the different buffer credits available on the Cisco MDS 9000 Family switches and modules, and includes the following topics:

- [About Buffer-to-Buffer Credits, page 4-1](#)
- [Configuring Buffer-to-Buffer Credits, page 4-2](#)
- [About Performance Buffers, page 4-3](#)
- [Configuring Performance Buffers, page 4-3](#)
- [Buffer Pools, page 4-3](#)
- [BB\\_Credit Buffers for Switching Modules, page 4-6](#)
- [BB\\_Credit Buffers for Fabric Switches, page 4-16](#)
- [About Extended BB\\_Credits, page 4-18](#)
- [Configuring Extended BB\\_credits, page 4-20](#)
- [Enabling Buffer-to-Buffer Credit Recovery, page 4-21](#)
- [Enabling Buffer-to-Buffer State Change Number, page 4-21](#)
- [Configuring Receive Data Field Size, page 4-22](#)
- [Displaying BB\\_Credit Information, page 4-22](#)

## About Buffer-to-Buffer Credits

Buffer-to-buffer credits (BB\_credits) are a flow-control mechanism to ensure that Fibre Channel switches do not run out of buffers, so that switches do not drop frames. BB\_credits are negotiated on a per-hop basis.

The receive BB\_credit (fcrxbbcredit) value may be configured for each Fibre Channel interface. In most cases, you do not need to modify the default configuration.

The receive BB\_credit values depend on the module type and the port mode, as follows:

- For 16-port switching modules and full rate ports, the default value is 16 for Fx mode and 255 for E or TE modes. The maximum value is 255 in all modes. This value can be changed as required.
- For 32-port switching modules and host-optimized ports, the default value is 12 for Fx, E, and TE modes. These values cannot be changed.
- For Generation 2 and Generation 3 switching modules, see the [“Buffer Pools” section on page 4-3](#).

***Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)***

**Note**

In the Cisco MDS 9100 Series switches, the groups of ports on the left outlined in white are in dedicated rate mode. The other ports are host-optimized. Each group of 4 host-optimized ports have the same features as for the 32-port switching module.

## Configuring Buffer-to-Buffer Credits

To configure BB\_credits for a Fibre Channel interface, follow these steps:

	Command	Purpose
Step 1	switch# <b>config t</b> switch(config)#	Enters configuration mode.
Step 2	switch(config)# <b>interface fc1/1</b> switch(config-if)#	Selects a Fibre Channel interface and enters interface configuration submode.
Step 3	switch(config-if)# <b>switchport fcrxbbcredit default</b>	Applies the default operational value to the selected interface. The operational value depends on the port mode. The default values are assigned based on the port capabilities.
	switch(config-if)# <b>switchport fcrxbbcredit 5</b>	Assigns a BB_credit of 5 to the selected interface. The range to assign BB_credits is between 1 and 255.
	switch(config-if)# <b>switchport fcrxbbcredit 5 mode E</b>	Assigns this value if the port is operating in E or TE mode. The range to assign BB_credits is between 1 and 255.
	switch(config-if)# <b>switchport fcrxbbcredit 5 mode Fx</b>	Assigns this value if the port is operating in F or FL mode. The range to assign BB_credits is between 1 and 255.
Step 4	switch(config-if)# <b>do show int fc1/1</b>	Displays the receive and transmit BB_credit along with other pertinent interface information for this interface.  <b>Note</b> The BB_credit values are correct at the time the registers are read. They are useful to verify situations when the data traffic is slow.

This example shows the output of the **show int fc1/1** command:

```
intfc1/1 is up
...
  16 receive B2B credit remaining
  3 transmit B2B credit remaining
```

[Send documentation comments to mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)

## About Performance Buffers

Regardless of the configured receive BB\_credit value, additional buffers, called performance buffers, improve switch port performance. Instead of relying on the built-in switch algorithm, you can manually configure the performance buffer value for specific applications (for example, forwarding frames over FCIP interfaces).



### Note

Performance buffers are not supported on the Cisco MDS 9148 Fabric Switch, Cisco MDS 9124 Fabric Switch, the Cisco Fabric Switch for HP c-Class BladeSystem, and the Cisco Fabric Switch for IBM BladeCenter.

For each physical Fibre Channel interface in any switch in the Cisco MDS 9000 Family, you can specify the amount of performance buffers allocated in addition to the configured receive BB\_credit value.

The default performance buffer value is 0. If you set the performance buffer value to 0, the built-in algorithm is used. If you do not specify the performance buffer value, 0 is automatically used.

The default performance buffer value is 0. If you use the **default** option, the built-in algorithm is used. If you do not specify this command, the **default** option is automatically used.

## Configuring Performance Buffers

To configure performance buffers for a Fibre Channel interface, follow these steps:

	Command	Purpose
Step 1	switch# <b>config t</b>	Enters configuration mode.
Step 2	switch(config)# <b>interface fc1/1</b> switch(config-if)#	Selects a Fibre Channel interface and enters interface configuration submenu.
Step 3	switch(config-if)# <b>switchport fcrxbcredit performance-buffers 45</b>	Assigns a performance buffer of 45 to the selected interface. The value ranges from 1 to 145.
	switch(config-if)# <b>switchport fcrxbcredit performance-buffers default</b>	Reverts to the factory default of using the built-in algorithm.



### Note

Use the **show interface bbcredit** command to display performance buffer values and other BB\_credit information.

## Buffer Pools

In the architecture of Generation 2 and Generation 3 modules, receive buffers shared by a set of ports are called *buffer groups*. The receive buffer groups are organized into *global* and *local* buffer pools.

The receive buffers allocated from the global buffer pool to be shared by a port group are called a *global receive buffer pool*. Global receive buffer pools include the following buffer groups:

- Reserved internal buffers
- Allocated BB\_credit buffers for each Fibre Channel interface (user configured or assigned by default)

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

- Common unallocated buffer pool for BB\_credits, if any, to be used for additional BB\_credits as needed
- Performance buffers (only used on 12-port 4-Gbps and 4-port 10-Gbps switching modules)



**Note**

The 48-port and 24-port 8-Gbps modules have *dual global buffer pools*. Each buffer pool in the 48-port modules support 24 ports and in the 24-port modules each buffer pool supports 12 ports.

Figure 4-1 shows the allocation of BB\_credit buffers on line cards (24-port and 48-port 4-Gbps line cards).

**Figure 4-1 Receive Buffers for Fibre Channel Ports in a Global Buffer Pool**


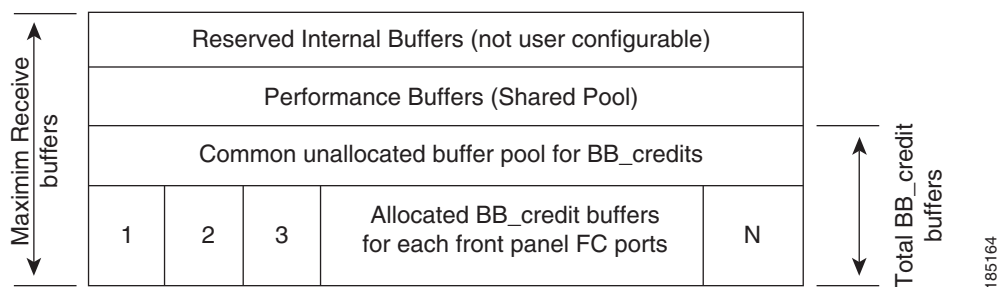


Figure 4-2 shows the default BB\_credit buffer allocation model for 48-port 8-Gbps switching modules. The minimum BB\_credits required to bring up a port is two buffers.

**Figure 4-2 BB\_Credit Buffer Allocation in 48-Port 8-Gbps Switching Modules**

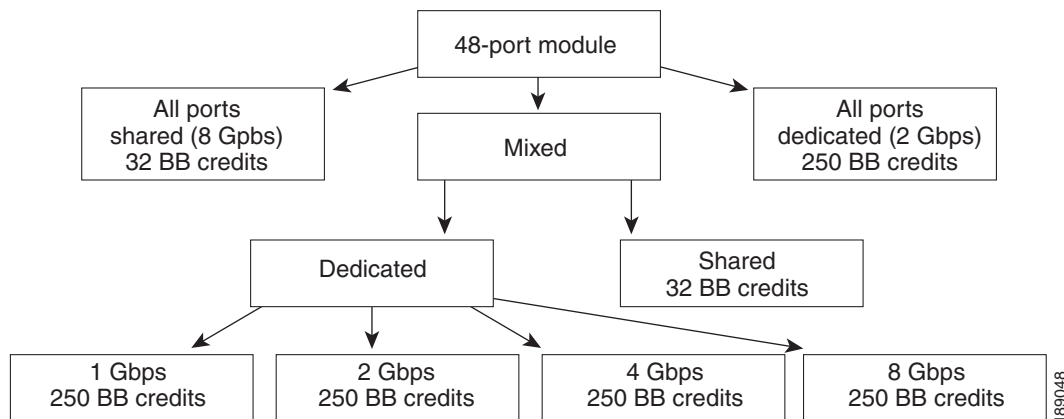

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

Figure 4-3 shows the default BB\_credit buffer allocation model for 24-port 8-Gbps switching modules. The minimum BB\_credits required to bring up a port is two buffers.

**Figure 4-3 BB\_Credit Buffer Allocation in 24-Port 8-Gbps Switching Modules**


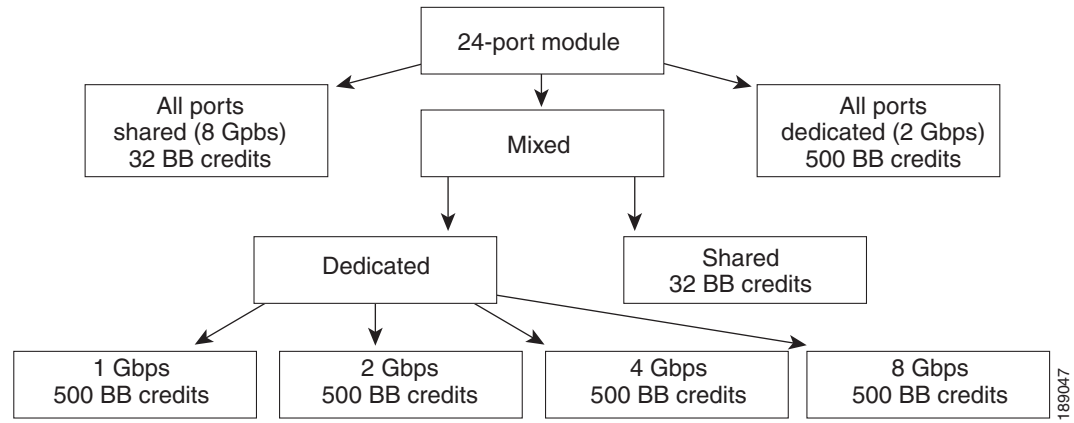


Figure 4-4 shows the default BB\_credit buffer allocation model for 4/44-port 8-Gbps host-optimized switching modules. The minimum BB\_credits required to bring up a port is two buffers.


**Figure 4-4 BB\_Credit Buffer Allocation in 4/44-Port 8-Gbps Switching Modules**

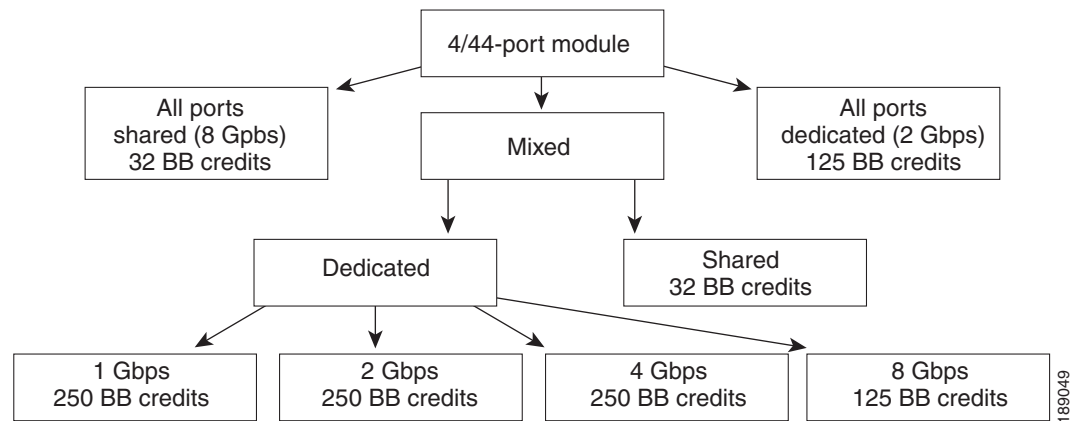

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

Figure 4-5 shows the default BB\_credit buffer allocation model for 24-port 4-Gbps switching modules. The minimum BB\_credits required to bring up a port is two buffers.

**Figure 4-5 BB\_Credit Buffer Allocation in 24-Port 4-Gbps Switching Modules**

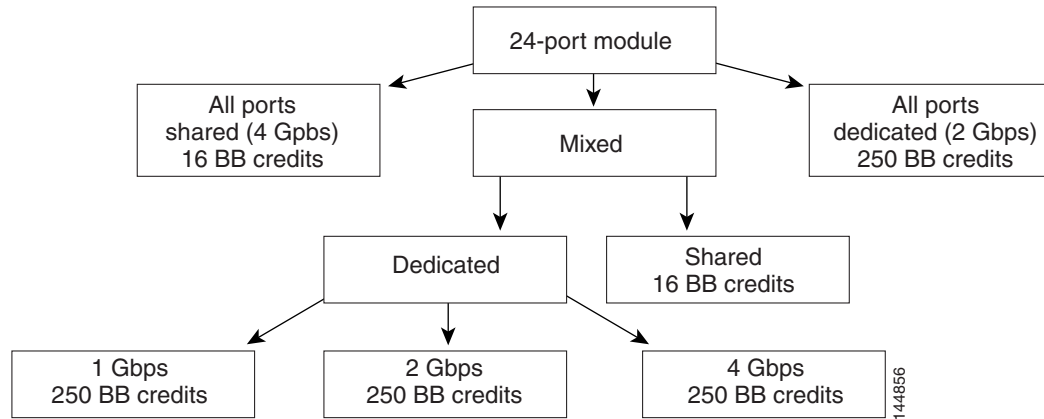

**Note**

The default BB\_credit buffer allocation is the same for all port speeds.

## BB\_Credit Buffers for Switching Modules

This section describes how buffer credits are allocated to Cisco MDS 9000 switching modules, and includes the following topics:

- [Configuring Buffer Credits on a Generation 2 or Generation 3 Module, page 4-6](#)
- [48-Port 8-Gbps Fibre Channel Module BB\\_Credit Buffers, page 4-7](#)
- [24-Port 8-Gbps Fibre Channel Module BB\\_Credit Buffers, page 4-8](#)
- [4/44-Port 8-Gbps Host-Optimized Fibre Channel Module BB\\_Credit Buffers, page 4-9](#)
- [48-Port 4-Gbps Fibre Channel Module BB\\_Credit Buffers, page 4-10](#)
- [24-Port 4-Gbps Fibre Channel Module BB\\_Credit Buffers, page 4-12](#)
- [18-Port Fibre Channel/4-Port Gigabit Ethernet Multiservice Module BB\\_Credit Buffers, page 4-13](#)
- [4-Port 10-Gbps Switching Module BB\\_Credit Buffers, page 4-15](#)

## Configuring Buffer Credits on a Generation 2 or Generation 3 Module

When you configure port mode to auto or E on a Generation 2 module, one of the ports will not come up for the following configuration:

- Port Mode: auto or E for all of the ports
- Rate Mode: dedicated
- Buffer Credits: default value

When you configure port mode to auto or E on a Generation 3 module, one or two of the ports will not come up for the following configuration:

***Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)***

- Port Mode: auto or E for the first half of the ports, the second half of the ports or for all of the ports
- Rate Mode: dedicated
- Buffer Credits: default value

When you configure port mode to auto or E for all ports in the global buffer pool, you need to reconfigure buffer credits on one or more of the ports. The total number of buffer credits configured for all the ports in the global buffer pool should be reduced by 64.

## 48-Port 8-Gbps Fibre Channel Module BB\_Credit Buffers

Table 4-1 lists the BB\_credit buffer allocation for the 48-port 8-Gbps Fibre Channel switching module.

**Table 4-1 48-Port 8-Gbps Switching Module BB\_Credit Buffer Allocation**

BB_Credit Buffer Allocation	BB_Credit Buffers Per Port		
	Dedicated Rate Mode 8-Gbps Speed		Shared Rate Mode 8-Gbps Speed
	ISL	Fx Port	Fx Port
Default BB_credit buffers	250	32	32
Maximum BB_credit buffers	500	500	32
<b>Total Number of BB_Credit Buffers per Module</b>			
Ports 1 through 24	6000		
Ports 25 through 48	6000		

The following guidelines apply to BB\_credit buffers on 48-port 8-Gbps Fibre Channel switching modules:

- BB\_credit buffers allocated for ports 1 through 24 and 25 through 48 can be a maximum of 6000 each so that the load is distributed.
- BB\_credit buffers for ISL connections can be configured from a minimum of 2 buffers to a maximum of 500 buffers for dedicated rate mode.
- BB\_credit buffers for Fx port mode connections can be configured. The minimum is 2 buffers and the maximum of 500 buffers for dedicated rate mode or 32 buffers for shared rate mode.
- Performance buffers are not supported on this module.

Each port group on the 48-port 8-Gbps Fibre Channel switching module consists of six ports. The ports in shared rate mode in a port group can have a maximum bandwidth oversubscription of 10:1 considering that each port group has 12.8-Gbps bandwidth.

The following example configurations are supported by the 48-port 8-Gbps Fibre Channel switching modules:

- Six ports with shared rate mode and 8-Gbps speed (4:1 oversubscription) (default)
- One port with dedicated rate mode and 8-Gbps speed plus five ports with shared rate mode and 8-Gbps speed (10:1 oversubscription)
- Two ports with dedicated rate mode and 4-Gbps speed plus four ports with shared rate mode and 4-Gbps speed (4:1 oversubscription)

***Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)***

- One port with dedicated rate mode and 4-Gbps speed plus three ports with dedicated rate mode and 2-Gbps speed plus two ports with shared rate mode and 4-Gbps speed (4:1 oversubscription)
- Six ports with dedicated rate mode and 2-Gbps speed

## 24-Port 8-Gbps Fibre Channel Module BB\_Credit Buffers

Table 4-2 lists the BB\_credit buffer allocation for the 24-port 8-Gbps Fibre Channel switching module.

**Table 4-2 24-Port 8-Gbps Switching Module BB\_Credit Buffer Allocation**

BB_Credit Buffer Allocation	BB_Credit Buffers Per Port		
	Dedicated Rate Mode 8-Gbps Speed		Shared Rate Mode 8-Gbps Speed
	ISL	Fx Port	Fx Port
Default BB_credit buffers	500	32	32
Maximum BB_credit buffers	500 <sup>1</sup>	500 <sup>1</sup>	32
<b>Total Number of BB_Credit Buffers per Module</b>			
Ports 1 through 12	6000		
Ports 13 through 24	6000		

1. When connected to Generation 1 modules, reduce the maximum BB\_credit allocation to 250.

The following guidelines apply to BB\_credit buffers on 24-port 8-Gbps Fibre Channel switching modules:

- BB\_credit buffers allocated for ports 1 through 12 and 13 through 24 can be a maximum of 6000 each so that the load is distributed.
- BB\_credit buffers for ISL connections can be configured from a minimum of 2 buffers to a maximum of 500 buffers for dedicated rate mode.
- BB\_credit buffers for Fx port mode connections can be configured. The minimum is 2 buffers and the maximum of 500 buffers for dedicated rate mode or 32 buffers for shared rate mode.
- Performance buffers are not supported on this module.

Each port group on the 24-port 8-Gbps Fibre Channel switching module consists of three ports. The ports in shared rate mode in a port group can have a maximum bandwidth oversubscription of 10:1 considering that each port group has 12.8-Gbps bandwidth.

The following example configurations are supported by the 24-port 8-Gbps Fibre Channel switching modules:

- Three ports with shared rate mode and 8-Gbps speed (2:1 oversubscription) (default)
- One port with dedicated rate mode and 8-Gbps speed plus two ports with shared rate mode and 8-Gbps speed (4:1 oversubscription)
- One port with dedicated rate mode and 8-Gbps speed plus one port with dedicated rate mode and 4-Gbps speed plus one port with shared rate mode and 8-Gbps speed (10:1 oversubscription)
- Two ports with dedicated rate mode and 4-Gbps speed plus one port with shared rate mode and 8-Gbps speed (2:1 oversubscription)

***Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)***

- Three ports with dedicated rate mode and 4-Gbps speed

## 4/44-Port 8-Gbps Host-Optimized Fibre Channel Module BB\_Credit Buffers

Table 4-3 lists the BB\_credit buffer allocation for the 4/44-port 8-Gbps Fibre Channel switching module.

**Table 4-3 4/44-Port 8-Gbps Switching Module BB\_Credit Buffer Allocation**

BB_Credit Buffer Allocation	BB_Credit Buffers Per Port		
	Dedicated Rate Mode 8-Gbps Speed		Shared Rate Mode 8-Gbps Speed
	ISL	Fx Port	Fx Port
Default BB_credit buffers	125	32	32
Maximum BB_credit buffers	250	250	32
Total number of BB_credit buffers per module	6000		

The following guidelines apply to BB\_credit buffers on 4/44-port 8-Gbps Fibre Channel switching modules:

- BB\_credit buffers for ISL connections can be configured from a minimum of 2 buffers to a maximum of 500 buffers for dedicated rate mode.
- BB\_credit buffers for Fx port mode connections can be configured. The minimum is 2 buffers and the maximum of 250 buffers for dedicated rate mode or 32 buffers for shared rate mode.
- Performance buffers are not supported on this module.

Each port group on the 24-port 8-Gbps Fibre Channel switching module consists of 12 ports. The ports in shared rate mode in a port group can have a maximum bandwidth oversubscription of 10:1 considering that each port group has 12.8-Gbps bandwidth.

The following example configurations are supported by the 4/44-port 8-Gbps Fibre Channel switching modules:

- Twelve ports with shared rate mode and 4-Gbps speed (5:1 oversubscription) (default)
- One port with dedicated rate mode and 8-Gbps speed plus eleven ports with shared rate mode and 4-Gbps speed (10:1 oversubscription)
- One port with dedicated rate mode and 4-Gbps speed plus three ports with dedicated rate mode and 3-Gbps speed plus eight ports with shared rate mode and 4-Gbps speed (2:1 oversubscription)
- Twelve ports with dedicated rate mode and 1-Gbps speed

**[Send documentation comments to mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

## 48-Port 4-Gbps Fibre Channel Module BB\_Credit Buffers

Table 4-4 lists the BB\_credit buffer allocation for 48-port 4-Gbps Fibre Channel switching modules.

**Table 4-4 48-Port 4-Gbps Switching Module BB\_Credit Buffer Allocation**

BB_Credit Buffer Allocation	BB_Credit Buffers Per Port		
	Dedicated Rate Mode 4-Gbps Speed		Shared Rate Mode 4-Gbps Speed
	ISL <sup>1</sup>	Fx Port	Fx Port
Default BB_credit buffers	125	16	16
Maximum BB_credit buffers	250	250	16
Total number of BB_credit buffers per module	6000		

1. ISL = E port or TE port.

The following considerations apply to BB\_credit buffers on 48-port 4-Gbps Fibre Channel switching modules:

- BB\_credit buffers for ISL connections can be configured from a minimum of 2 buffers to a maximum of 250 buffers for dedicated rate mode or 16 buffers for shared rate mode.
- BB\_credit buffers for Fx port mode connections can be configured. The minimum is 2 buffers and the maximum of 250 buffers for dedicated rate mode or 16 buffers for shared rate mode.
- Performance buffers are not supported on this module.


Each port group on the 48-port 4-Gbps Fibre Channel switching module consists of 12 ports. The ports in shared rate mode have bandwidth oversubscription of 2:1 by default. However, some configurations of the shared ports in a port group can have maximum bandwidth oversubscription of 4:1 (considering that each port group has 12.8-Gbps bandwidth).

The following example configurations are supported by the 48-port 4-Gbps Fibre Channel switching modules:

- Twelve ports with shared rate mode and 4-Gbps speed (4:1 oversubscription) (default)
- One port with dedicated rate mode and 4-Gbps speed plus  
11 ports with shared rate mode and 4-Gbps speed (5:1 oversubscription)
- One port with dedicated rate mode and 4-Gbps speed plus  
11 ports with shared rate mode and 2-Gbps speed (2.5:1 oversubscription)
- Two ports with dedicated rate mode and 2-Gbps speed plus  
10 ports with shared rate mode and 4-Gbps speed (5:1 oversubscription)
- Two ports with dedicated rate mode and 2-Gbps speed plus  
10 ports with shared rate mode and 2-Gbps speed (2.5:1 oversubscription)
- Twelve ports with dedicated rate mode and 1-Gbps speed
- Three ports with dedicated rate mode and 4-Gbps speed plus  
four ports with shared rate mode and 1-Gbps speed  
five ports put out-of-service (see [Figure 4-6](#))

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

**Figure 4-6 Example Speed and Rate Configuration on a 48-Port 4-Gbps Switching Module**

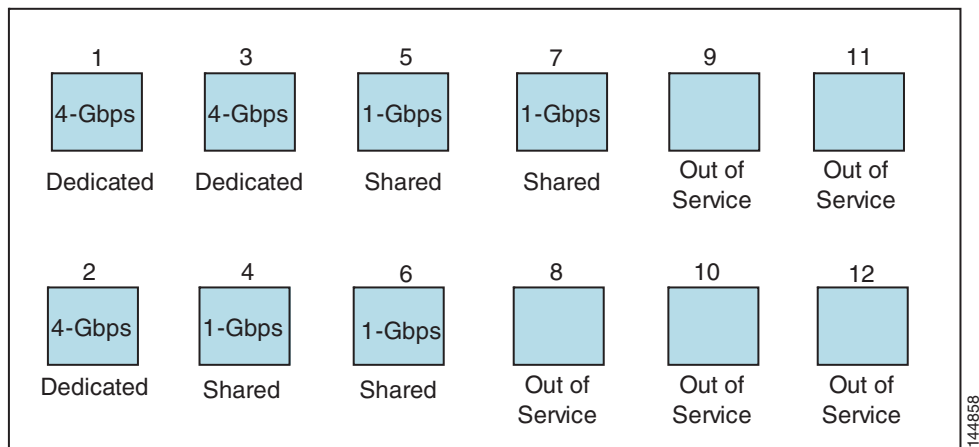


- Six ports with dedicated rate mode and 2-Gbps speed plus four ports with shared rate mode and 1-Gbps speed plus two ports put out-of-service (see [Figure 4-7](#))



**Note**

For detailed configuration steps of this example, see “[Configuring a 48-Port 4-Gbps Fibre Channel Switching Module Example](#)” section on page 3-39.

**Figure 4-7 Example Speed and Rate Configuration on a 48-Port 4-Gbps Switching Module**

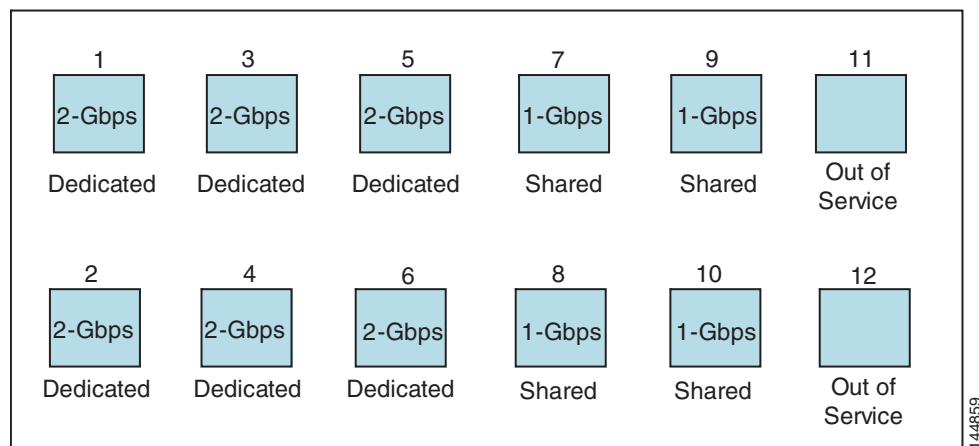

***Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)***

## 24-Port 4-Gbps Fibre Channel Module BB\_Credit Buffers

Table 4-5 lists the BB\_credit buffer allocation for 24-port 4-Gbps Fibre Channel switching modules.

**Table 4-5 24-Port 4-Gbps Switching Module BB\_Credit Buffer Allocation**

BB_Credit Buffer Allocation	BB_Credit Buffers Per Port		
	Dedicated Rate Mode 4-Gbps Speed		Shared Rate Mode 4-Gbps Speed
	ISL <sup>1</sup>	Fx Port	Fx Port
Default BB_credit buffers	250	16	16
Maximum BB_credit buffers	250	250	16
Total number of BB_credits buffers per module	6000		

1. ISL = E port or TE port.

The following considerations apply to BB\_credit buffers on 24-port 4-Gbps Fibre Channel switching modules:

- BB\_credit buffers for ISL connections can be configured from a minimum of 2 buffers to a maximum of 250 buffers for dedicated rate mode or 16 buffers for shared rate mode.
- BB\_credit buffers for Fx port mode connections can be configured. The minimum is 2 buffers and the maximum of 250 buffers for dedicated rate mode or 16 buffers for shared rate mode.
- Performance buffers are not supported on this module.

Each port group on the 24-port 4-Gbps Fibre Channel switching module consists of six ports. The ports in shared rate mode have a bandwidth oversubscription of 2:1 by default. However, some configurations of the shared ports in a port group can have a maximum bandwidth oversubscription of 4:1 (considering that each port group has 12.8-Gbps bandwidth).

The following example configurations are supported by the 24-port 4-Gbps Fibre Channel switching modules:

- Six ports with shared rate mode and 4-Gbps speed (2:1 oversubscription) (default)
- Two ports with dedicated rate mode and 4-Gbps speed plus four ports with shared rate mode and 4-Gbps speed (with 4:1 oversubscription)
- One port with dedicated rate mode and 4-Gbps speed plus three ports with dedicated rate mode and 2-Gbps speed plus two ports with shared rate mode and 4-Gbps speed (4:1 oversubscription)
- Six ports with dedicated rate mode and 2-Gbps speed
- Three ports with dedicated rate mode and 4-Gbps speed plus three ports with shared rate mode and 1-Gbps speed (see [Figure 4-8](#))




### Note

For detailed configuration steps of this example, see the “[Configuring a 24-Port 4-Gbps Fibre Channel Switching Module Example](#)” section on page 3-39.

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

**Figure 4-8 Example Speed and Rate Configuration on a 24-Port 4-Gbps Switching Module**

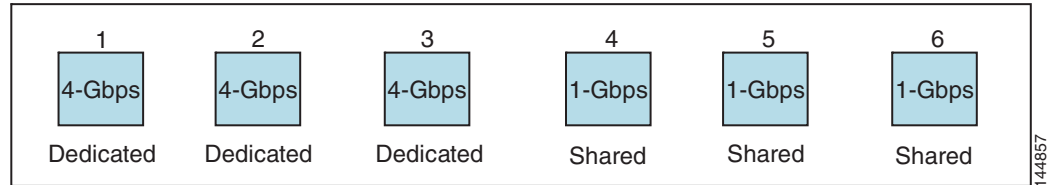

## 18-Port Fibre Channel/4-Port Gigabit Ethernet Multiservice Module BB\_Credit Buffers

Table 4-5 lists the BB\_credit buffer allocation for 18-port 4-Gbps multiservice modules.

**Table 4-6 18-Port 4-Gbps Multiservice Module BB\_Credit Buffer Allocation**

BB_Credit Buffer Allocation	BB_Credit Buffers Per Port			
	Dedicated Rate Mode 4-Gbps Speed		Shared Rate Mode 4-Gbps Speed	
	ISL <sup>1</sup>	Fx Port	ISL <sup>1</sup>	Fx Port
Default BB_credit buffers	250	16	16	16
Maximum BB_credit buffers	250	250	16	16
Total number of BB_credit buffers per module	4509			

1. ISL = E port or TE port.

The following considerations apply to BB\_credit buffers on 18-port 4-Gbps Fibre Channel switching modules:

- BB\_credit buffers for ISL connections can be configured from a minimum of 2 buffers to a maximum of 250 buffers for dedicated rate mode or 16 buffers for shared rate mode.
- BB\_credit buffers for Fx port mode connections can be configured. The minimum is 2 buffers and the maximum of 250 buffers for dedicated rate mode or 16 buffers for shared rate mode.
- Performance buffers are not supported on this module.

## 12-Port 4-Gbps Switching Module BB\_Credit Buffers

Table 4-7 lists the BB\_credit buffer allocation for 12-port 4-Gbps switching modules.

**Table 4-7 12-Port 4-Gbps Switching Module BB\_Credit Buffer Allocation**

BB_Credit Buffer Allocation Type	BB_Credit Buffers Per Port	
	Dedicated Rate Mode 4-Gbps Speed	
	ISL <sup>1</sup>	Fx Port
Default BB_credit buffers	250	16
Maximum BB_credit buffers	250	16
Default Performance buffers	145	12

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

**Table 4-7 12-Port 4-Gbps Switching Module BB\_Credit Buffer Allocation (continued)**

BB_Credit Buffer Allocation Type	BB_Credit Buffers Per Port	
	Dedicated Rate Mode 4-Gbps Speed	
	ISL <sup>1</sup>	Fx Port
Total number of BB_credit buffers per module	5488	
Total number of performance buffers per module	512 (shared)	

1. ISL = E port or TE port.

The following considerations apply to BB\_credit buffers on 12-port 4-Gbps switching modules:

- BB\_credit buffers for ISL connections can be configured from a minimum of 2 buffers to a maximum of 250 buffers.
- BB\_credit buffers for Fx port mode connections can be configured from a minimum of 2 buffers to a maximum of 250 buffers.
- By default, 512 performance buffers are preallocated and are shared by all the ports. These buffers are configurable and the buffers are assigned to the port based on the availability of the buffers in the shared pool.
- There are 2488 extra buffers available as extended BB\_credit buffers after allocating all the default BB\_credit buffers for all the ports in ISL mode (5488 - (250 \* 12)).



**Note** Extended BB\_credits are allocated across all ports on the switch; they are not allocated by port group.



**Note**

By default, the ports in the 12-port 4-Gbps switching modules come up in 4-Gbps dedicated rate mode but can be configured as 1-Gbps and 2-Gbps dedicated rate mode. Shared mode is not supported.

***Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)***

## 4-Port 10-Gbps Switching Module BB\_Credit Buffers

Table 4-8 lists the BB\_credit buffer allocation for 4-port 10-Gbps switching modules.

**Table 4-8 4-Port 10-Gbps Switching Module BB\_Credit Buffer Allocation**

BB_Credit Buffer Allocation Type	BB_Credit Buffers Per Port	
	Dedicated Rate Mode 10-Gbps Speed	
	ISL <sup>1</sup>	F port <sup>2</sup>
Default BB_credit buffers	250	16
Maximum BB_credit buffers	750	16
Maximum BB_credit buffers on one of the ports with Enterprise license	4095	
Total number of BB_credit buffers per module	5488	
Default Performance buffers	145	12
Total number of performance buffers per module	512 (shared)	

1. ISL = E port or TE port.
2. Ports on the 4-port 10-Gbps cannot operate in FL port mode.



### Note

The ports in the 4-port 10-Gbps switching module only support 10-Gbps dedicated rate mode. FL port mode and shared rate mode are not supported.

The following considerations apply to BB\_credit buffers on 4-port 10-Gbps switching modules:

- BB\_credit buffers for ISL connections can be configured from a minimum of 2 buffers to a maximum of 750 buffers.
- BB\_credit buffers for Fx port mode connections can be configured from a minimum of 2 buffers to a maximum of 750 buffers.
- By default, 512 performance buffers are preallocated and are shared by all the ports. These buffers are configurable and the buffers are assigned to the port based on the availability of the buffers in the shared pool.
- There are 2488 extra buffers available as extended BB\_credits after allocating all the default BB\_credit buffers for all the ports in ISL mode (5488 - (750 \* 4)).



### Note

Extended BB\_credits are allocated across all ports on the switch; they are not allocated by port group.



### Note

On Generation 2 module, one port will not come up for the following configuration for all ports:

- Port Mode: auto or E for all the ports
- Rate Mode: dedicated
- Buffer Credits: default value

***Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)***


**Note**

On Generation 3 module, one or two ports will not come up for the following configuration for first half of the ports, the second half of the ports or all ports:

- Port Mode: auto or E for the first half of the ports, the second half of the ports, or for all of the ports
- Rate Mode: dedicated
- Buffer Credits: default value

When you configure port mode to auto or E and rate mode to dedicated for all ports in the global buffer pool, you need to reconfigure buffer credits on one or more ports (other than default).

## BB\_Credit Buffers for Fabric Switches

This section describes how buffer credits are allocated to Cisco MDS 9000 Fabric switches, and includes the following topics:

- [Cisco MDS 9148 Fabric Switch BB\\_Credit Buffers, page 4-16](#)
- [Cisco MDS 9148 Fabric Switch BB\\_Credit Buffers, page 4-16](#)
- [Cisco MDS 9124 Fabric Switch BB\\_Credit Buffers, page 4-17](#)
- [Cisco MDS 9222i Multiservice Modular Switch BB\\_Credit Buffers, page 4-17](#)

### Cisco MDS 9148 Fabric Switch BB\_Credit Buffers

[Table 4-9](#) lists the BB\_credit buffer allocation for 48-port 8-Gbps Fibre Channel switches.

**Table 4-9 48-Port 8-Gbps Fabric Switch BB\_Credit Buffer Allocation**

BB_Credit Buffer Allocation Type	BB_Credit Buffers Per Port Group	BB_Credit Buffers Per Port	
		ISL <sup>1</sup>	Fx Port
Default BB_credit buffers	128	32	32
Maximum configurable BB_credit buffers on 8-Gbps mode	128	125	125

1. ISL = E port or TE port.

The following considerations apply to BB\_credit buffers on 48-port 8-Gbps Fabric Switches:

- BB\_credit buffers can be configured from a minimum of 1 buffer to a maximum of 125 buffers per port when the ports are in F or FL mode.
- BB\_credit buffers can be configured from a minimum of 2 buffers to a maximum of 125 buffers per port when the ports are in E or TE mode.

### Cisco MDS 9134 Fabric Switch BB\_Credit Buffers

[Table 4-10](#) lists the BB\_credit buffer allocation for 32-port 4-Gbps Fibre Channel switches.

***Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)***

**Table 4-10 32-Port 4-Gbps Fabric Switch BB\_Credit Buffer Allocation**

BB_Credit Buffer Allocation Type	BB_Credit Buffers Per Port Group	BB_Credit Buffers Per Port	
		ISL <sup>1</sup>	Fx Port
User-configurable BB_credit buffers	64	64	64
Default BB_credit buffers on 10-Gbps mode	64	64	64
Default BB_credit buffers on 4-Gbps mode	64	16	16

1. ISL = E port or TE port.

The following considerations apply to BB\_credit buffers on 32-port 4-Gbps switches:

- BB\_credit buffers can be configured from a minimum of 1 buffer to a maximum of 61 buffers per port when the ports are in F mode and in 4-Gbps speed mode.
- BB\_credit buffers can be configured from a minimum of 2 buffers to a maximum of 64 buffers per port when the ports are in auto or E mode and in 4-Gbps speed mode.
- BB\_credit buffers can be configured from a minimum of 64 buffers to a maximum of 64 buffers per port when a port is in 10-Gbps speed mode. There can be only one port per port group configured in 10-Gbps mode. The rest of the three ports must be in down state.
- BB\_credit buffers for Fx port mode connections can be configured from a minimum of 2 buffers to a maximum of 64 buffers.

## Cisco MDS 9124 Fabric Switch BB\_Credit Buffers

Table 4-11 lists the BB\_credit buffer allocation for 24-port 4-Gbps Fibre Channel switches.

**Table 4-11 24-Port 4-Gbps Fabric Switch BB\_Credit Buffer Allocation Defaults**

BB_Credit Buffer Allocation Type	BB_Credit Buffers Per Port Group	BB_Credit Buffers Per Port Defaults	
		ISL <sup>1</sup>	Fx Port
User-configurable BB_credit buffers	64	16	16

1. ISL = E port or TE port.

## Cisco MDS 9222i Multiservice Modular Switch BB\_Credit Buffers

Table 4-12 lists the BB\_credit buffer allocation for 18-port 4-Gbps Multiservice Modular switches.

**[Send documentation comments to mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

**Table 4-12 18-Port 4-Gbps Fabric Switch BB\_Credit Buffer Allocation Defaults**

BB_Credit Buffer Allocation Type	BB_Credit Buffers Per Port Group	BB_Credit Buffers Per Port Defaults	
		ISL <sup>1</sup>	Fx Port
User-configurable BB_credit buffers	4509	250	16

1. ISL = E port or TE port.

## About Extended BB\_Credits

To facilitate BB\_credits for long-haul links, the extended BB\_credits feature allows you to configure the receive buffers above the maximum value on all Generation 2 and Generation 3 switching modules. When necessary, you can reduce the buffers on one port and assign them to another port, exceeding the default maximum. The minimum extended BB\_credits per port is 256 and the maximum is 4095.



### Note

Extended BB\_credits are not supported on the Cisco MDS 9148 Fabric Switch, Cisco MDS 9134 Fabric Switch, Cisco MDS 9124 Fabric Switch, the Cisco Fabric Switch for HP c-Class BladeSystem, and the Cisco Fabric Switch for IBM BladeCenter.

In general, you can configure any port in a port group to dedicated rate mode. To do this, you must first release the buffers from the other ports before configuring larger extended BB\_credits for a port.



### Note

The ENTERPRISE\_PKG license is required to use extended BB\_credits on Generation 2 and Generation 3 switching modules. Also, extended BB\_credits are not supported by ports in shared rate mode.

All ports on the Generation 2 and Generation 3 switching modules support extended BB\_credits. There are no limitations for how many extended BB\_credits you can assign to a port (except for the maximum and minimum limits). If necessary, you can take interfaces out of service to make more extended BB\_credits available to other ports.

You can use the extended BB\_credits flow control mechanism in addition to BB\_credits for long-haul links.

This section includes the following topics:

- [Extended BB\\_credits on Generation 1 Switching Modules, page 4-18](#)
- [Extended BB\\_credits on Generation 2 and Generation 3 Switching Modules, page 4-19](#)

## Extended BB\_credits on Generation 1 Switching Modules

The BB\_credits feature allows you to configure up to 255 receive buffers on Generation 1 switching modules. To facilitate BB\_credits for long haul links, you can configure up to 3,500 receive BB\_credits on a Fibre Channel port on a Generation 1 switching module.


To use this feature on Generation 1 switching modules, you must meet the following requirements:

- Obtain the ENTERPRISE\_PKG license. See the *Cisco MDS 9000 Family NX-OS Licensing Guide*.

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

- Configure this feature in any port of the full-rate 4-port group in either the Cisco MDS 9216i Switch or in the MPS-14/2 module (see [Figure 4-9](#)).

**Figure 4-9 Port Group Support for the Extended BB\_Credits Feature**

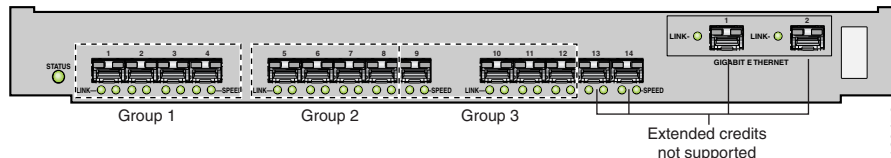

The port groups that support extended credit configurations are as follows:

- Any one port in ports 1 to 4 (identified as Group 1).
- Any one port in ports 5 to 8 (identified as Group 2).
- Any one port in ports 9 to 12 (identified as Group 3).



**Note** The last two Fibre Channel ports (port 13 and port 14) and the two Gigabit Ethernet ports do not support the extended BB\_credits feature.

- Explicitly enable this feature in the required Cisco MDS switch.
- Disable the remaining three ports in the 4-port group if you need to assign more than 2,400 BB\_credits to the first port in the port group.
  - If you assign less than 2,400 extended BB\_credits to any one port in a port group, the remaining three ports in that port group can retain up to 255 BB\_credits based on the port mode.



**Note** The receive BB\_credit value for the remaining three ports depends on the port mode. The default value is 16 for the Fx mode and 255 for E or TE modes. The maximum value is 255 in all modes. This value can be changed as required without exceeding the maximum value of 255 BB\_credits.

- If you assign more than 2,400 (up to a maximum of 3,500) extended BB\_credits to the port in a port group, you must disable the other three ports.
- Be aware that changing the BB\_credit value results in the port being disabled and then reenabled.
- Disable (explicitly) this feature if you need to nondisruptively downgrade to Cisco SAN-OS Release 1.3 or earlier. When you disable this feature, the existing extended BB\_credit configuration is completely erased.



**Note** The extended BB\_credit configuration takes precedence over the receive BB\_credit and performance buffer configurations.

## Extended BB\_credits on Generation 2 and Generation 3 Switching Modules

To use this feature on Generation 2 or Generation 3 switching modules, you must meet the following requirements:

- Display the interface configuration in the Information pane.

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

- Obtain the Enterprise package (ENTERPRISE\_PKG) license (see the *NX-OS Family Licensing Guide*).
- Configure this feature in any port on a Generation 2 switch module. See the “[About Extended BB\\_Credits](#)” section on page 4-18 for more information on extended BB\_credits on Generation 2 switching modules.


**Note**

Extended BB\_credits are not supported on the Cisco MDS 9124 Fabric Switch, Cisco MDS 9134 Fabric Switch, the Cisco Fabric Switch for HP c-Class BladeSystem, and the Cisco Fabric Switch for IBM BladeCenter.

## Configuring Extended BB\_credits

To configure extended BB\_credits for a MDS-14/2 interface, for a Generation 2 switching module interface (not including the Cisco MDS 9124 Fabric Switch), or for an interface in a Cisco MDS 9216i switch, follow these steps:

	Command	Purpose
Step 1	switch# <b>config t</b> switch(config)#	Enters configuration mode.
Step 2	switch(config)# <b>fcrxbbcredit extended enable</b>	Enables the extended BB_credits feature.
	switch(config)# <b>no fcrxbbcredit extended enable</b>	Disables (default) the extended BB_credits feature.
Step 3	switch(config)# <b>interface fc1/1</b> switch(config-if)#	Selects a Fibre Channel interface and enters interface configuration submode.
Step 4	switch(config-if)# <b>switchport fcrxbbcredit extended 1500</b>	Applies the extended BB_credit value of 1,500 credits to the selected interface. The valid range is from 256 to 3,500 credits.
	switch(config-if)# <b>no switchport fcrxbbcredit extended 1500</b>	Clears the configured extended BB_credit configuration for this port.
Step 5	switch# <b>do show interface fc3/2</b> fc3/2 is trunking Hardware is Fibre Channel, SFP is short wave laser w/o OFC (SN) Port WWN is 20:82:00:05:30:00:2a:1e Peer port WWN is 20:42:00:0b:46:79:f1:80 Admin port mode is auto, trunk mode is on Port mode is TE Port vsan is 1 Speed is 2 Gbps Transmit B2B Credit is 255 Receive B2B Credit is 1500 Receive data field Size is 2112 ...	Displays the receive and transmit BB_credit values along with other pertinent interface information for this interface if the interface is in the up state.  <b>Note</b> The receive BB_credit value reflects the extended BB_credit configuration, if applicable.

***Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)***

## Enabling Buffer-to-Buffer Credit Recovery

Although the Fibre Channel standards require low bit error rates, bit errors do occur. Over time, the corruption of receiver-ready messages, known as R\_RDY primitives, can lead to a loss of credits, which can eventually cause a link to stop transmitting in one direction. The Fibre Channel standards provide a feature for two attached ports to detect and correct this situation. This feature is called buffer-to-buffer credit recovery.

Buffer-to-buffer credit recovery functions as follows: the sender and the receiver agree to send checkpoint primitives to each other, starting from the time that the link comes up. The sender sends a checkpoint every time it has sent the specified number of frames, and the receiver sends a checkpoint every time it has sent the specified number of R\_RDY primitives. If the receiver detects lost credits, it can retransmit them and restore the credit count on the sender.

The buffer-to-buffer credit recovery feature can be used on any nonarbitrated loop link. This feature is most useful on unreliable links, such as MANs or WANs, but can also help on shorter, high-loss links, such as a link with a faulty fiber connection.



### Note

The buffer-to-buffer credit recovery feature is not compatible with distance extension (DE) feature, also known as buffer-to-buffer credit spoofing. If you use intermediate optical equipment, such as DWDM transceivers or Fibre Channel bridges, on ISLs between switches that use DE, then buffer-to-buffer credit recovery on both sides of the ISL needs to be disabled.

Buffer-to-buffer credit recovery on ISLs (E or TE ports) is enabled by default.

To use buffer-to-buffer credit recovery on a port, follow these steps:

	Command	Purpose
Step 1	switch# <b>config t</b> switch(config)#	Enters configuration mode.
Step 2	switch(config)# <b>interface fc 1/1</b> switch(config-if)#	Selects the interface and enters interface configuration submode.
Step 3	switch(config-if)# <b>switchport fcbbscn</b>	Enables buffer-to-buffer credit recovery on the interface.
	switch(config-if)# <b>no switchport fcbbscn</b>	Disables (default) buffer-to-buffer credit recovery on the interface.

## Enabling Buffer-to-Buffer State Change Number

The BB\_SC\_N field (word 1, bits 15-12) specifies the buffer-to-buffer state change (BB\_SC) number. The BB\_SC\_N field indicates that the sender of the port login (PLOGI), fabric login (FLOGI), or ISLs (E or TE ports) frame is requesting  $2^{\text{BB\_SC\_N}}$  number of frames to be sent between two consecutive BB\_SC send primitives, and twice the number of R\_RDY primitives to be sent between two consecutive BB\_SC receive primitives.

For Generation 2 and Generation 3 modules, the BB\_SCN on ISLs (E or TE ports) is enabled by default. This can fail the ISLs if used with optical equipment using distance extension (DE), also known as buffer-to-buffer credit spoofing.

To use the BB\_SC\_N field during PLOGI or FLOGI, follow these steps:

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**



#### Note

If you use distance extension (buffer-to-buffer credit spoofing) on ISLs between switches, the BB\_SCN parameter on both sides of the ISL needs to be disabled.

To use the BB\_SC\_N field during PLOGI or FLOGI, follow these steps:

	Command	Purpose
Step 1	switch# <b>config t</b> switch(config)#	Enters configuration mode.
Step 2	switch(config)# <b>interface fc 1/1</b> switch(config-if)#	Selects the interface and enters interface configuration submenu.
Step 3	switch(config-if)# <b>switchport fcbbfcn</b>	Enables the use of buffer-to-buffer state change number for PLOGIs and FLOGIs on the interface.
	switch(config-if)# <b>no switchport fcbbfcn</b>	Disables (default) the use of buffer-to-buffer state change number for PLOGIs and FLOGIs on the interface.

## About Receive Data Field Size

You can also configure the receive data field size for Fibre Channel interfaces. If the default data field size is 2112 bytes, the frame length will be 2148 bytes.

## Configuring Receive Data Field Size

You can also configure the receive data field size for Fibre Channel interfaces. If the default data field size is 2112 bytes, the frame length will be 2148 bytes.

To configure the receive data field size, follow these steps:

	Command	Purpose
Step 1	switch# <b>config t</b>	Enters configuration mode.
Step 2	switch(config)# <b>interface fc1/1</b> switch(config-if)#	Selects a Fibre Channel interface and enters interface configuration submenu.
Step 3	switch(config-if)# <b>switchport fcrxbufsize 2000</b>	Reduces the data field size for the selected interface to 2000 bytes. The default is 2112 bytes and the range is from 256 to 2112 bytes.

## Displaying BB\_Credit Information

To display the BB\_credit information, use the **show interface bbcredit** command (see [Example 4-1](#) and [Example 4-2](#)).

#### Example 4-1 Displays BB\_credit Information

```
switch# show interface bbcredit
fc2/1 is down (SFP not present)
...
```

***Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)***

```
fc2/17 is trunking
  Transmit B2B Credit is 255
  Receive B2B Credit is 12
  Receive B2B Credit performance buffers is 375
    12 receive B2B credit remaining
    255 transmit B2B credit remaining
fc2/18 is down (SFP not present)
fc2/19 is down (SFP not present)
fc2/20 is down (SFP not present)
fc2/21 is down (Link failure or not-connected)
...
fc2/31 is up
  Transmit B2B Credit is 0
  Receive B2B Credit is 12
  Receive B2B Credit performance buffers is 48
    12 receive B2B credit remaining
    0 transmit B2B credit remaining
fc2/32 is down (Link failure or not-connected)
```

***Example 4-2 Displays BB\_credit Information for a Specified Fibre Channel Interface***

```
switch# show interface fc2/31 bbcredit
fc2/31 is up
  Transmit B2B Credit is 0
  Receive B2B Credit is 12
  Receive B2B Credit performance buffers is 48
    12 receive B2B credit remaining
    0 transmit B2B credit remaining
```

***Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)***