



CHAPTER 5

Configuring and Managing Zones

Zoning enables you to set up access control between storage devices or user groups. If you have administrator privileges in your fabric, you can create zones to increase network security and to prevent data loss or corruption. Zoning is enforced by examining the source-destination ID field.

Advanced zoning capabilities specified in the FC-GS-4 and FC-SW-3 standards are provided. You can use either the existing basic zoning capabilities or the advanced, standards-compliant zoning capabilities.

This chapter includes the following topics:

- [Information About Zoning, page 5-1](#)
- [Licensing Requirements for Zoning, page 5-12](#)
- [Guidelines and Limitations, page 5-13](#)
- [Default Settings, page 5-15](#)
- [Configuring Zones, page 5-15](#)
- [Configuring Zone Sets, page 5-20](#)
- [Verifying Zone Configuration, page 5-37](#)
- [Configuration Examples for Zoning, page 5-37](#)
- [Field Descriptions for Zones, page 5-38](#)
- [Additional References, page 5-43](#)

Information About Zoning

Zoning has the following features:

- A zone consists of multiple zone members.
 - Members in a zone can access each other; members in different zones cannot access each other.
 - If zoning is not activated, all devices are members of the default zone.
 - If zoning is activated, any device that is not in an active zone (a zone that is part of an active zone set) is a member of the default zone.
 - Zones can vary in size.
 - Devices can belong to more than one zone.
 - A physical fabric can have a maximum of 16,000 members. This includes all VSANs in the fabric.

Send documentation comments to dcnm-san-docfeedback@cisco.com

- A zone set consists of one or more zones.
 - A zone set can be activated or deactivated as a single entity across all switches in the fabric.
 - Only one zone set can be activated at any time.
 - A zone can be a member of more than one zone set.
 - A zone switch can have a maximum of 500 zone sets.
- Zoning can be administered from any switch in the fabric.
 - When you activate a zone (from any switch), all switches in the fabric receive the active zone set. Additionally, full zone sets are distributed to all switches in the fabric, if this feature is enabled in the source switch.
 - If a new switch is added to an existing fabric, zone sets are acquired by the new switch.
- Zone changes can be configured nondisruptively. New zones and zone sets can be activated without interrupting traffic on unaffected ports or devices.
- Zone membership criteria is based mainly on WWNs or FC IDs.
 - Port world wide name (pWWN)—Specifies the pWWN of an N port attached to the switch as a member of the zone.
 - Fabric pWWN—Specifies the WWN of the fabric port (switch port's WWN). This membership is also referred to as port-based zoning.
 - FC ID—Specifies the FC ID of an N port attached to the switch as a member of the zone.
 - Interface and switch WWN (sWWN)—Specifies the interface of a switch identified by the sWWN. This membership is also referred to as interface-based zoning.
 - Interface and domain ID—Specifies the interface of a switch identified by the domain ID.
 - Domain ID and port number—Specifies the domain ID of an MDS domain and additionally specifies a port belonging to a non-Cisco switch.
 - IPv4 address—Specifies the IPv4 address (and optionally the subnet mask) of an attached device.
 - IPv6 address—The IPv6 address of an attached device in 128 bits in colon(:)-separated hexadecimal format.
- Default zone membership includes all ports or WWNs that do not have a specific membership association. Access between default zone members is controlled by the default zone policy.
- You can configure up to 8000 zones per VSAN and a maximum of 8000 zones for all VSANs on the switch.

This section includes the following topics:

- [Zone Implementation, page 5-3](#)
- [About the Edit Local Full Zone Database Tool, page 5-4](#)
- [About Zone Sets, page 5-5](#)
- [About Zone Set Creation, page 5-5](#)
- [About the Default Zone, page 5-6](#)
- [About FC Alias Creation, page 5-6](#)
- [Zone Enforcement, page 5-7](#)
- [Zone Set Distribution, page 5-7](#)
- [About Recovering from Link Isolation, page 5-8](#)

Send documentation comments to dcnm-san-docfeedback@cisco.com

- [Zone Set Duplication, page 5-8](#)
- [About Backing Up and Restoring Zones, page 5-9](#)
- [About Zone-Based Traffic Priority, page 5-9](#)
- [About Broadcast Zoning, page 5-9](#)
- [About LUN Zoning, page 5-10](#)
- [About Read-Only Zones, page 5-11](#)
- [About Enhanced Zoning, page 5-11](#)
- [Merging the Database, page 5-11](#)

Zone Implementation

All switches in the Cisco MDS 9000 Family automatically support the following basic zone features (no additional configuration is required):

- Zones are contained in a VSAN.
- Hard zoning cannot be disabled.
- Name server queries are soft-zoned.
- Only active zone sets are distributed.
- Unzoned devices cannot access each other.
- A zone or zone set with the same name can exist in each VSAN.
- Each VSAN has a full database and an active database.
- Active zone sets cannot be changed, without activating a full zone database.
- Active zone sets are preserved across switch reboots.
- Changes to the full database must be explicitly saved.
- Zone reactivation (a zone set is active and you activate another zone set) does not disrupt existing traffic.

If required, you can additionally configure the following zone features:

- Propagate full zone sets to all switches on a per VSAN basis.
- Change the default policy for unzoned members.
- Interoperate with other vendors by configuring a VSAN in the interop mode. You can also configure one VSAN in the interop mode and another VSAN in the basic mode in the same switch without disrupting each other.
- Bring E ports out of isolation.

Send documentation comments to dcnm-san-docfeedback@cisco.com


About the Edit Local Full Zone Database Tool

You can use the Edit Full Zone Database Tool to complete the following tasks:

- You can display information by VSAN by using the pull-down menu without having to get out of the screen, selecting a VSAN, and re-entering.
- You can use the **Add to zone or alias** button to move devices up or down by alias or by zone.
- You can add zoning characteristics based on alias in different folders.
- You can triple-click to rename zone sets, zones, or aliases in the tree.

The Edit Local Full Zone Database tool allows you to zone across multiple switches and all zoning features are available through the Edit Local Full Zone Database dialog box (see [Figure 5-1](#)).

Figure 5-1 Edit Local Full Zone Database Dialog Box

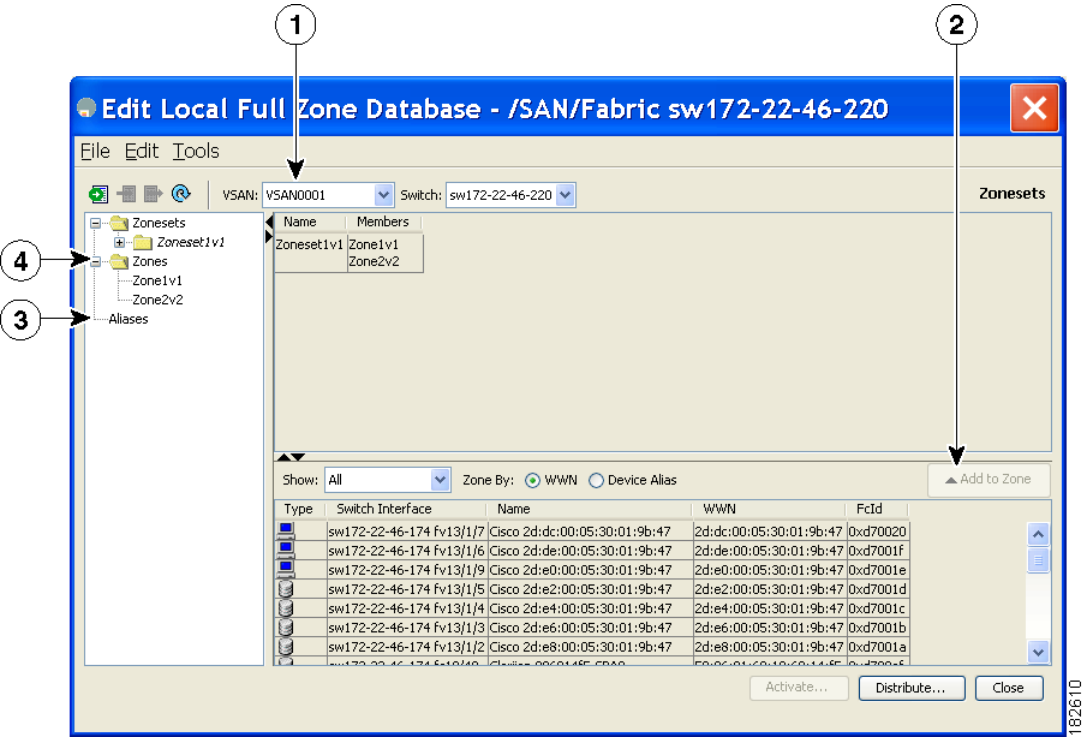

1	You can display information by VSAN by using the drop-down menu without closing the dialog box, selecting a VSAN, and re-entering.	3	You can add zoning characteristics based on alias in different folders.
2	You can use the Add to zone button to move devices up or down by alias or by zone.	4	You can triple-click to rename zone sets, zones, or aliases in the tree.


Note

The Device Alias radio button is visible only if device alias is in enhanced mode. For more information, see [“Creating Device Aliases” section on page 6-7](#).

[Send documentation comments to dcnm-san-docfeedback@cisco.com](mailto:dcnm-san-docfeedback@cisco.com)

About Zone Sets

Zones provide a method for specifying access control. Zone sets are a grouping of zones to enforce access control in the fabric.

Zone sets are configured with the names of the member zones and the VSAN (if the zone set is in a configured VSAN).

Zone Set Distribution—You can distribute full zone sets using one of two methods: one-time distribution or full zone set distribution.

Zone Set Duplication—You can make a copy of a zone set and then edit it without altering the original zone set. You can copy an active zone set from the bootflash: directory, volatile: directory, or slot0, to one of the following areas:


- To the full zone set
- To a remote location (using FTP, SCP, SFTP, or TFTP)

The active zone set is not part of the full zone set. You cannot make changes to an existing zone set and activate it, if the full zone set is lost or is not propagated.

About Zone Set Creation

In [Figure 5-2](#), two separate sets are created, each with its own membership hierarchy and zone members.

Figure 5-2 Hierarchy of Zone Sets, Zones, and Zone Members

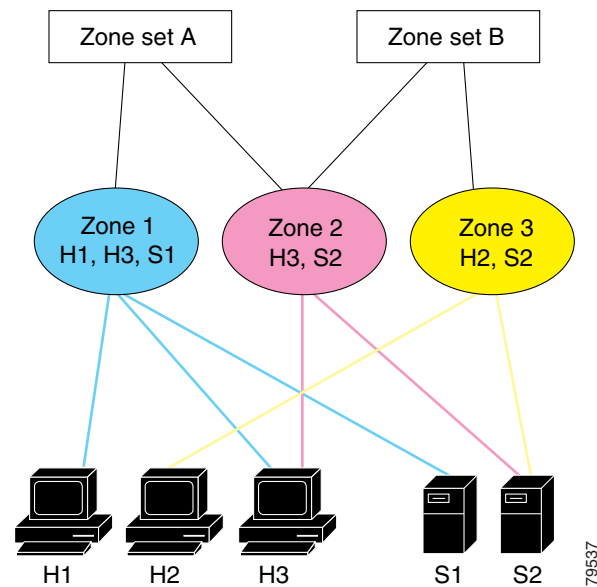

Either zone set A or zone set B can be activated (but not together).



Tip

Zone sets are configured with the names of the member zones and the VSAN (if the zone set is in a configured VSAN).

Send documentation comments to dcnm-san-docfeedback@cisco.com

About the Default Zone

Each member of a fabric (in effect a device attached to an Nx port) can belong to any zone. If a member is not part of any active zone, it is considered to be part of the default zone. Therefore, if no zone set is active in the fabric, all devices are considered to be in the default zone. Even though a member can belong to multiple zones, a member that is part of the default zone cannot be part of any other zone. The switch determines whether a port is a member of the default zone when the attached port comes up.



Note

Unlike configured zones, default zone information is not distributed to the other switches in the fabric.

Traffic can either be permitted or denied among members of the default zone. This information is not distributed to all switches; it must be configured in each switch.



Note

When the switch is initialized for the first time, no zones are configured and all members are considered to be part of the default zone. Members are not permitted to talk to each other.

Configure the default zone policy on each switch in the fabric. If you change the default zone policy on one switch in a fabric, be sure to change it on all the other switches in the fabric.



Note

The default settings for default zone configurations can be changed.

The default zone members are explicitly listed when the default policy is configured as permit or when a zone set is active. When the default policy is configured as deny, the members of this zone are not explicitly enumerated when you view the active zone set.



Note

The current default zoning policy in both the switches is deny. In the Cisco MDS 9222i Switch, the active zone set is `coco_isola_zoneset`. In the Cisco MDS 9513 Switch, there is no active zone set. However, because the default zoning policy is deny, the hidden active zone set is `d__default__cfg` which causes zone merge to fail. The behavior is same between two Brocade switches.

You can change the default zone policy for any VSAN by choosing **VSANxx > Default Zone** from the DCNM-SAN menu tree and clicking the **Policies** tab. It is recommended that you establish connectivity among devices by assigning them to a nondefault zone.

About FC Alias Creation

You can assign an alias name and configure an alias member using the following values:

- pWWN—The WWN of the N or NL port is in hex format (for example, 10:00:00:23:45:67:89:ab).
- fWWN—The WWN of the fabric port name is in hex format (for example, 10:00:00:23:45:67:89:ab).
- FC ID—The N port ID is in 0xhhhhhh format (for example, 0xce00d1).
- Domain ID—The domain ID is an integer from 1 to 239. A mandatory port number of a non-Cisco switch is required to complete this membership configuration.

Send documentation comments to dcnm-san-docfeedback@cisco.com

- IPv4 address—The IPv4 address of an attached device is in 32 bits in dotted decimal format along with an optional subnet mask. If a mask is specified, any device within the subnet becomes a member of the specified zone.
- IPv6 address—The IPv6 address of an attached device is in 128 bits in colon- (:) separated) hexadecimal format.
- Interface—Interface-based zoning is similar to port-based zoning because the switch interface is used to configure the zone. You can specify a switch interface as a zone member for both local and remote switches. To specify a remote switch, enter the remote switch WWN (sWWN) or the domain ID in the particular VSAN.



Tip

The Cisco NX-OS software supports a maximum of 2048 aliases per VSAN.

Zone Enforcement

Zoning can be enforced in two ways: soft and hard. Each end device (N port or NL port) discovers other devices in the fabric by querying the name server. When a device logs in to the name server, the name server returns the list of other devices that can be accessed by the querying device. If an Nx port does not know about the FC IDs of other devices outside its zone, it cannot access those devices.

In soft zoning, zoning restrictions are applied only during interaction between the name server and the end device. If an end device somehow knows the FC ID of a device outside its zone, it can access that device.

Hard zoning is enforced by the hardware on each frame sent by an Nx port. As frames enter the switch, source-destination IDs are compared with permitted combinations to allow the frame at wirespeed. Hard zoning is applied to all forms of zoning.



Note

Hard zoning enforces zoning restrictions on every frame, and prevents unauthorized access.

Switches in the Cisco MDS 9000 Family support both hard and soft zoning.

Zone Set Distribution

You can distribute full zone sets using one of two methods: one-time distribution or full zone set distribution.

Table 5-1 lists the differences between these distribution methods.

Table 5-1 Zone Set Distribution Differences

One-Time Distribution	Full Zone Set Distribution
Distributes the full zone set immediately.	Does not distribute the full zone set immediately.
Does not distribute the full zone set information along with the active zone set during activation, deactivation, or merge process.	Remembers to distribute the full zone set information along with the active zone set during activation, deactivation, and merge processes.


Send documentation comments to dcnm-san-docfeedback@cisco.com

About Recovering from Link Isolation

When two switches in a fabric are merged using a TE or E port, these TE and E ports may become isolated when the active zone set databases are different between the two switches or fabrics. When a TE port or an E port become isolated, you can recover that port from its isolated state using one of three options:

- Import the neighboring switch's active zone set database and replace the current active zone set (see [Figure 5-3](#)).
- Export the current database to the neighboring switch.
- Manually resolve the conflict by editing the full zone set, activating the corrected zone set, and then bringing up the link.

Figure 5-3 *Importing and Exporting the Database*

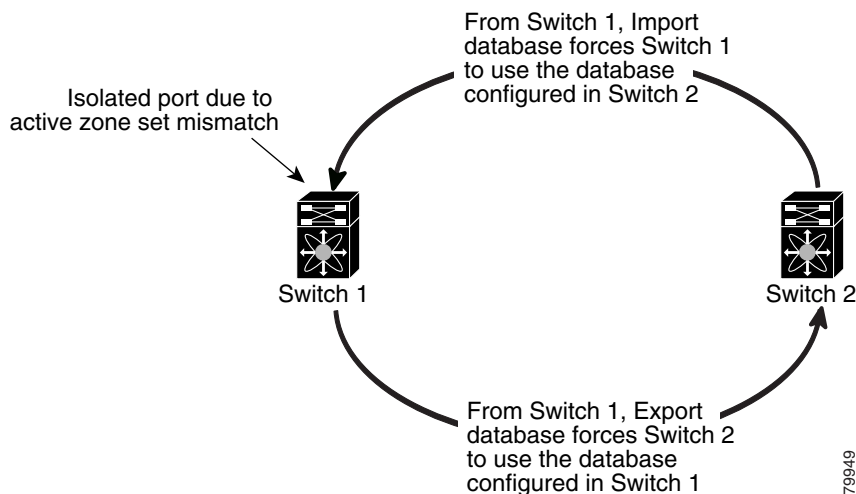

Zone Set Duplication

You can make a copy and then edit it without altering the existing active zone set. You can copy an active zone set from the bootflash: directory, volatile: directory, or slot0, to one of the following areas:

- To the full zone set
- To a remote location (using FTP, SCP, SFTP, or TFTP)

The active zone set is not part of the full zone set. You cannot make changes to an existing zone set and activate it, if the full zone set is lost or is not propagated.



Caution

Copying an active zone set to a full zone set may overwrite a zone with the same name, if it already exists in the full zone set database.

[Send documentation comments to dcnm-san-docfeedback@cisco.com](mailto:dcnm-san-docfeedback@cisco.com)

About Backing Up and Restoring Zones

You can back up the zone configuration to a workstation using TFTP. This zone backup file can then be used to restore the zone configuration on a switch. Restoring the zone configuration overwrites any existing zone configuration on a switch.

About Zone-Based Traffic Priority

The zoning feature provides an additional segregation method to prioritize select zones in a fabric and set up access control between devices. Using this feature, you can configure the quality of service (QoS) priority as a zone attribute. You can assign the QoS traffic priority attribute to be high, medium, or low. By default, zones with no specified priority are implicitly assigned a low priority. Refer to the *Cisco MDS 9000 NX-OS Family Quality of Service Configuration Guide* for more information.

To use this feature, you need to obtain the ENTERPRISE_PKG license (refer to the *Cisco NX-OS Family Licensing Guide*) and you must enable QoS in the switch (refer to the *Cisco MDS 9000 Family NX-OS Quality of Service Configuration Guide*).

This feature allows SAN administrators to configure QoS using a familiar data flow identification paradigm. You can configure this attribute on a zone-wide basis rather than between zone members.



Caution

If zone-based QoS is implemented in a switch, you cannot configure the interop mode in that VSAN.

About Broadcast Zoning



Note

Broadcast zoning is not supported on the Cisco Fabric Switch for HP c-Class BladeSystem and the Cisco Fabric Switch for IBM BladeCenter.

You can configure broadcast frames in the basic zoning mode. By default, broadcast zoning is disabled and broadcast frames are sent to all Nx ports in the VSAN. When enabled, broadcast frames are only sent to Nx ports in the same zone, or zones, as the sender. Enable broadcast zoning when a host or storage device uses this feature.

[Table 5-2](#) identifies the rules for the delivery of broadcast frames.

Table 5-2 Broadcasting Requirements

Active Zoning?	Broadcast Enabled?	Frames Broadcast?	Comments
Yes	Yes	Yes	Broadcast to all Nx ports that share a broadcast zone with the source of broadcast frames.
No	Yes	Yes	Broadcast to all Nx ports.
Yes	No	No	Broadcasting is disabled.

Send documentation comments to dcnm-san-docfeedback@cisco.com

**Tip**

If any NL port attached to an FL port shares a broadcast zone with the source of the broadcast frame, then the frames are broadcast to all devices in the loop.

**Caution**

If broadcast zoning is enabled on a switch, you cannot configure the interop mode in that VSAN.

About LUN Zoning

Logical unit number (LUN) zoning is a feature specific to switches in the Cisco MDS 9000 Family.

**Caution**

LUN zoning can only be implemented in Cisco MDS 9000 Family switches. If LUN zoning is implemented in a switch, you cannot configure the interop mode in that switch.

A storage device can have multiple LUNs behind it. If the device port is part of a zone, a member of the zone can access any LUN in the device. With LUN zoning, you can restrict access to specific LUNs associated with a device.

**Note**

When LUN 0 is not included within a zone, control traffic to LUN 0 (for example, REPORT_LUNS, INQUIRY) is supported, but data traffic to LUN 0 (for example, READ, WRITE) is denied.


- Host H1 can access LUN 2 in S1 and LUN 0 in S2. It cannot access any other LUNs in S1 or S2.
- Host H2 can access LUNs 1 and 3 in S1 and only LUN 1 in S2. It cannot access any other LUNs in S1 or S2.

**Note**

Unzoned LUNs automatically become members of the default zone.

Figure 5-4 shows a LUN-based zone example.

Figure 5-4 LUN Zoning Access

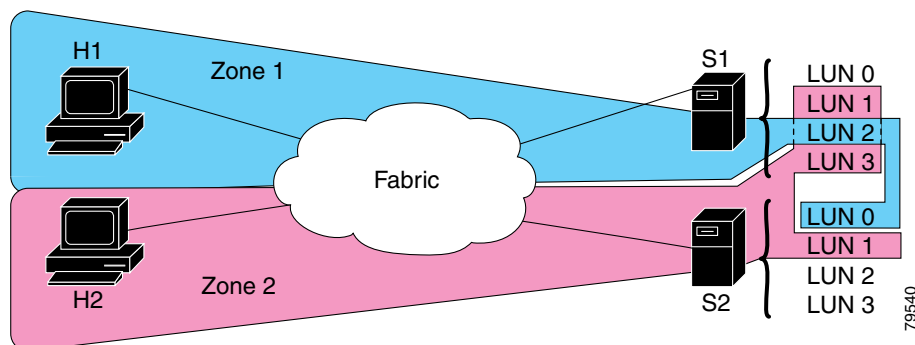

[Send documentation comments to dcnm-san-docfeedback@cisco.com](mailto:dcnm-san-docfeedback@cisco.com)

About Read-Only Zones

By default, an initiator has both read and write access to the target's media when they are members of the same Fibre Channel zone. The read-only zone feature allows members to have only read access to the media within a read-only Fibre Channel zone.

You can also configure LUN zones as read-only zones. Any zone can be identified as a read-only zone. By default all zones have read-write permission unless explicitly configured as a read-only zone.

About Enhanced Zoning

[Table 5-3](#) lists the advantages of the enhanced zoning feature in all switches in the Cisco MDS 9000 Family.

Table 5-3 Advantages of Enhanced Zoning

Basic Zoning	Enhanced Zoning	Enhanced Zoning Advantages
Administrators can make simultaneous configuration changes. Upon activation, one administrator can overwrite another administrator's changes.	Performs all configurations within a single configuration session. When you begin a session, the switch locks the entire fabric to implement the change.	One configuration session for the entire fabric to ensure consistency within the fabric.
If a zone is part of multiple zone sets, you create an instance of this zone in each zone set.	References to the zone are used by the zone sets as required once you define the zone.	Reduced payload size as the zone is referenced. The size is more pronounced with bigger databases.
The default zone policy is defined per switch. To ensure smooth fabric operation, all switches in the fabric must have the same default zone setting.	Enforces and exchanges the default zone setting throughout the fabric.	Fabric-wide policy enforcement reduces troubleshooting time.
To retrieve the results of the activation on a per switch basis, the managing switch provides a combined status about the activation. It does not identify the failure switch.	Retrieves the activation results and the nature of the problem from each remote switch.	Enhanced error reporting eases the troubleshooting process.
To distribute the zoning database, you must reactivate the same zone set. The reactivation may affect hardware changes for hard zoning on the local switch and on remote switches.	Implements changes to the zoning database and distributes it without reactivation.	Distribution of zone sets without activation avoids hardware changes for hard zoning in the switches.
The MDS-specific zone member types (IPv4 address, IPv6 address, symbolic node name, and other types) may be used by other non-Cisco switches. During a merge, the MDS-specific types can be misunderstood by the non-Cisco switches.	Provides a vendor ID along with a vendor-specific type value to uniquely identify a member type.	Unique vendor type.
The fWWN-based zone membership is only supported in Cisco interop mode.	Supports fWWN-based membership in the standard interop mode (interop mode 1).	The fWWN-based member type is standardized.

Merging the Database

The merge behavior depends on the fabric-wide merge control setting:

Send documentation comments to dcnm-san-docfeedback@cisco.com

- Restrict—If the two databases are not identical, the ISLs between the switches are isolated.
- Allow—The two databases are merged using the merge rules specified in [Table 5-4](#).

Table 5-4 Database Zone Merge Status

Local Database	Adjacent Database	Merge Status	Results of the Merge
The databases contain zone sets with the same name ¹ but different zones, aliases, and attributes groups.		Successful.	The union of the local and adjacent databases.
The databases contains a zone, zone alias, or zone attribute group object with same name ¹ but different members.		Failed.	ISLs are isolated.
Empty.	Contains data.	Successful.	The adjacent database information populates the local database.
Contains data.	Empty.	Successful.	The local database information populates the adjacent database.

1. In the enhanced zoning mode, the active zone set does not have a name in interop mode 1. The zone set names are only present for full zone sets.



Caution

Remove all non-pWWN-type zone entries on all MDS switches running Cisco SAN-OS prior to merging fabrics if there is a Cisco MDS 9020 switch running FabricWare in the adjacent fabric.

The merge process operates as follows:

1. The software compares the protocol versions. If the protocol versions differ, then the ISL is isolated.
2. If the protocol versions are the same, then the zone policies are compared. If the zone policies differ, then the ISL is isolated.
3. If the zone merge options are the same, then the comparison is implemented based on the merge control setting.
 - a. If the setting is restrict, the active zone set and the full zone set should be identical. Otherwise the link is isolated.
 - b. If the setting is allow, then the merge rules are used to perform the merge.

Licensing Requirements for Zoning

The following table shows the licensing requirements for this feature:

License	License Description
ENTERPRISE_PKG	The enterprise license is required to enable zoning. For a complete explanation of the licensing scheme, see the <i>Cisco MDS 9000 Family NX-OS Licensing Guide</i> .

Send documentation comments to dcnm-san-docfeedback@cisco.com

Guidelines and Limitations

This section includes the guidelines and limitations for this feature:

- [Zone Member Configuration Guidelines, page 5-13](#)
- [Active and Full Zone Set Considerations, page 5-13](#)
- [Read-Only Zone Configuration Guidelines, page 5-15](#)

Zone Member Configuration Guidelines

All members of a zone can communicate with each other. For a zone with N members, $N*(N-1)$ access permissions need to be enabled. Avoid configuring large numbers of targets or large numbers of initiators in a single zone. This type of configuration wastes switch resources by provisioning and managing many communicating pairs (initiator-to-initiator or target-to-target) that will never actually communicate with each other. Configuring a single initiator with a single target is the most efficient approach to zoning.

The following guidelines must be considered when creating zone members:

- Configuring only one initiator and one target for a zone provides the most efficient use of the switch resources.
- Configuring the same initiator to multiple targets is accepted.
- Configuring multiple initiators to multiple targets is not recommended.

Active and Full Zone Set Considerations

Before configuring a zone set, consider the following guidelines:

- Each VSAN can have multiple zone sets but only one zone set can be active at any given time.
- When you create a zone set, that zone set becomes a part of the full zone set.
- When you activate a zone set, a copy of the zone set from the full zone set is used to enforce zoning, and is called the active zone set. An active zone set cannot be modified. A zone that is part of an active zone set is called an active zone.
- The administrator can modify the full zone set even if a zone set with the same name is active. However, the modification will be enforced only upon reactivation.
- When the activation is done, the active zone set is automatically stored in persistent configuration. This enables the switch to preserve the active zone set information across switch resets.
- All other switches in the fabric receive the active zone set so they can enforce zoning in their respective switches.
- Hard and soft zoning are implemented using the active zone set. Modifications take effect during zone set activation.
- An FC ID or Nx port that is not part of the active zone set belongs to the default zone and the default zone information is not distributed to other switches.


**Note**

If one zone set is active and you activate another zone set, the currently active zone set is automatically deactivated. You do not need to explicitly deactivate the currently active zone set before activating a new zone set.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Figure 5-5 shows a zone being added to an activated zone set.

Figure 5-5 Active and Full Zone Sets

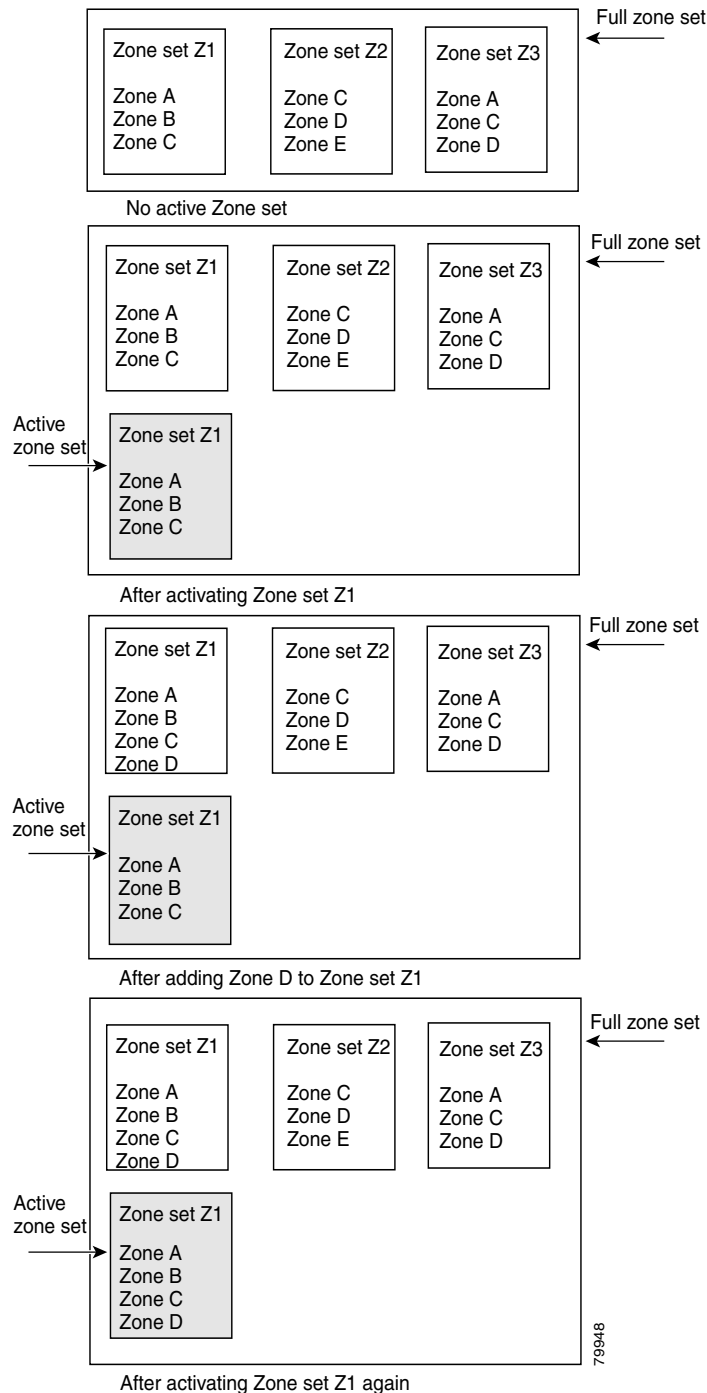

Read-Only Zone Configuration Guidelines

Follow these guidelines when configuring read-only zones:

Send documentation comments to dcnm-san-docfeedback@cisco.com

- If read-only zones are implemented, the switch prevents write access to user data within the zone.
- If two members belong to a read-only zone and to a read-write zone, the read-only zone takes priority and write access is denied.
- LUN zoning can only be implemented in Cisco MDS 9000 Family switches. If LUN zoning is implemented in a switch, you cannot configure interop mode in that switch.
- Read-only volumes are not supported by some operating system and file system combinations (for example, Windows NT or Windows 2000 and NTFS file system). Volumes within read-only zones are not available to such hosts. However, if these hosts are already booted when the read-only zones are activated, then read-only volumes are available to those hosts.
- The read-only zone feature behaves as designed if either the FAT16 or FAT32 file system is used with the previously mentioned Windows operating systems.

Default Settings

Table 5-5 lists the default settings for basic zone parameters.

Table 5-5 **Default Basic Zone Parameters**

Parameters	Default
Default zone policy	Denied to all members.
Full zone set distribute	The full zone set(s) is not distributed.
Zone based traffic priority	Low.
Read-only zones	Read-write attributes for all zones.
Broadcast frames	Sent to all Nx ports.
Broadcast zoning	Disabled.
Enhanced zoning	Disabled.

Configuring Zones

This section describes how to configure zones and includes the following topics:

- [Configuring a Zone Using the Zone Configuration Tool, page 5-16](#)
- [Adding Zone Members, page 5-17](#)
- [Filtering End Devices Based on Name, WWN, or FC ID, page 5-17](#)
- [Adding Multiple End Devices to Multiple Zones, page 5-18](#)
- [Using the Quick Config Wizard, page 5-18](#)

Configuring a Zone Using the Zone Configuration Tool


Detailed Steps

To create a zone and move it into a zone set, follow these steps:

Send documentation comments to dcnm-san-docfeedback@cisco.com

Step 1 Click the **Zone** icon in the toolbar (see [Figure 5-6](#)).

Figure 5-6 Zone Icon

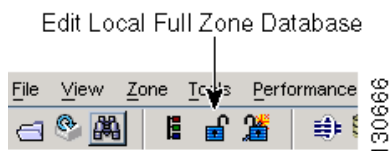

You see the Select VSAN dialog box.

Step 2 Select the VSAN where you want to create a zone and click **OK**.

You see the Edit Local Full Zone Database dialog box.

If you want to view zone membership information, right-click in the All Zone Membership(s) column, and then click **Show Details** for the current row or all rows from the pop-up menu.

Step 3 Click **Zones** in the left pane and click the **Insert** icon to create a zone.

You see the Create Zone dialog box.

Step 4 Enter a zone name.

Step 5 Check one of the following check boxes:

- a. **Read Only**—The zone permits read and denies write.
- b. **Permit QoS traffic with Priority**—You set the priority from the drop-down menu.
- c. **Restrict Broadcast Frames to Zone Members**

Step 6 Click **OK** to create the zone.

If you want to move this zone into an existing zone set, skip to [Step 8](#).

Step 7 Click **Zoneset** in the left pane and click the **Insert** icon to create a zone set.

You see the Zoneset Name dialog box.

Step 8 Enter a zone set name and click **OK**.



Note One of these symbols (\$, -, ^, _) or all alphanumeric characters are supported. In interop mode 2 and 3, this symbol (_) or all alphanumeric characters are supported.

Step 9 Select the zone set where you want to add a zone and click the **Insert** icon or you can drag and drop Zone3 over Zoneset1.

You see the Select Zone dialog box.

Step 10 Click **Add** to add the zone.

Adding Zone Members

Once you create a zone, you can add members to the zone. You can add members using multiple port identification types.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Detailed Steps

To add a member to a zone, follow these steps:

-
- Step 1** Choose **Zone > Edit Local Full Zone Database**.
You see the Select VSAN dialog box.
- Step 2** Select a VSAN and click **OK**.
You see the Edit Local Full Zone Database dialog box for the selected VSAN.
- Step 3** Select the members you want to add from the Fabric pane and click **Add to Zone** or click the zone where you want to add members and click the **Insert** icon.
You see the Add Member to Zone dialog box.



Note The Device Alias radio button is visible only if device alias is in enhanced mode. For more information, see [“Creating Device Aliases” section on page 6-7](#).

- Step 4** Click the browse button and select a port name or check the **LUN** check box and click the browse button to configure LUNs.
- Step 5** Click **Add** to add the member to the zone.



Note When configuring a zone member, you can specify that a single LUN has multiple IDs depending on the operating system. You can select from six different operating systems.

Filtering End Devices Based on Name, WWN, or FC ID

Detailed Steps

To filter the end devices and device aliases, follow these steps:

-
- Step 1** Click the **Zone** icon in the toolbar.
- Step 2** Select Name, WWN, or FC ID from the With drop-down list.
- Step 3** Enter a filter condition, such as *zo1*, in the Filter text box.
- Step 4** Click **Go**.
-

Adding Multiple End Devices to Multiple Zones

Detailed Steps

To add multiple end devices to multiple zones, follow these steps:

Send documentation comments to dcnm-san-docfeedback@cisco.com

-
- Step 1** Click the **Zone** icon in the toolbar.
- Step 2** Press the **Ctrl** key to select multiple end devices.
- Step 3** Right-click the device and then select **Add to Zone**.
- Step 4** Press the **Ctrl** key to select multiple zones from the pop-up window displayed.
- Step 5** Click **Add**.
- Selected end devices are added to the selected zones.
-

Using the Quick Config Wizard



Note

The Quick Config Wizard supports only switch interface zone members.

As of Cisco SAN-OS Release 3.1(1) and NX-OS Release 4.1(2), you can use the Quick Config Wizard on the Cisco MDS 9124 Switch to add or remove zone members per VSAN. You can use the Quick Config Wizard to perform interface-based zoning and to assign zone members for multiple VSANs using Device Manager.



Note

The Quick Config Wizard is supported on the Cisco MDS 9124 Fabric Switch, the Cisco MDS 9134 Fabric Switch, the Cisco Fabric Switch for HP c-Class BladeSystem, and the Cisco Fabric Switch for IBM BladeCenter.

Restrictions

The Quick Config Wizard can only be used on standalone switches that do not have any existing zoning defined on the switch.

Detailed Steps

To add or remove ports from a zone and to zone only the devices within a specific VSAN using Device Manager on the Cisco MDS 9124 Switch, follow these steps:

-
- Step 1** Choose **FC > Quick Config** or click the **Zone** icon in the toolbar.
- You see the Quick Config Wizard (see [Figure 5-8](#)) with all controls disabled and the Discrepancies dialog box (see [Figure 5-7](#)), which shows all unsupported configurations.




Note

You will see the Discrepancies dialog box only if there are any discrepancies.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Figure 5-7 **Discrepancies Dialog Box**

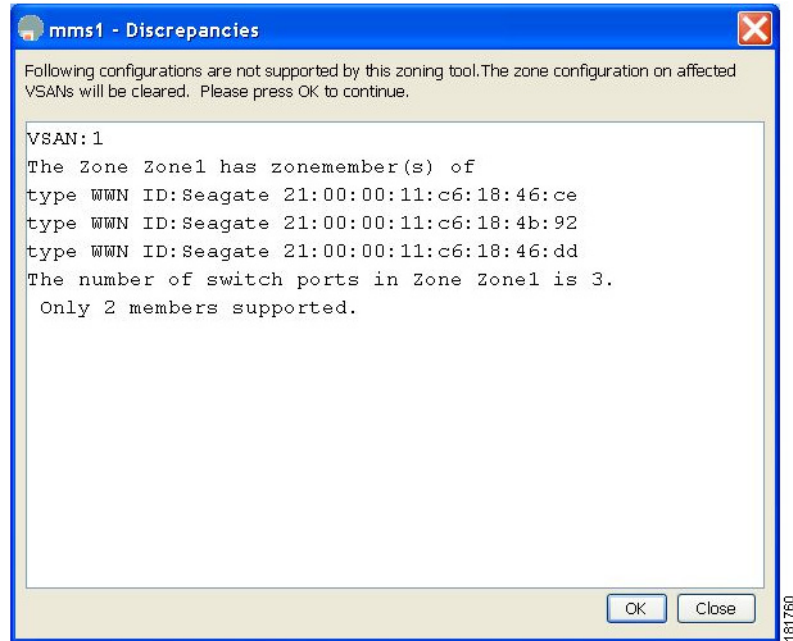

Step 2 Click **OK** to continue.

You see the Quick Config Wizard dialog box (see [Figure 5-8](#)).



Caution

If there are discrepancies and you click **OK**, the affected VSANs in the zone databases are cleared. This might be disruptive if the switch is in use.



Send documentation comments to dcnm-san-docfeedback@cisco.com

- [Converting Zone Members to pWWN-based Members, page 5-24](#)
- [Creating Zone Sets and Adding Member Zones, page 5-25](#)
- [Filtering Zones, Zone Sets, and Device Aliases Based on Name, page 5-26](#)
- [Adding Multiple Zones to Multiple Zone Sets, page 5-26](#)
- [Enabling Full Zone Set Distribution, page 5-26](#)
- [Enabling a One-Time Distribution, page 5-27](#)
- [Importing and Exporting Zone Sets, page 5-27](#)
- [Copying Zone Sets, page 5-28](#)
- [Backing Up Zones, page 5-28](#)
- [Restoring Zones, page 5-29](#)
- [Renaming Zones, Zone Sets, and Aliases, page 5-30](#)
- [Cloning Zones, Zone Sets, FC Aliases, and Zone Attribute Groups, page 5-30](#)
- [Migrating a Non-MDS Database, page 5-30](#)
- [Clearing the Zone Server Database, page 5-31](#)
- [Configuring Zone-Based Traffic Priority, page 5-31](#)
- [Configuring Default Zone QoS Priority Attributes, page 5-31](#)
- [Configuring the Default Zone Policy, page 5-32](#)
- [Configuring Broadcast Zoning, page 5-32](#)
- [Configuring a LUN-Based Zone, page 5-33](#)
- [Assigning LUNs to Storage Subsystems, page 5-33](#)
- [Configuring Read-Only Zones, page 5-33](#)
- [Changing from Basic Zoning to Enhanced Zoning, page 5-34](#)
- [Changing from Enhanced Zoning to Basic Zoning, page 5-34](#)
- [Enabling Enhanced Zoning, page 5-35](#)
- [Modifying the Zone Database, page 5-35](#)
- [Creating Attribute Groups, page 5-36](#)
- [Analyzing a Zone Merge, page 5-36](#)
- [Configuring Zone Merge Control Policies, page 5-36](#)
- [Broadcasting a Zone, page 5-36](#)
- [Compacting the Zone Database for Downgrading, page 5-37](#)

Activating a Zone Set

Changes to a zone set do not take effect in a full zone set until you activate it.

Detailed Steps

To activate an existing zone set, follow these steps:

Send documentation comments to dcnm-san-docfeedback@cisco.com

-
- Step 1** Choose **Zone > Edit Local Full Zone Database**.
You see the Select VSAN dialog box.
- Step 2** Select a VSAN and click **OK**.
You see the Edit Local Full Zone Database dialog box for the selected VSAN.
- Step 3** Click **Activate** to activate the zone set.
You see the pre-activation check dialog box.
- Step 4** Click **Yes** to review the differences.
You see the Local vs. Active Differences dialog box.
- Step 5** Click **Close** to close the dialog box.
You see the Save Configuration dialog box.
- Step 6** Check the **Save Running to Startup Configuration** check box to save all changes to the startup configuration.
- Step 7** Click **Continue Activation** to activate the zone set, or click **Cancel** to close the dialog box and discard any unsaved changes.
You see the Zone Log dialog box, which shows if the zone set activation was successful.
-

Deactivating a Zone Set

Detailed Steps

To deactivate an existing zone set, follow these steps:

-
- Step 1** Right-click the zone set you want to deactivate, and then click **Deactivate** from the pop-up menu.
You see the Deactivate Zoneset dialog box.
- Step 2** Enter deactivate in the text box, and then click **OK**.
You see the Input dialog box.
- Step 3** Enter deactivate in the text box, and then click **OK** to deactivate the zone set.



Note

To enable this option, you need to modify the server.properties file. Refer to the *Cisco DCNM Fundamentals Guide* to know more about modifying server.properties file.

Displaying Zone Membership Information

Detailed Steps

To display zone membership information for members assigned to zones, follow these steps:

Send documentation comments to dcnm-san-docfeedback@cisco.com

Step 1 Choose **Zone > Edit Local Full Zone Database**.

You see the Select VSAN dialog box.

Step 2 Select a VSAN and click **OK**.

You see the Edit Local Full Zone Database dialog box for the selected VSAN.

Step 3 Click **Zones** in the left pane. The right pane lists the members for each zone.



Note

The default zone members are explicitly listed only when the default zone policy is configured as **permit**. When the default zone policy is configured as **deny**, the members of this zone are not shown.

Configuring the Default Zone Access Permission

Detailed Steps

To permit or deny traffic to members in the default zone, follow these steps:

Step 1 Expand a **VSAN** and then select **Default Zone** in the DCNM-SAN Logical Domains pane.

Step 2 Click the **Policies** tab in the Information pane.

You see the zone policies information in the Information pane.

The active zone set is shown in italic type. After you make changes to the active zone set and before you activate the changes, the zone set is shown in boldface italic type.

Step 3 In the Default Zone Behaviour field, choose either **permit** or **deny** from the drop-down menu.

Creating FC Aliases

Detailed Steps

To create an FC alias, follow these steps:

Step 1 Choose **Zone > Edit Local Full Zone Database**.

You see the Select VSAN dialog box.

Step 2 Select a VSAN and click **OK**.

You see the Edit Local Full Zone Database dialog box for the selected VSAN.

Step 3 Click **Aliases** in the lower left pane. The right pane lists the existing aliases.

Step 4 Click the **Insert** icon to create an alias.

You see the Create Alias dialog box.

Step 5 Set the Alias Name and the pWWN.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Step 6 Click **OK** to create the alias.

Adding Members to Aliases

Detailed Steps

To add a member to an alias, follow these steps:

Step 1 Choose **Zone > Edit Local Full Zone Database**.

You see the Select VSAN dialog box.

Step 2 Select a VSAN and click **OK**.

You see the Edit Local Full Zone Database dialog box for the selected VSAN.

Step 3 Select the member(s) you want to add from the Fabric pane and click **Add to Alias** or click the alias where you want to add members and click the **Insert** icon.

You see the Add Member to Alias dialog box.



Note The Device Alias radio button is visible only if device alias is in enhanced mode. For more information, see [“Creating Device Aliases” section on page 6-7](#).

Step 4 Click the browse button and select a port name or check the **LUN** check box and click the browse button to configure LUNs.

Step 5 Click **Add** to add the member to the alias.

Converting Zone Members to pWWN-based Members

You can convert zone and alias members from switch port or FC ID- based membership to pWWN-based membership. You can use this feature to convert to pWWN so that your zone configuration does not change if a card or switch is changed in your fabric.

Detailed Steps

To convert switch port and FC ID members to pWWN members, follow these steps:

Step 1 Choose **Zone > Edit Local Full Zone Database**.

You see the Select VSAN dialog box.

Step 2 Select a VSAN and click **OK**.

You see the Edit Local Full Zone Database dialog box for the selected VSAN.

Step 3 Click the zone you want to convert.

Step 4 Choose **Tools > Convert Switch Port/FCID members to By pWWN**.

You see the conversion dialog box, which lists all members that will be converted.

Send documentation comments to dcnm-san-docfeedback@cisco.com

- Step 5** Verify the changes and click **Continue Conversion**.
- Step 6** Click **Yes** in the confirmation dialog box to convert that member to pWWN-based membership.
-

Creating Zone Sets and Adding Member Zones

The pWWN of the virtual target does not appear in the zoning end devices database in DCNM-SAN. If you want to zone the virtual device with a pWWN, you must enter it in the Add Member to Zone dialog box when creating a zone. However, if the device alias is in enhanced mode, the virtual device names appear in the device alias database in the DCNM-SAN zoning window. In this case, users can choose to select either the device alias name or enter the pWWN in the Add Member to Zone dialog box.

For more information, see the [“Adding Zone Members” section on page 5-17](#).

Set the device alias mode to **enhanced** when using SDV (because the pWWN of a virtual device could change).

For example, SDV is enabled on a switch and a virtual device is defined. SDV assigns a pWWN for the virtual device, and it is zoned based on the pWWN in a zone. If you later disable SDV, this configuration is lost. If you reenables SDV and create the virtual device using the same name, there is no guarantee that it will get the same pWWN again. You will have to rezone the pWWN-based zone. However, if you perform zoning based on the device-alias name, there are no configuration changes required if or when the pWWN changes.

Be sure you understand how device alias modes work before enabling them. Refer to [Chapter 6](#), [“Distributing Device Alias Services”](#) for details and requirements about device alias modes.



Note

If one zone set is active and you activate another zone set, the currently active zone set is automatically deactivated.



Tip

You do not have to copy the running configuration to the startup configuration to store the active zone set. However, you need to copy the running configuration to the startup configuration to explicitly store full zone sets. It is not available across switch resets.



Caution

If you deactivate the active zone set in a VSAN that is also configured for IVR, the active IVR zone set (IVZS) is also deactivated and all IVR traffic to and from the switch is stopped. This deactivation can disrupt traffic in more than one VSAN. Before deactivating the active zone set, check the active zone analysis for the VSAN. To reactivate the IVZS, you must reactivate the regular zone set (refer to the *Cisco MDS 9000 Family NX-OS Inter-VSAN Routing Configuration Guide*).



Caution

If the currently active zone set contains IVR zones, activating the zone set from a switch where IVR is not enabled disrupts IVR traffic to and from that VSAN. We strongly recommend that you always activate the zone set from an IVR-enabled switch to avoid disrupting IVR traffic.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Filtering Zones, Zone Sets, and Device Aliases Based on Name

Detailed Steps

To filter the zones, zone sets, or device aliases, follow these steps:

-
- Step 1** Click the **Zone** icon in the toolbar (see [Figure 5-6](#)).
 - Step 2** Enter a filter condition, such as *zo1*, in the Filter text box.
 - Step 3** Click **Go**.
-

Adding Multiple Zones to Multiple Zone Sets

Detailed Steps

To add multiple zones to multiple zone sets, follow these steps:

-
- Step 1** Click the **Zone** icon in the toolbar (see [Figure 5-6](#)).
 - Step 2** From the tree view, select **Zoneset**.
 - Step 3** Press the **Ctrl** key to select multiple zones.
 - Step 4** Right-click and then select **Add to Zoneset**.
 - Step 5** Press the **Ctrl** key to select multiple zone sets from the pop-up window displayed.
 - Step 6** Click **Add**.

Selected zones are added to the selected zone sets.

Enabling Full Zone Set Distribution

All switches in the Cisco MDS 9000 Family distribute active zone sets when new E port links come up or when a new zone set is activated in a VSAN. The zone set distribution takes effect while sending merge requests to the adjacent switch or while activating a zone set.

Detailed Steps

To enable full zone set and active zone set distribution to all switches on a per-VSAN basis, follow these steps:

-
- Step 1** Expand a **VSAN** and select a zone set in the Logical Domains pane.
You see the zone set configuration in the Information pane. The Active Zones tab is the default.
 - Step 2** Click the **Policies** tab.
You see the configured policies for the zone.

Send documentation comments to dcnm-san-docfeedback@cisco.com

- Step 3** In the Propagation column, choose **fullZoneset** from the drop-down menu.
- Step 4** Click **Apply Changes** to propagate the full zone set.
-

Enabling a One-Time Distribution

Detailed Steps

You can perform a one-time distribution of inactive, unmodified zone sets throughout the fabric. To propagate a one-time distribution of the full zone set, follow these steps:

- Step 1** Choose **Zone > Edit Local Full Zone Database**.
- You see the Edit Local Full Zone Database dialog box.
- Step 2** Click the appropriate zone from the list in the left pane.
- Step 3** Click **Distribute** to distribute the full zone set across the fabric.
-

This procedure only distributes the full zone set information; it does not save the information to the startup configuration. You must explicitly save the running configuration to the startup configuration to save the full zone set information to the startup configuration.



Note

The one-time distribution of the full zone set is supported in **interop 2** and **interop 3** modes, not in **interop 1** mode.

Importing and Exporting Zone Sets

Detailed Steps

To import or export the zone set information from or to an adjacent switch, follow these steps:

- Step 1** Choose **Tools > Merge Fail Recovery**.
- You see the Zone Merge Failure Recovery dialog box.
- Step 2** Click the **Import Active Zoneset** or the **Export Active Zoneset** radio button.
- Step 3** Select the switch from which to import or export the zone set information from the drop-down list.
- Step 4** Select the VSAN from which to import or export the zone set information from the drop-down list.
- Step 5** Select the interface to use for the import process.
- Step 6** Click **OK** to import or export the active zone set.
-

Send documentation comments to dcnm-san-docfeedback@cisco.com

**Note**

Issue the **import** and **export** from a single switch. Importing from one switch and exporting from another switch can lead to isolation again.

Copying Zone Sets

On the Cisco MDS Family switches, you cannot edit an active zone set. However, you can copy an active zone set to create a new zone set that you can edit.

Detailed Steps

To make a copy of a zone set, follow these steps:

-
- Step 1** Choose **Zone > Copy Full Zone Database**.
You see the Copy Full Zone Database dialog box.
 - Step 2** Click the **Active** or the **Full** radio button, depending on which type of database you want to copy.
 - Step 3** Select the source VSAN from the drop-down list.
 - Step 4** If you selected **Copy Full**, select the source switch and the destination VSAN from those drop-down lists.
 - Step 5** Select the destination switch from the drop-down list.
 - Step 6** Click **Copy** to copy the database.
-

**Caution**

If the Inter-VSAN Routing (IVR) feature is enabled and if IVR zones exist in the active zone set, then a zone set copy operation copies all the IVR zones to the full zone database. To prevent copying to the IVR zones, you must explicitly remove them from the full zone set database before performing the copy operation. Refer to the *Cisco MDS 9000 Family NX-OS Inter-VSAN Routing Configuration Guide* for more information on the IVR feature.

Backing Up Zones

Detailed Steps

To back up the full zone configuration, follow these steps:

-
- Step 1** Choose **Zone > Edit Local Full Zone Database**.
You see the Select VSAN dialog box.
 - Step 2** Select a VSAN and click **OK**.
You see the Edit Local Full Zone Database dialog box for the selected VSAN.
 - Step 3** Choose **File > Backup > This VSAN Zones** to back up the existing zone configuration to a workstation using TFTP, SFTP, SCP, or FTP.
You see the Backup Zone Configuration dialog box.

Send documentation comments to dcnm-san-docfeedback@cisco.com

You can edit this configuration before backing up the data to a remote server.

Step 4 Provide the following Remote Options information to back up data onto a remote server:

- a. **Using**—Select the protocol.
- b. **Server IP Address**—Enter the IP address of the server.
- c. **UserName**—Enter the name of the user.
- d. **Password**—Enter the password for the user.
- e. **File Name(Root Path)**—Enter the path and the filename.

Step 5 Click **Backup** or click **Cancel** to close the dialog box without backing up.

Restoring Zones

Detailed Steps

To restore the full zone configuration, follow these steps:

Step 1 Choose **Zone > Edit Local Full Zone Database**.

You see the Select VSAN dialog box.

Step 2 Select a VSAN and click **OK**.

You see the Edit Local Full Zone Database dialog box for the selected VSAN.

Step 3 Choose **File > Restore** to restore a saved zone configuration using TFTP, SFTP, SCP, or FTP.

You see the Restore Zone Configuration dialog box.

You can edit this configuration before restoring it to the switch.

Step 4 Provide the following **Remote Options** information to restore data from a remote server:

- a. **Using**—Select the protocol.
- b. **Server IP Address**—Enter the IP address of the server.
- c. **UserName**—Enter the name of the user.
- d. **Password**—Enter the password for the user.
- e. **File Name**—Enter the path and the filename.

Step 5 Click **Restore** to continue or click **Cancel** to close the dialog box without restoring.



Note

Click **View Config** to see information on how the zone configuration file from a remote server will be restored. When you click **Yes** in this dialog box, you are provided with the CLI commands that are executed. To close the dialog box, click **Close**.



Note

Backup and Restore options are available to switches that run Cisco NX-OS Release 4.1(3) or later.

[Send documentation comments to dcnm-san-docfeedback@cisco.com](mailto:dcnm-san-docfeedback@cisco.com)

Renaming Zones, Zone Sets, and Aliases

Detailed Steps

To rename a zone, zone set, or alias, follow these steps:

-
- Step 1** Choose **Zone > Edit Local Full Zone Database**.
You see the Select VSAN dialog box.
 - Step 2** Select a VSAN and click **OK**.
You see the Edit Local Full Zone Database dialog box for the selected VSAN.
 - Step 3** Click a zone or zone set in the left pane.
 - Step 4** Choose **Edit > Rename**.
An edit box appears around the zone or zone set name.
 - Step 5** Enter a new name.
 - Step 6** Click **Activate** or **Distribute**.
-

Cloning Zones, Zone Sets, FC Aliases, and Zone Attribute Groups

Detailed Steps

To clone a zone, zone set, FC alias, or zone attribute group, follow these steps:

-
- Step 1** Choose **Zone > Edit Local Full Zone Database**.
You see the Select VSAN dialog box.
 - Step 2** Select a VSAN and click **OK**.
You see the Edit Local Full Zone Database dialog box for the selected VSAN.
 - Step 3** Choose **Edit > Clone**.
You see the Clone Zoneset dialog box. The default name is the word Clone followed by the original name.
 - Step 4** Change the name for the cloned entry.
 - Step 5** Click **OK** to save the new clone.
The cloned database now appears along with the original database.
-

Migrating a Non-MDS Database

Detailed Steps

To use the Zone Migration Wizard to migrate a non-MDS database, follow these steps:

Send documentation comments to dcnm-san-docfeedback@cisco.com

-
- Step 1** Choose **Zone > Migrate Non-MDS Database**.
You see the Zone Migration Wizard.
- Step 2** Follow the prompts in the wizard to migrate the database.
-

Clearing the Zone Server Database

You can clear all configured information in the zone server database for the specified VSAN.

To clear the zone server database, refer to the *Cisco MDS 9000 Family NX-OS Fabric Configuration Guide*.



Note Clearing a zone set only erases the full zone database, not the active zone database.



Note After clearing the zone server database, you must explicitly copy the running configuration to the startup configuration to ensure that the running configuration is used when the switch reboots.

Configuring Zone-Based Traffic Priority

Detailed Steps

To configure the zone priority, follow these steps:

-
- Step 1** Expand a **VSAN** and then select a zone set in the Logical Domains pane.
- Step 2** Click the **Policies** tab in the Information pane.
You see the Zone policy information in the Information pane.
- Step 3** Use the check boxes and drop-down menus to configure QoS on the default zone.
- Step 4** Click **Apply Changes** to save the changes.
-

Configuring Default Zone QoS Priority Attributes

QoS priority attribute configuration changes take effect when you activate the zone set of the associated zone.



Note If a member is part of two zones with two different QoS priority attributes, the higher QoS value is implemented. This situation does not arise in the VSAN-based QoS as the first matching entry is implemented.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Detailed Steps

To configure the QoS priority attributes for a default zone, follow these steps:

-
- Step 1** Choose **Zone > Edit Local Full Zone Database**.
You see the Select VSAN dialog box.
 - Step 2** Select a VSAN and click **OK**.
You see the Edit Local Full Zone Database dialog box for the selected VSAN.
 - Step 3** Choose **Edit > Edit Default Zone Attributes** to configure the default zone QoS priority attributes.
 - Step 4** Check the **Permit QoS Traffic with Priority** check box and set the QoS Priority drop-down menu to **low**, **medium**, or **high**.
 - Step 5** Click **OK** to save these changes.
-

Configuring the Default Zone Policy

Detailed Steps

To permit or deny traffic in the default zone, follow these steps:

-
- Step 1** Choose **Zone > Edit Local Full Zone Database**.
You see the Select VSAN dialog box.
 - Step 2** Select a VSAN and click **OK**.
You see the Edit Local Full Zone Database dialog box for the selected VSAN.
 - Step 3** Choose **Edit > Edit Default Zone Attributes** to configure the default zone QoS priority attributes.
You see the Modify Default Zone Properties dialog box.
 - Step 4** Set the Policy drop-down menu to **permit** to permit traffic in the default zone, or set it to **deny** to block traffic in the default zone.
 - Step 5** Click **OK** to save these changes.
-

Configuring Broadcast Zoning

Detailed Steps

To broadcast frames in the basic zoning mode, follow these steps:

-
- Step 1** Expand a **VSAN** and then select a zone set in the Logical Domains pane.
 - Step 2** Click the **Policies** tab in the Information pane.
You see the Zone policy information in the Information pane.
 - Step 3** Check the **Broadcast** check box to enable broadcast frames on the default zone.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Step 4 Click **Apply Changes** to save these changes.

Configuring a LUN-Based Zone

Detailed Steps

To configure a LUN-based zone, follow these steps:

-
- Step 1** Choose **Zone > Edit Local Full Zone Database**.
You see the Select VSAN dialog box.
- Step 2** Select a VSAN and click **OK**.
You see the Edit Local Full Zone Database dialog box for the selected VSAN.
- Step 3** Click the zone where you want to add members and click the **Insert** icon.
You see the Add Member to Zone dialog box.
- Step 4** Click either the **WWN** or **FCID** radio button from the Zone By options to create a LUN-based zone.
- Step 5** Check the **LUN** check box and click the browse button to configure LUNs.
- Step 6** Click **Add** to add this LUN-based zone.
-

Assigning LUNs to Storage Subsystems

LUN masking and mapping restricts server access to specific LUNs. If LUN masking is enabled on a storage subsystem and if you want to perform additional LUN zoning in a Cisco MDS 9000 Family switch, obtain the LUN number for each host bus adapter (HBA) from the storage subsystem and then configure the LUN-based zone procedure provided in the [“Configuring a LUN-Based Zone”](#) section on page 5-33.



Note

Refer to the relevant user manuals to obtain the LUN number for each HBA.



Caution

If you make any errors when assigning LUNs, you might lose data.

Configuring Read-Only Zones

Detailed Steps

To configure read-only zones, follow these steps:

-
- Step 1** Choose **Zone > Edit Local Full Zone Database**.

Send documentation comments to dcnm-san-docfeedback@cisco.com

You see the Select VSAN dialog box.

Step 2 Select a VSAN and click **OK**.

You see the Edit Local Full Zone Database dialog box for the selected VSAN.

Step 3 Click **Zones** in the left pane and click the **Insert** icon to add a zone.

You see the Create Zone Dialog Box.

Step 4 Check the **Read Only** check box to create a read-only zone.

Step 5 Click **OK**.



Note

To configure the read-only option for a default zone, see [“Configuring the Default Zone Policy” section on page 5-32](#).

Changing from Basic Zoning to Enhanced Zoning

Detailed Steps

To change to the enhanced zoning mode from the basic mode, follow these steps:

Step 1 Verify that all switches in the fabric are capable of working in the enhanced mode.

If one or more switches are not capable of working in enhanced mode, then your request to move to enhanced mode is rejected.

Step 2 Set the operation mode to enhanced zoning mode.

You will be able to automatically start a session, acquire a fabric wide lock, distribute the active and full zoning database using the enhanced zoning data structures, distribute zoning policies, and then release the lock. All switches in the fabric then move to the enhanced zoning mode.



Tip

After moving from basic zoning to enhanced zoning, we recommend that you save the running configuration.

Changing from Enhanced Zoning to Basic Zoning

The standards do not allow you to move back to basic zoning. However, Cisco MDS switches allow this move to enable you to downgrade and upgrade to other Cisco SAN-OS or Cisco NX-OS releases.

Detailed Steps

To change to the basic zoning mode from the enhanced mode, follow these steps:

Step 1 Verify that the active and full zone set do not contain any configuration that is specific to the enhanced zoning mode.

Send documentation comments to dcnm-san-docfeedback@cisco.com

If such configurations exist, delete them before proceeding with this procedure. If you do not delete the existing configuration, the Cisco NX-OS software automatically removes them.

Step 2 Set the operation mode to basic zoning mode.

You will be able to automatically start a session, acquire a fabric wide lock, distribute the zoning information using the basic zoning data structure, apply the configuration changes, and release the lock from all switches in the fabric. All switches in the fabric then move to basic zoning mode.



Note If a switch running Cisco SAN-OS Release 2.0(1b) and NX-OS 4(1b) or later, with enhanced zoning enabled is downgraded to Cisco SAN-OS Release 1.3(4), or earlier, the switch comes up in basic zoning mode and cannot join the fabric because all the other switches in the fabric are still in enhanced zoning mode.

Enabling Enhanced Zoning

By default, the enhanced zoning feature is disabled in all switches in the Cisco MDS 9000 Family.

Detailed Steps

To enable enhanced zoning in a VSAN, follow these steps:

-
- Step 1** Expand a VSAN and then select a zone set in the Logical Domains pane.
You see the zone set configuration in the Information pane.
- Step 2** Click the **Enhanced** tab.
You see the current enhanced zoning configuration.
- Step 3** From the Action drop-down menu, choose **enhanced** to enable enhanced zoning in this VSAN.
- Step 4** Click **Apply Changes** to save these changes.
-

Modifying the Zone Database

Modifications to the zone database is done within a session. A session is created at the time of the first successful configuration command. On creation of a session, a copy of the zone database is created. Any changes done within the session are performed on this copy of the zoning database. These changes in the copy zoning database are not applied to the effective zoning database until you commit the changes. Once you apply the changes, the session is closed.

If the fabric is locked by another user and for some reason the lock is not cleared, you can force the operation and close the session. You must have permission (role) to clear the lock in this switch and perform the operation on the switch from where the session was originally created.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Creating Attribute Groups

In enhanced mode, you can directly configure attributes using attribute groups.

To configure attribute groups, refer to the *Cisco MDS 9000 Family NX-OS Fabric Configuration Guide*.

Analyzing a Zone Merge

Detailed Steps

To perform a zone merge analysis, follow these steps:

-
- Step 1** Choose **Zone > Merge Analysis**.
You see the Zone Merge Analysis dialog box.
 - Step 2** Select the first switch to be analyzed from the Check Switch 1 drop-down list.
 - Step 3** Select the second switch to be analyzed from the And Switch 2 drop-down list.
 - Step 4** Enter the VSAN ID where the zone set merge failure occurred in the For Active Zoneset Merge Problems in VSAN Id field.
 - Step 5** Click **Analyze** to analyze the zone merge.
 - Step 6** Click **Clear** to clear the analysis data in the Zone Merge Analysis dialog box.
-

Configuring Zone Merge Control Policies

To configure merge control policies, refer to the *Cisco MDS 9000 Family NX-OS Fabric Configuration Guide*.

Broadcasting a Zone

You can specify an enhanced zone to restrict broadcast frames generated by a member in this zone to members within that zone. Use this feature when the host or storage devices support broadcasting.

[Table 5-6](#) identifies the rules for the delivery of broadcast frames.

Table 5-6 Broadcasting Requirements

Active Zoning?	Broadcast Enabled?	Frames Broadcast?	Comments
Yes	Yes	Yes	Broadcast to all Nx ports that share a broadcast zone with the source of broadcast frames.
No	Yes	Yes	Broadcast to all Nx ports.
Yes	No	No	Broadcasting is disabled.

[Send documentation comments to dcnm-san-docfeedback@cisco.com](mailto:dcnm-san-docfeedback@cisco.com)

**Tip**

If any NL port attached to an FL port shares a broadcast zone with the source of the broadcast frame, then the frames are broadcast to all devices in the loop.

Compacting the Zone Database for Downgrading

Prior to Cisco SAN-OS Release 3.0(1), only 2000 zones are supported per VSAN. If you add more than 2000 zones to a VSAN, a configuration check is registered to indicate that downgrading to a previous release could cause you to lose the zones over the limit. To avoid the configuration check, delete the excess zones and compact the zone database for the VSAN. If there are 2000 zones or fewer after deleting the excess zones, the compacting process assigns new internal zone IDs and the configuration can be supported by Cisco SAN-OS Release 2.x or earlier. Perform this procedure for every VSAN on the switch with more than 2000 zones.

**Note**

A merge failure occurs when a switch supports more than 2000 zones per VSAN but its neighbor does not. Also, zone set activation can fail if the switch has more than 2000 zones per VSAN and not all switches in the fabric support more than 2000 zones per VSAN.

To compact the zone database for downgrading, refer to the *Cisco MDS 9000 Family NX-OS Fabric Configuration Guide*.

Verifying Zone Configuration

This section contains the following topic(s):

- [Displaying Zone Information, page 5-37](#)

Displaying Zone Information

To view zone information and statistics, follow these steps:

-
- | | |
|---------------|---|
| Step 1 | Expand a VSAN and select a zone set in the Logical Domains pane.


You see the zone configuration in the Information pane. |
| Step 2 | Click the Read Only Violations, Statistics tab or the LUN Zoning Statistics tab to view statistics for the selected zone. |
-

Configuration Examples for Zoning

[Figure 5-9](#) illustrates a zone set with two zones, zone 1 and zone 2, in a fabric. Zone 1 provides access from all three hosts (H1, H2, H3) to the data residing on storage systems S1 and S2. Zone 2 restricts the data on S3 to access only by H3. Note that H3 resides in both zones.


Send documentation comments to dcnm-san-docfeedback@cisco.com

Figure 5-9 Fabric with Two Zones

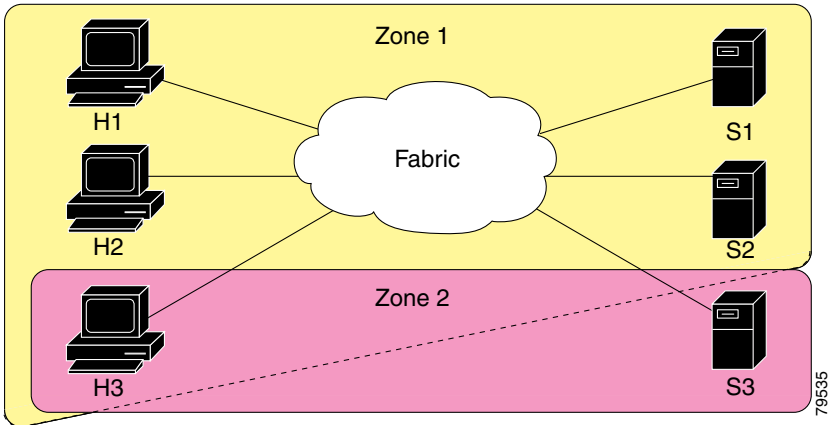

You can partition this fabric into zones using other methods. Figure 5-10 illustrates another possibility. Assume that there is a need to isolate storage system S2 for the purpose of testing new software. To achieve this, zone 3 is configured, which contains only host H2 and storage S2. You can restrict access to just H2 and S2 in zone 3, and to H1 and S1 in zone 1.

Figure 5-10 Fabric with Three Zones

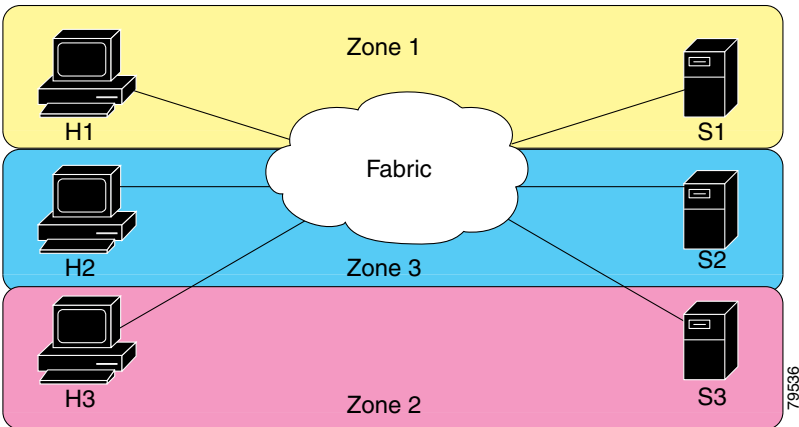

Field Descriptions for Zones

The following are the field descriptions for zoning.

Zone Set Active Zones

Field	Description
Zone	Zone name.
Type	Zone member type.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Field	Description
Switch Interface	Switch interface to which the zone member is connected to.
Name	Zone member name.
WWN	Zone member WWN.
FcId	Zone member FC ID.
LUNs	Zone member LUN.
Status	<ul style="list-style-type: none"> Not in Fabric: If zone member is not in the fabric. Not in VSAN: If zone member is not present in the VSAN. n/a: Cannot determine status. Empty: Member is present in fabric and correct VSAN and can communicate with other members of the zone.

Zone Set Unzoned

Field	Description
Name	Zone member name.
WWN	Zone member WWN.
FcId	Zone member FC ID.

Zone Set Status

Field	Description
Status	Indicates the outcome of the most recent activation or deactivation.
Activation Time	When this entry was most recently activated. If this entry has been activated prior to the last reinitialization of the local network management system, then this value will be N/A.
FailureCause	The reason for the failure of the zone set activation or deactivation.
FailedSwitch	The domain ID of the device in the fabric that has caused the Change Protocol to fail.
Active == Local?	Indicates whether the enforced database is the same as the local database on this VSAN. If true, then they are the same. If false, then they are not the same.
Active Zoneset	The name of the enforced IV zone set.
Hard Zoning	Indicates whether the hard zoning is enabled on this VSAN. Hard zoning is a mechanism by which zoning is enforced in hardware. If true, then hard zoning is enabled on this VSAN. If false, then hard zoning is not enabled on this VSAN.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Zone Set Policies

Field	Description
Default Zone Behavior	Controls the behavior of the default zone on this VSAN. If it is set to permit, then the members of the default zone on this VSAN can communicate with each other. If it is set to deny, then the members of the default zone on this VSAN cannot communicate with each other.
Default Zone ReadOnly	Indicates whether SCSI read operations are allowed on members of the default zone which are SCSI targets, on this VSAN. If true, then only SCSI read operations are permitted. So, this default zone becomes a read-only default zone on this VSAN. If false, then both SCSI read and write operations are permitted.
Default Zone QoS	Specifies whether the QoS attribute for the default zone on this VSAN is enabled. If true, then QoS attribute for the default zone on this VSAN is enabled. If false, then the QoS attribute for the default zone on this VSAN is disabled.
Default Zone QoS Priority	Specifies the QoS priority value.
Default Zone Broadcast	Specifies if broadcast zoning is enabled on this default zone on this VSAN. If true, then it is enabled. If false, then it is disabled.
Propagation	Controls the way zoneset information is propagated during Merge/Change protocols on this VSAN
Read From	Specifies whether the management station wishes to read from the effective database or from the copy database.

Zone Set Active Zones Attributes

Field	Description
Name	Zone name.
Read Only	Indicates if only SCSI read operations are allowed on members of the default zone which are SCSI targets on this VSAN. If true, then only SCSI read operations are permitted. So, this default zone becomes a read-only default zone on this VSAN. If false, then both SCSI read and write operations are permitted.
QoS	Specifies whether the QoS attribute for the default zone on this VSAN is enabled. If true, then QoS attribute for the default zone on this VSAN is enabled. If false, then the QoS attribute for the default zone on this VSAN is disabled.
QoS Priority	Specifies QoS priority value (Low, Medium, or High).
Broadcast	Specifies if broadcast zoning is enabled on this default zone on this VSAN. If true, then it is enabled. If false, then it is disabled.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Zone Set Enhanced

Field	Description
Action	When set to basic(1), results in the zone server operating in the basic mode as defined by FC-GS4 standards. When set to enhanced(2), results in the zone server operating in the enhanced mode as defined by FC-GS4 standards.
Result	The outcome of setting the mode of operation of the local zone server on this VSAN.
Config DB Locked By	Specifies the owner for this session.
Config DB Discard Changes	Assists in committing or clearing the contents of the copy database on this session.
Config DB Result	Indicates the outcome of setting the corresponding instance of <code>czseSessionCntl</code> to <code>commitChanges(1)</code> .
Enforce Full DB Merge	Controls the zone merge behavior. If this object is set to allow, then the merge takes place according to the merge rules. If set to restrict, then if the merging databases are not exactly identical, the Inter-Switch Link (ISL) between the devices is isolated.
Read From	Specifies whether the management station wishes to read from the effective database or from the copy database.

Zone Set Read Only Violations

Field	Description
Violations	The number of data-protected Check Condition error responses sent by the local zone server.

Zone Set Statistics

Field	Description
Merge Req Tx	The number of merge request frames sent by this zone server to other zone servers in the fabric on this VSAN.
Merge Req Rx	The number of merge request frames received by this zone server from other zone servers in the fabric on this VSAN.
Merge Acc Tx	The number of merge accept frames sent by this zone server to other zone servers in the fabric on this VSAN.
Merge Acc Rx	The number of merge accept frames received by this zone server from other zone servers in the fabric on this VSAN.
Change Req Tx	The number of change requests sent by this zone server to other zone servers in the fabric on this VSAN.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Field	Description
Change Req Rx	The number of change requests received by this zone server from other zone servers in the fabric on this VSAN.
Change Acc Tx	The number of change responses sent by this zone server to other zone servers in the fabric on this VSAN.
Change Acc Rx	The number of change responses received by this zone server from other zone servers in the fabric on this VSAN.
GS3 Rej Tx	The number of GS3 requests rejected by this zone server on this VSAN.
GS3 Req Rx	The number of GS3 requests received by this zone server on this VSAN.

Zone Set LUN Zoning Statistics

Field	Description
INQUIRY	The number of SCSI INQUIRY commands that have been received by the local zone server.
REPORT LUN	The number of SCSI Report LUNs commands that have been received by the local zone server. Typically the Report LUNs command is sent only for LUN 0.
SENSE	The number of SCSI SENSE commands that have been received by the local zone server.
Other Cnds	The number of SCSI Read, Write, Seek commands received by the local zone server.
BadInquiry Errors	The number of No LU error responses sent by the local zone server.
Illegal Errors	The number of Illegal Request Check Condition responses sent by the local zone server.

Zone Set Members

Field	Description
Zone	Default zone.
Type	FCID.
Switch Interface	Switch interface to which the zone member is connected to.
Name	Zone member name.
WWN	Zone member WWN.
FcId	Zone member FC ID.

Send documentation comments to dcnm-san-docfeedback@cisco.com

Field	Description
Luns	Zone member LUN.
Status	<ul style="list-style-type: none">Not in Fabric: If zone member is not in the fabric.Not in VSAN: If zone member is not present in the VSAN.n/a: Cannot determine status. Empty: Member is present in fabric and correct VSAN and can communicate with other members of the zone.

Additional References

For additional information related to implementing VSANs, see the following section:

- [Related Document, page 5-43](#)
- [Standards, page 5-43](#)
- [RFCs, page 5-44](#)
- [MIBs, page 5-44](#)

Related Document

Related Topic	Document Title
Cisco MDS 9000 Family Command Reference	<i>Cisco MDS 9000 Family Command Reference</i>

Standards

Standard	Title
No new or modified standards are supported by this feature, and support for existing standards has not been modified by this feature.	—

Send documentation comments to dcnm-san-docfeedback@cisco.com

RFCs

RFC	Title
No new or modified RFCs are supported by this feature, and support for existing RFCs has not been modified.	—

MIBs

MIBs	MIBs Link
<ul style="list-style-type: none"> CISCO-ZS-EXT-MIB CISCO-ZS-MIB 	For more information, go to the following URL: http://www.cisco.com/en/US/products/ps5989/prod_technical_reference_list.html .