




Newer Cisco Validated Design Guides Available

This guide is part of an older series of Cisco Validated Designs.

Cisco strives to update and enhance CVD guides on a regular basis. As we develop a new series of CVD guides, we test them together, as a complete system. To ensure the mutual compatibility of designs in CVD guides, you should use guides that belong to the same series.

-  Open the latest version of this guide
-  Access the latest series of CVD Guides
-  Continue reading this archived version



CVD



Cloud Web Security Using Cisco ASA

TECHNOLOGY DESIGN GUIDE

August 2013



Table of Contents

Preface	1
CVD Navigator	2
Use Cases	2
Scope	2
Proficiency	2
Introduction	3
Technology Use Case	3
Use Case: Manage the Safe Use of Web-Based and Social Networking Applications for Internal Users and Guests	4
Design Overview	4
Deployment Details	10
Configuring Cisco CWS Policies for Internal Users	10
Configuring Cisco ASA for Cisco Cloud Web Security	14
Configuring Cisco CWS Policies for Guest Users	25
Appendix A: Product List	31
Appendix B: Configuration Files	32
IE-ASA5545X	32
Appendix C: Provisioning Email Example	56

Preface

Cisco Validated Designs (CVDs) provide the framework for systems design based on common use cases or current engineering system priorities. They incorporate a broad set of technologies, features, and applications to address customer needs. Cisco engineers have comprehensively tested and documented each CVD in order to ensure faster, more reliable, and fully predictable deployment.

CVDs include two guide types that provide tested and validated design and deployment details:

- **Technology design guides** provide deployment details, information about validated products and software, and best practices for specific types of technology.
- **Solution design guides** integrate or reference existing CVDs, but also include product features and functionality across Cisco products and may include information about third-party integration.

Both CVD types provide a tested starting point for Cisco partners or customers to begin designing and deploying systems using their own setup and configuration.

How to Read Commands

Many CVD guides tell you how to use a command-line interface (CLI) to configure network devices. This section describes the conventions used to specify commands that you must enter.

Commands to enter at a CLI appear as follows:

```
configure terminal
```

Commands that specify a value for a variable appear as follows:

```
ntp server 10.10.48.17
```

Commands with variables that you must define appear as follows:

```
class-map [highest class name]
```

Commands at a CLI or script prompt appear as follows:

```
Router# enable
```

Long commands that line wrap are underlined. Enter them as one command:

```
police rate 10000 pps burst 10000 packets conform-action set-discard-class-  
transmit 48 exceed-action transmit
```

Noteworthy parts of system output or device configuration files appear highlighted, as follows:

```
interface Vlan64  
ip address 10.5.204.5 255.255.255.0
```

Comments and Questions

If you would like to comment on a guide or ask questions, please use the [feedback form](#).

For the most recent CVD guides, see the following site:

<http://www.cisco.com/go/cvd>

CVD Navigator

The CVD Navigator helps you determine the applicability of this guide by summarizing its key elements: the use cases, the scope or breadth of the technology covered, the proficiency or experience recommended, and CVDs related to this guide. This section is a quick reference only. For more details, see the Introduction.

Use Cases

This guide addresses the following technology use cases:

- **Manage the Safe Use of Web-Based and Social Networking Applications for Internal Users and Guests**—All web traffic from the primary-site and remote-site networks accesses the Internet through a centralized Cisco Adaptive Security Appliance (ASA) firewall. Cisco Cloud Web Security (CWS) complements the deep packet inspection and stateful filtering capabilities of the firewall by providing additional web security through a cloud-based service.

For more information, see the “Use Cases” section in this guide.

Scope

This guide covers the following areas of technology and products:

- Cisco ASA 5500-X Series Adaptive Security Appliances provide Internet edge firewall security and intrusion prevention.
- Cisco Cloud Web Security provides granular control over all web content that is accessed.

For more information, see the “Design Overview” section in this guide.

Proficiency

This guide is for people with the following technical proficiencies—or equivalent experience:

- **CCNA Routing and Switching**—1 to 3 years installing, configuring, and maintaining routed and switched networks
- **CCNA Security**—1 to 3 years installing, monitoring, and troubleshooting network devices to maintain integrity, confidentiality, and availability of data and devices

Related CVD Guides



Firewall and IPS Technology Design Guide



Remote Access VPN Technology Design Guide



Remote Mobile Access Technology Design Guide


To view the related CVD guides, click the titles or visit the following site:
<http://www.cisco.com/go/cvd>

Introduction

Web access is a requirement for the day-to-day functions of most organizations, but a challenge exists to maintain appropriate web access for everyone in the organization, while minimizing unacceptable or risky use. A solution is needed to control policy-based web access in order to ensure employees work effectively and ensure that personal web activity does not waste bandwidth, affect productivity, or expose the organization to undue risk.

Another risk associated with Internet access for the organization is the pervasive threat that exists from accessing sites and content. As the monetary gain for malicious activities on the Internet has grown and developed, the methods used to affect these malicious and or illegal activities has grown and become more sophisticated. *Botnets*, one of the greatest threats that exists in the Internet today, are malicious Internet servers (mostly web) being used to host content that then attacks innocent user's browsers as they view the content. These types of attacks have been used very successfully by *bot herders* (originators of the attack) in order to gather millions of infected members that are subject to the whims of the people who now control their machines. Other threats include the still popular and very broad threats of viruses and trojans, in which a user receives a file in some manner and is tricked into running it, and the file then executes malicious code. The third variant uses directed attacks over the network. Examples of these attacks are the Internet worms that gathered so much attention in the early to mid-2000s. These types of risks are depicted in the figure below.

Figure 1 - Business reasons for deploying Cisco Cloud Web Security

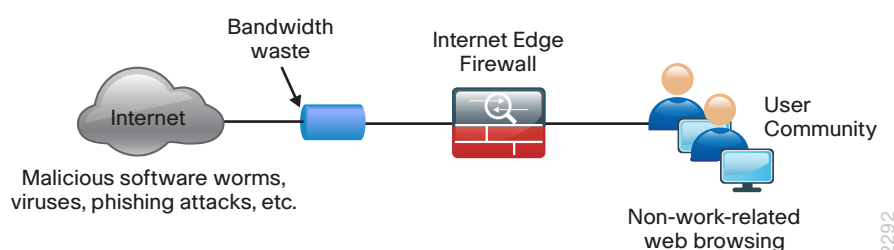

Technology Use Case

Cisco Cloud Web Security (CWS) addresses the need for a corporate web security policy by offering a combination of web usage controls with category and reputation-based control, malware filtering, and data protection.

Browsing websites can be risky, and many websites inadvertently end up distributing compromised or malicious content as a result of inattention to update requirements or lax security configurations. The websites that serve the compromised and malicious content are constantly changing as human-operated and worm-infested computers scan the Internet in search of additional web servers that they can infect in order to continue propagating. This dynamic environment introduces significant challenges to maintain up-to-date Internet threat profiles.

Use Case: Manage the Safe Use of Web-Based and Social Networking Applications for Internal Users and Guests

All web traffic from the primary-site and remote-site networks accesses the Internet through a centralized Cisco Adaptive Security Appliance (ASA) firewall. Cisco CWS complements the deep packet inspection and stateful filtering capabilities of the firewall by providing additional web security through a cloud-based service.

This design guide enables the following security capabilities:

- **Transparent redirection of user web traffic**—Through seamless integration with the Cisco ASA firewall, web traffic is transparently redirected to the Cisco CWS service. No additional hardware or software is required, and no configuration changes are required on user devices.
- **Web filtering**—Cisco CWS supports filters based on predefined content categories, and it also supports more detailed custom filters that can specify application, domain, content type or file type. The filtering rules can be configured to block or warn based on the specific web-usage policies of an organization.
- **Malware protection**—Cisco CWS analyzes every web request in order to determine if content is malicious. CWS is powered by the Cisco Security Intelligence Operations (SIO) whose primary role is to help organizations secure business applications and processes through identification, prevention, and remediation of threats.
- **Differentiated policies**—The Cisco CWS web portal applies policies on a per-group basis. Group membership is determined by the group authentication key of the forwarding firewall, source IP address of the web request, or the Microsoft Active Directory user and domain information of the requestor.


Design Overview

The Cisco Validated Design (CVD) Internet edge design provides the basic framework for the enhancements and additions that are discussed in this guide. A prerequisite for using this design guide is that you must have already followed the guidance in the [Firewall and IPS Design Guide](#).

Through the use of multiple techniques, Cisco CWS provides granular control over all web content that is accessed. These techniques include real-time dynamic web content classification, a URL-filtering database, and file-type and content filters. The policies enforced by Cisco CWS provide strong web security and control for an organization. Cisco CWS policies apply to all users regardless of their location and device type.

Internal users at both the primary site and at remote sites access the Internet by using the primary site's Internet-edge Cisco Adaptive Security Appliance (ASA), which provides stateful firewall and intrusion prevention capabilities. It is simple and straightforward to add Cisco CWS to a Cisco ASA appliance that is already configured and operational. This integration uses the Cloud Web Security Connector for Cisco ASA and requires no additional hardware.

Figure 2 - Cisco Cloud Web Security deployment

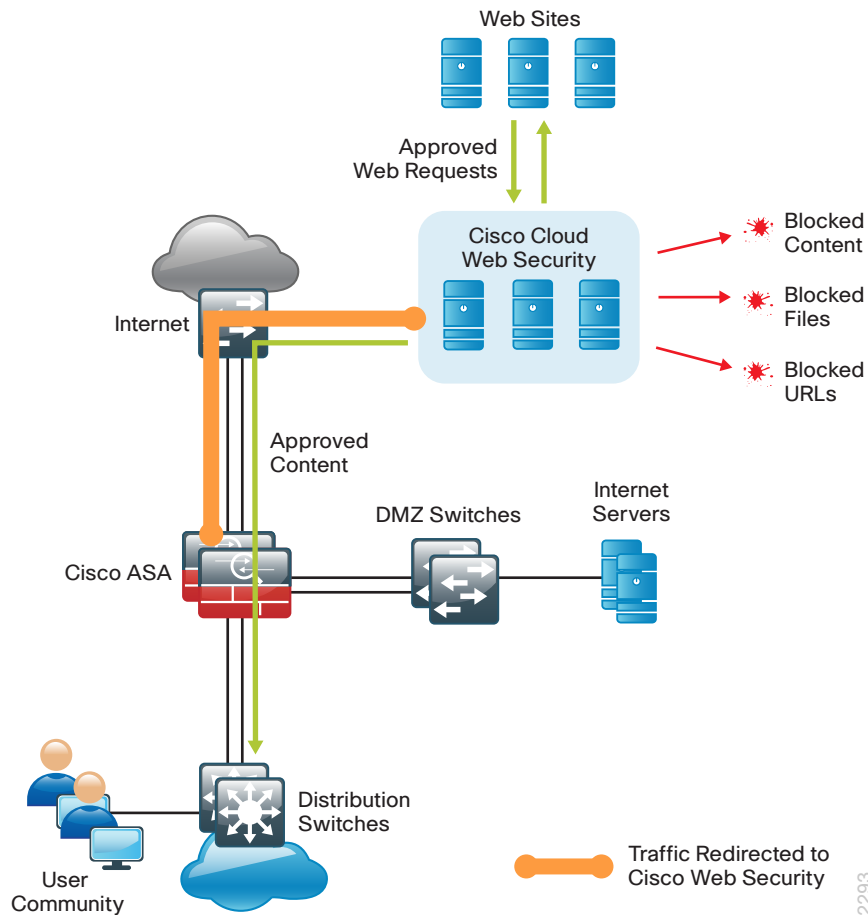

Mobile remote users connect to their organization's network by using devices that generally fall into two categories: laptops and mobile devices such as smartphones and tablets. Because the devices operate and are used differently, the capabilities currently available for each group differ. Laptops and other devices that support the Cisco AnyConnect Secure Mobility Client with Cisco CWS are not required to send web traffic to the primary site. This solution is covered in detail in the [Remote Mobile Access Design Guide](#). If you have an existing CWS deployment for remote-access users, the procedures are similar.

Cisco CWS using Cisco ASA also protects mobile users who are using a non-CWS-enabled Cisco AnyConnect Secure Mobility Client that connects through remote-access VPN as detailed in both the [Remote Access VPN Design Guide](#) and the [Remote Mobile Access Design Guide](#).

Cisco CWS is a cloud-based method of implementing web security that is similar in function to the Cisco Web Security Appliance (WSA), which uses an on-premise appliance for web security. This guide is focused on the deployment of Cisco CWS on Cisco ASA. For more information about using Cisco WSA, see the [Web Security Using Cisco WSA Design Guide](#).

Some key differences between Cisco CWS and Cisco WSA include the items listed in the following table.


Table 1 - Cisco Web Security solution comparison

	Cisco CWS	Cisco WSA
Web/URL filtering	Yes	Yes
Supported protocols	HTTP and HTTPS	HTTP and HTTPS, FTP
Outbreak Intelligence (zero-day malware)	Yes (multiple scanners for malware)	Yes (URL/IP reputation filtering, Multiple scanners for malware)
Remote user security	Direct to cloud using Cisco AnyConnect	VPN backhaul
Remote user security (mobile devices)	VPN backhaul	VPN backhaul
Deployment	Redirect to cloud service	On-premises redirect
Policy and reporting	Web portal (cloud)	On premises

Many organizations provide guest access by using wireless LAN and enforce an acceptable use policy and provide additional security for guest users by using Cisco CWS. This guide includes a section on how to deploy CWS for wireless guest users without requiring any configuration changes to Cisco ASA.

The Cisco ASA firewall family sits between the organization's internal network and the Internet and is a fundamental infrastructural component that minimizes the impact of network intrusions while maintaining worker productivity and data security. The design uses Cisco ASA to implement a service policy that matches specified traffic and redirects the traffic to the Cisco CWS cloud for inspection. This method is considered a transparent proxy, and no configuration changes are required to web browsers on user devices.

Figure 3 - Cisco Cloud Web Security detailed traffic flow

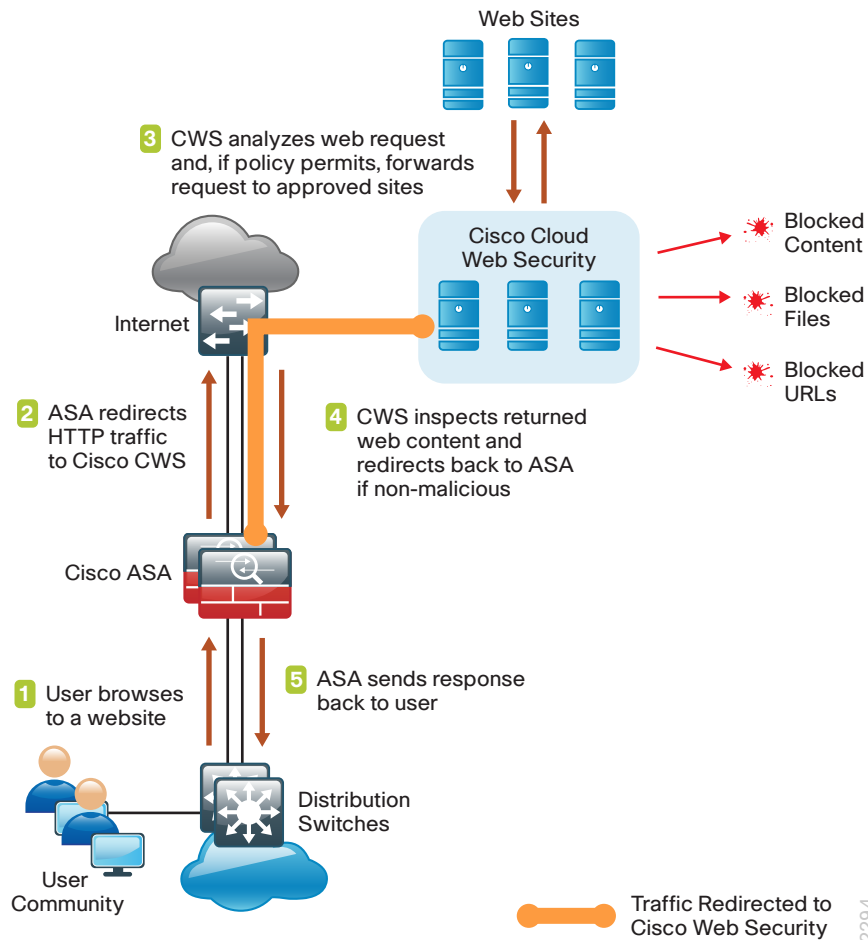

The easiest way to apply the service policy is to modify the existing global service policy to add Cisco CWS inspection. The global policy applies to traffic received on any interface, so the same service policy applies to the following:

- Internal users at the primary site or at remote sites
- Wireless guest users connected to a demilitarized zone (DMZ) network
- Remote-access VPN users using a non-CWS-enabled Cisco AnyConnect client connecting with either the integrated firewall and VPN model or standalone VPN model

The various traffic flows for each of these user types are shown in the following figures.

Figure 4 - Cisco Cloud Web Security with internal and guest users


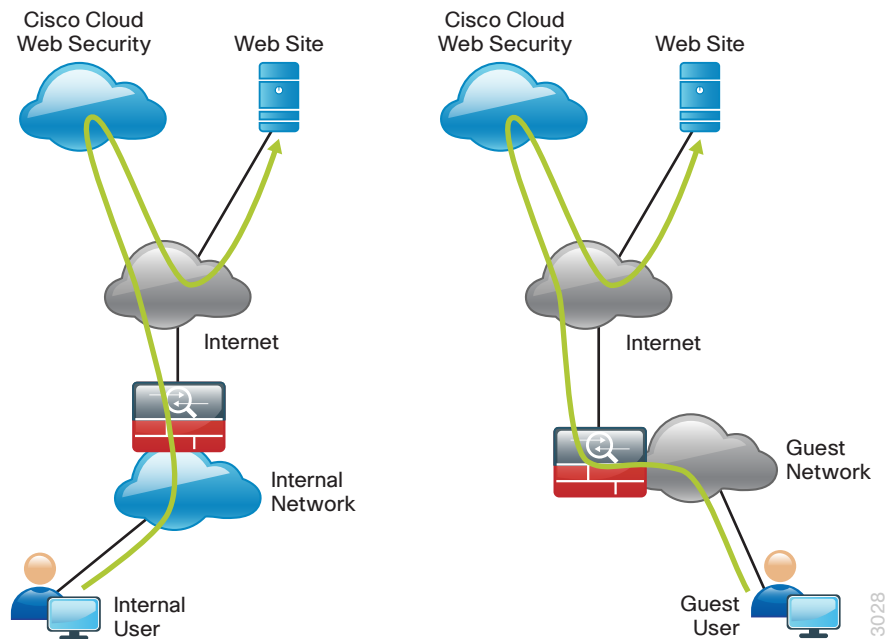


Figure 5 - Cisco Cloud Web Security for mobile devices using remote-access VPN

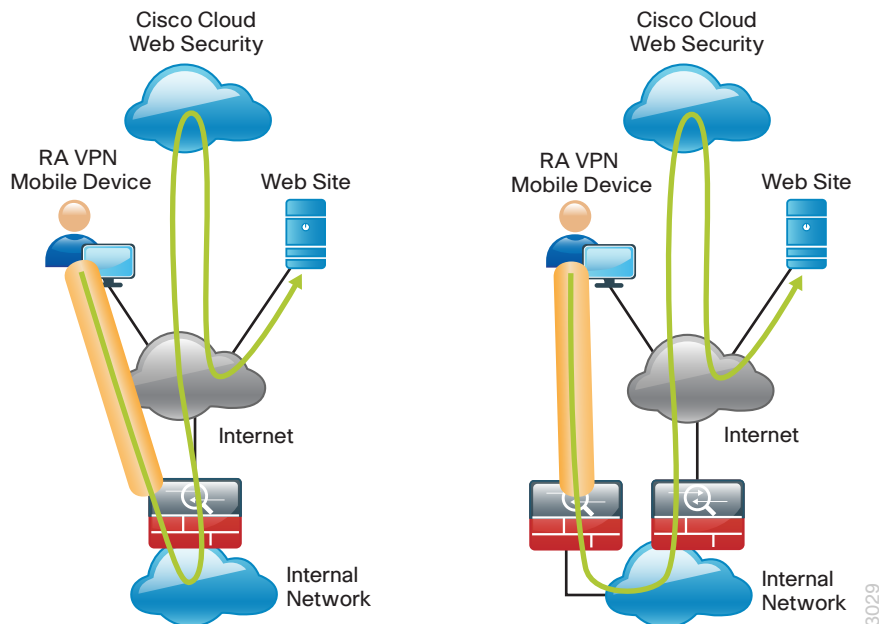

Certain source and destination pairs should be exempted from the service policy, such as remote-access VPN users accessing internal networks or internal users accessing DMZ networks. The creation of these exemptions is shown in the “Deployment Details” chapter of this guide.

The Cisco CWS cloud is accessed through a network of proxy servers, which have a broad geographic distribution in order to support a globally diverse set of customers. Cisco ASA is configured with a primary and secondary proxy server in order to provide high availability. Specific details for which proxy servers to use are provided by Cisco and based on the location and size of the deployment.

Cisco CWS is administered by using the CWS ScanCenter web portal. This includes creating filters and rules for policies, creating groups, activating keys, and viewing reports. All required CWS administration tasks are covered in this guide.

Deployment Details

The first part of this chapter describes how to configure the components in order to enable Cisco CWS service for internal users who access the Internet through the Internet-edge Cisco ASA, including users at the primary site and remote sites. Additionally, if internal users are using remote-access VPN from mobile devices, they are also protected with Cisco CWS. The second part of this chapter describes how to configure CWS for guest users, who may require a different policy than internal users.

PROCESS

Configuring Cisco CWS Policies for Internal Users

1. Enable Cisco CWS security configuration

Procedure 1 Enable Cisco CWS security configuration

This guide assumes you have purchased a Cisco CWS license and created an administrative CWS account that allows a user to log in and manage the account.

Step 1: Access the Cisco CWS ScanCenter Portal at the following location, and then log in with administrator rights:


<https://scancenter.scansafe.com>

Step 2: Navigate to **Admin > Management > Groups**.



Tech Tip

Policy can differ based on group assignment. The simplest method for assigning group membership is to generate a unique key for a group and use that key during deployment to group members. If more granular policies are required, other methods for group assignment include IP address range or mapping to an Active Directory group.

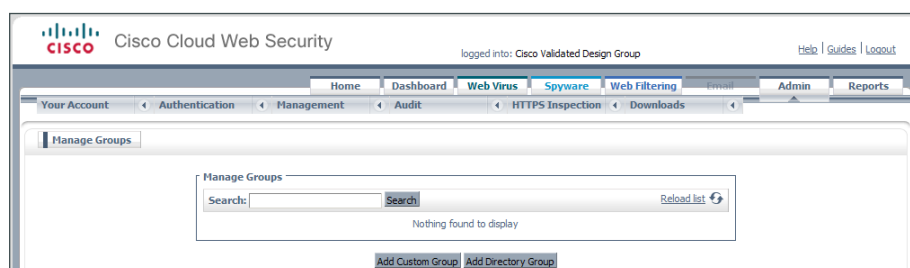


Step 3: Click **Add Custom Group**.

Step 4: In the Add New Custom Group pane, enter the group name (Example: CWS IE-ASA5545X), and then click **Save**.

A group-specific authentication license key is generated for use in the Cisco ASA VPN configuration.

Step 5: Navigate to **Admin > Authentication > Group Keys**.

Step 6: For the group created in Step 4, click **Create Key**. ScanCenter generates a key that it sends to an email address of your choosing.

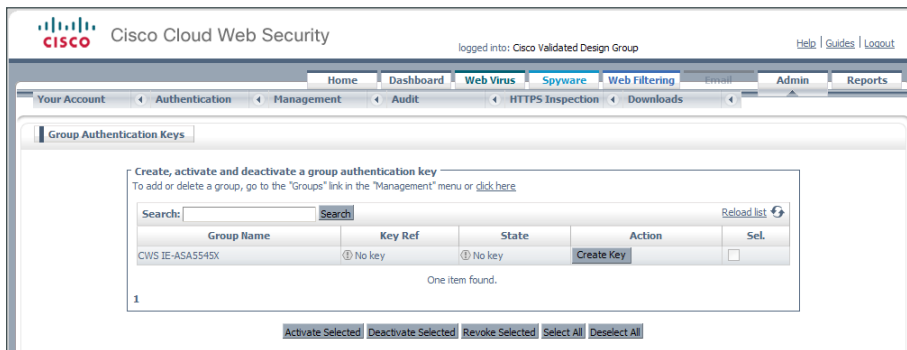

Step 7: Store a copy of this key by copying and pasting it into a secure file, because the key cannot be rebuilt and can only be replaced with a new key. After it is displayed the first time (on generation) and sent in email, you can no longer view it in ScanCenter. After this key is generated, the page options change to Deactivate or Revoke.

Step 8: Navigate to **Web Filtering > Management > Filters**.



Tech Tip


The filtering policy in this guide is an example only. The actual policy implemented should align with the organization's security policy and business requirements.

Step 9: Click **Create a filter**.

Step 10: Assign a name to the filter (Example: Filter Blocked Sites), select the categories blocked by your organization's policy (Examples: Pornography and Hate Speech), and then click **Save**. Access to these categories is completely restricted.

Step 11: Click **Create a filter**.

Step 12: Assign a name to the filter (Example: Filter Warned Sites), select the categories that are considered inappropriate by your organization's policy (Example: Gambling), and then click **Save**. Access to these categories is permitted, but only after accepting a warning message.

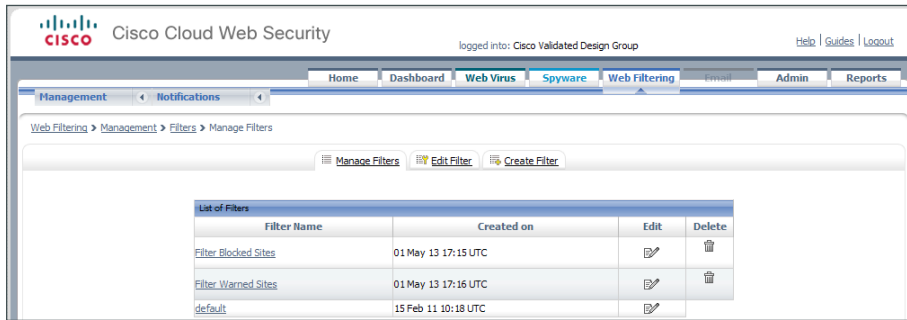

Step 13: Navigate to **Web Filtering > Management > Policy**.

Step 14: Select the Rule name **Default**, change the rule action to **Allow**, and then click **Save**.


Step 15: Click **Create a rule**.

Step 16: Assign a name to the rule (Example: Block_Blocked_Sites), and then select **Active**.

Step 17: In the **Rule Action** list, choose **Block**.

Step 18: In the Define Group pane, click **Add group**.

Step 19: On the dialog box, in the **Search** box, enter the name of the group created in Step 4, and then click **Go**.

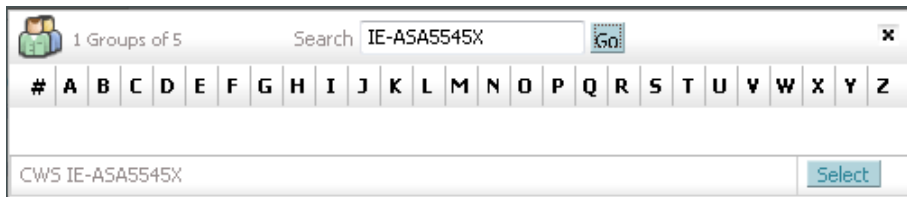

Step 20: Click **Select**, and then click **Confirm Selection**.

Step 21: In the Define Filters pane, click the down arrow labeled **Choose a filter from the list**, select the filter created in Step 10 (Example: Filter Blocked Sites), and then click **Add**.

Step 22: Click **Create rule**. The policy rule has now been created.

The screenshot shows the Cisco Cloud Web Security interface for creating a rule. The breadcrumb navigation is 'Web Filtering > Management > Policy > Create Rule'. The 'Create Rule' tab is selected. The rule details are as follows:

- Name:** Block_Blocked_Sites
- Active:** ☒
- Description:** Apply Rule Action "Block" to filter "Filter Blocked Sites" for group "CWS IE-ASA5545X"
- Rule Action:** Block

Define Group ("WHO")

Search for a group by clicking on "Add Group". To set a group as an exception to the rule, select the corresponding "Set as Exception" box (action of NOT). If no group is selected, this rule will apply to anyone. Adding multiple groups has the action of "OR", so users will need to be in any of the groups listed for the rule to take effect. If a user is a member of both a regular group and an exception group the rule will not be matched.

Group	Set as Exception	Delete
CWS IE-ASA5545X	<input type="checkbox"/>	

Define Filters ("WHAT")

Choose a Filter from the list and click "Add". To set a Filter as an exception to the rule, select the corresponding "Set as Exception" box (action of NOT).

Filter	Set as Exception	Delete
Filter Blocked Sites	<input type="checkbox"/>	

Define Schedule ("WHEN")

Choose a Schedule from the list and click "Add". To set a Schedule as an exception to the rule, select the corresponding "Set as Exception" box (action of NOT). Adding multiple schedule is not recommended unless one is going to be "Set as Exception" (action of "AND NOT")

Schedule	Set as Exception	Delete
anytime	<input type="checkbox"/>	

At the bottom, there are 'Reset' and 'Create Rule' buttons.

Next, create a new rule.

Step 23: Click **Create a rule**.

Step 24: Assign a name to the rule (Example: Warn_Warned_Sites), and then select **Active**.

Step 25: In the **Rule Action** list, choose **Warn**.

Step 26: In the Define Group pane, click **Add group**.

Step 27: On the dialog box, in the search box, enter the name of the group created in Step 4, and then click **Go**.


Step 28: Click **Select**, and then click **Confirm Selection**.

Step 29: In the Define Filters pane, click the down arrow labeled **Choose a filter from the list**, select the filter created in Step 12 (Example: Filter Warned Sites), and then click **Add**.

Step 30: Click **Create rule**. The policy rule has now been created.

Because all rules are evaluated on a first-hit rule, the following is the correct order for the rules in this example:

1. Block Blocked Sites (which blocks access to restricted categories)
2. Warn Warned Sites (which allows access to sites but with a warning)
3. Default (which permits all other sites)

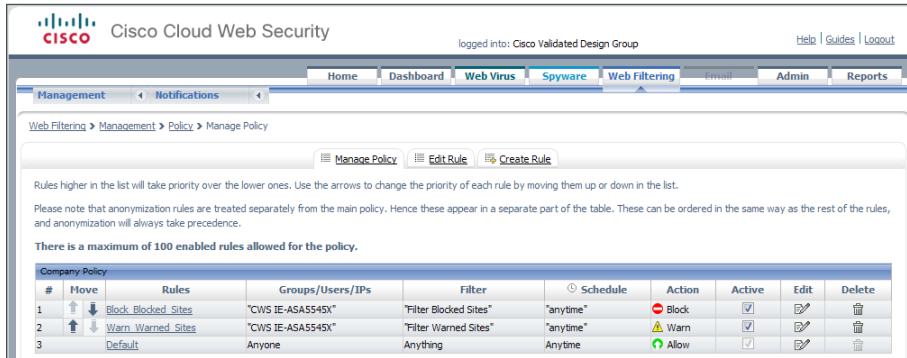

PROCESS

Configuring Cisco ASA for Cisco Cloud Web Security

1. Configure Cisco CWS servers
2. Configure Cisco ASA firewall objects
3. Configure Cisco ASA service policy
4. Test Cisco Cloud Web Security

Procedure 1 Configure Cisco CWS servers

Cisco ASA is configured with a primary and backup server. You will receive a provisioning email after purchasing your Cisco CWS license. This email includes the primary and backup server address that you use for configuring Cisco ASA. An example email is included in "Appendix C" in this guide.

Table 2 - Example of a provisioning email containing Cisco CWS primary and secondary proxy servers

Primary web services proxy address	proxyXXXX.scansafe.net
Web services proxy port	8080
Secondary web services proxy address	proxyXXXX.scansafe.net
Web services proxy port	8080



Tech Tip

Domain Name Service (DNS) is required to resolve the Fully Qualified Domain Name (FQDN) of a Cisco CWS web services proxy server.

Step 1: From a client on the internal network, navigate to the Internet-edge firewall's inside IP address, and then launch Cisco ASA Security Device Manager. (Example: <https://10.4.24.30>)

Step 2: If the firewall is not configured to use DNS resolution, configure it now in **Configuration > Device Management > DNS > DNS Client**.

- Primary DNS Server—**10.4.48.10**
- Domain Name—**cisco.local**

Step 3: In the DNS Lookup pane, scroll to view the **Interface** list, click in the **DNS Enabled** column for the interface that is used to reach the DNS server (Example: inside), choose **True**, and then click **Apply**.

Configuration > Device Management > DNS > DNS Client

Specify how to resolve DNS requests.

DNS Setup

☒ Configure one DNS server group ☐ Configure multiple DNS server groups

Primary DNS Server:

Secondary Servers:

Domain Name:

DNS Lookup

To configure DNS, enable DNS lookup on at least one interface.

Interface	DNS Enabled
dmz-guests	false
dmz-management	false
dmz-tmg	false
dmz-web	false
dmz-wlc	false
inside	true
outside-16	false
outside-17	false

DNS Guard

This function enforces one DNS response per query. If DNS inspection is configured, this option is ignored on that interface.

☐ Enable DNS Guard on all interfaces.

Step 4: In **Configuration > Device Management > Cloud Web Security**, configure the following values from Table 2, and then click **Apply**.

- Primary Server IP Address/Domain Name—**[FQDN of primary web services proxy from provisioning email]**
- Backup Server IP Address/Domain Name—**[FQDN of secondary web services proxy from provisioning email]**
- License Key—**[Group key from Step 6 of Procedure 1, “Enable Cisco CWS security configuration”]**

Configuration > Device Management > Cloud Web Security

Configure Cloud Web Security servers and license parameters

Launch [Cloud Web Security Portal](#) to configure Web content scanning, filtering, malware protection services and retrieving reports.

Primary Server

IP Address/Domain Name:

HTTP Port:

Backup Server

IP Address/Domain Name:

HTTP Port:

Other

Retry Counter:

License Key:

Confirm License Key:

Step 5: In **Monitoring > Properties > Cloud Web Security**, verify the Cisco CWS server status. Your primary server should show a status of REACHABLE.

Monitoring > Properties > Cloud Web Security				
Cloud Web Security Status and Statistics				
Server Status:				
Server	IP Address/FQDN	Status	Active	
Primary	tower1764.scansafe.net(72.37.248.27)	REACHABLE	Active	
Backup	tower1482.scansafe.net	69.174.58.187	Standby	
Server Connection Statistics:				
Server Connection		Value		
Current HTTP sessions		0		
Current HTTPS sessions		0		
Total HTTP Sessions		32717		
Total HTTPS Sessions		0		
Total Fail HTTP sessions		0		
Total Fail HTTPS sessions		0		
Total Bytes In		9157153720		
Total Bytes Out		13998272		
HTTP session Connect Latency in ms(min/max/avg)		53/261/56		
HTTPS session Connect Latency in ms(min/max/avg)		0/0/0		

Procedure 2 Configure Cisco ASA firewall objects

In this procedure, you create the network objects listed in the following table.

Table 3 - Firewall network objects

Network object name	IP address	Netmask
internal-network	10.4.0.0/15	255.254.0.0
dmz-networks	192.168.16.0/21	255.255.248.0

Step 1: Navigate to **Configuration > Firewall > Objects > Network Objects/Groups**.

Step 2: Click **Add > Network Object**.

Step 3: On the Add Network Object dialog box, in the **Name** box, enter the Network object name from Table 3. (Example: internal-network)

Step 4: In the **Type** list, choose **Network**.

Step 5: In the **IP Address** box, enter the IP address of the object from Table 3. (Example: 10.4.0.0)

Step 6: In the **Netmask** box, enter the netmask of the object from Table 3, and then click **OK**. (Example: 255.254.0.0)

The screenshot shows a Windows-style dialog box titled "Add Network Object". It contains the following fields and controls:

- Name:** A text box containing "internal-network".
- Type:** A dropdown menu showing "Network".
- IP Version:** Two radio buttons, "IPv4" (selected) and "IPv6".
- IP Address:** A text box containing "10.4.0.0".
- Netmask:** A text box containing "255.254.0.0".
- Description:** A text box containing "internal network range".
- NAT:** A section with a blue header and a dropdown arrow.
- Buttons:** "OK", "Cancel", and "Help" at the bottom.

Step 7: Repeat Step 2 through Step 6 for all objects listed in Table 3. If the object already exists, then skip to the next object listed in the table.

Step 8: After adding all of the objects listed in Table 3, in the Network Objects/Groups pane, click **Apply**.

Procedure 3 Configure Cisco ASA service policy

The existing global service policy is modified to enable Cisco CWS. The global service policy applies to all interfaces on the firewall, so this procedure enables CWS on all interfaces.

Step 1: In **Configuration > Firewall > Service Policy Rules**, select **Add > Add Service Policy Rule**.

Step 2: Skip the Add Service Policy Rule Wizard – Service Policy dialog box by clicking **Next**.

Step 3: On the Add Service Policy Rule Wizard – Traffic Classification Criteria dialog box, in the **Create a new traffic class** box, enter **cws-http-class**, for Traffic Match Criteria, select **Source and Destination IP Address**, and then click **Next**.

Next, create the single global policy for Cisco CWS in order to match traffic on all interfaces. Because this policy may be used by internal users and remote-access VPN users, certain source and destination traffic pairs are exempted from the CWS policy by using **Do not match** as the action, as shown in the following table. The final policy rule matches all other source and destination pairs.

Table 4 – Example policy for Cisco Cloud Web Security

Action	Source object	Destination object	Service	Description
Do not match	any4	internal-network	ip	Do not match any to internal networks
Do not match	any4	dmz-networks	ip	Do not match any to DMZ networks
Match	any4	any4	tcp/http	Match HTTP to any other networks

The Add Service Policy Rule Wizard allows only a simple policy containing a single match entry, so the following steps are used to configure only the first entry in Table 4. You configure the remaining entries in Table 4 after you complete the first pass of the wizard.

Step 4: On the Add Service Policy Rule Wizard – Traffic Match – Source and Destination Address dialog box, for **Action**, select the action listed in the first row of Table 4. (Example: Do not match)

Step 5: In the **Source** box, enter the source object listed in the first row of Table 4. (Example: any4)

Step 6: In the **Destination** box, enter the destination object listed in the first row of Table 4. (Example: internal-network)

Step 7: In the **Service** box, enter the service listed in the first row of Table 4. (Example: ip), and then click **Next**.

Add Service Policy Rule Wizard - Traffic Match - Source and Destination Address

Action: ☐ Match ☒ Do not match

Source Criteria

Source: any4

User:

Security Group:

Destination Criteria

Destination: internal-network

Security Group:

Service: ip

Description: Do not match any to internal networks

More Options

< Back Next > Cancel Help

Step 8: On the Add Service Policy Rule Wizard – Rule Actions dialog box, click the **Protocol Inspection** tab, select **Cloud Web Security**, and then click **Configure**.

Step 9: On the Select Cloud Web Security Inspect Map dialog box, click **Add**.

Step 10: On the Add Cloud Web Security Inspect Map dialog box, enter a name (Example: CWS-HTTP-80). On the Parameters tab, in the **Default User** box, enter a username that will be used by default (Example: cvd-default).

Step 11: Select **HTTP**, and then click **OK**.


Step 12: On the Select Cloud Web Security Inspect Map dialog box, select the inspect map you created in Step 10, for Cloud Web Security Traffic Action, select **Fail Open**, and then click **OK**.



Tech Tip

A “fail open” or “fail closed” condition, in a security context, refers to the default behavior when a service is unavailable. If “fail open” is configured and the Cisco CWS service is unavailable, the firewall allows user web traffic to pass without restriction. Conversely, if “fail closed” is configured and the Cisco CWS service is unavailable, the firewall blocks user web traffic.

Step 13: On the Add Service Policy Rule Wizard – Rule Actions dialog box, click **Finish**.

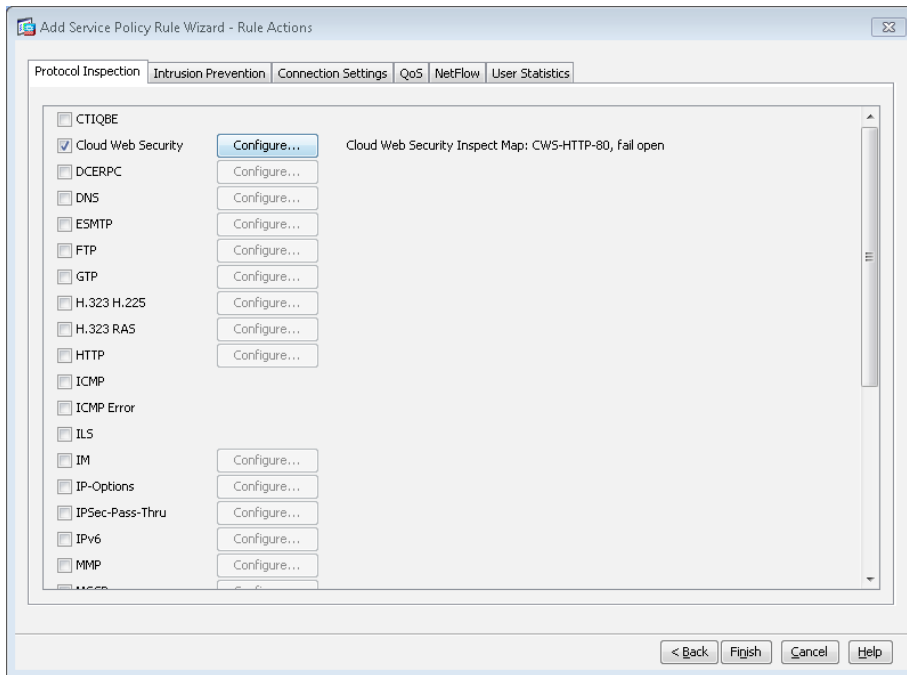


Because the Add Service Policy Rule Wizard allowed only a simple policy containing a single match entry, use the following steps in order to configure the remaining entries from Table 4, which are replicated in Table 5.

Table 5 – Example policy for Cisco Cloud Web Security (remaining entries from Table 4)

Action	Source object	Destination object	Service	Description
Do not match	any4	dmz-networks	ip	Do not match any to DMZ networks
Match	any4	any4	tcp/http	Match HTTP to any other networks

Step 14: In **Configuration > Firewall > Service Policy Rules**, select the highest numbered rule for the Cisco CWS policy (Example: cws-http-class). Right-click to Copy, and then right-click to Paste After.

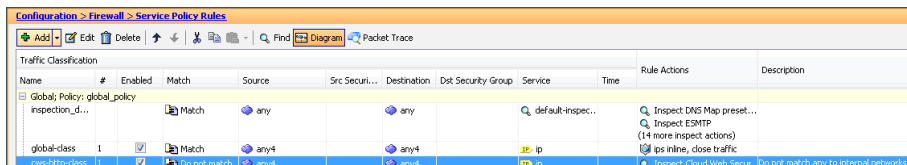

Step 15: Skip the Paste Service Policy Rule Wizard – Service Policy dialog box by clicking **Next**.

Step 16: On the Paste Service Policy Rule Wizard – Traffic Classification Criteria dialog box, select **Add rule to existing traffic class**, and then from list of classes, choose the class created in Step 3 (Example: cws-http-class). Click **Next**.

Paste Service Policy Rule Wizard - Traffic Classification Criteria

☐ Create a new traffic class: global-class1

Description (optional):

Traffic Match Criteria

- ☐ Default: Inspection Traffic
- ☒ Source and Destination IP Address (uses ACL)
- ☐ Tunnel Group
- ☐ TCP or UDP Destination Port
- ☐ RTP Range
- ☐ IP DiffServ CodePoints (DSCP)
- ☐ IP Precedence
- ☐ Any traffic

☒ Add rule to existing traffic class: cws-http-class

Rule can be added to an existing class map if that class map uses access control list (ACL) as its traffic match criterion.

☐ Use class-default as the traffic class.

If traffic does not match a existing traffic class, then it will match the class-default traffic class. Class-default can be used in catch all situation.

< Back Next > Cancel Help

Step 17: On the Paste Service Policy Rule Wizard – Traffic Match – Source and Destination Address dialog box, for **Action**, select the action listed in Table 5. (Example: Do not match)

Step 18: In the **Source** box, enter the source object listed in Table 5. (Example: any4)

Step 19: In the **Destination** box, enter the destination object listed in Table 5. (Example: dmz-networks)

Step 20: In the **Service** box, enter the service listed in Table 5 (Example: ip), and then click **Next**.

Paste Service Policy Rule Wizard - Traffic Match - Source and Destination Address

Action: ☐ Match ☒ Do not match

Source Criteria

Source: any4

User:

Security Group:

Destination Criteria

Destination: dmz-networks

Security Group:

Service: ip

Description: Do not match any to DMZ networks

More Options

< Back Next > Cancel Help

Step 21: On the Paste Service Policy Rule Wizard – Rule Actions dialog box, click **Finish**.

Step 22: Repeat Step 14 through Step 21 for all of the entries in Table 5.

Step 23: Verify that your service policy rules match the following figure, and then click **Apply**.


cws-http-class	1	<input checked="" type="checkbox"/>		Do not match		any4		any4		ip		Inspect Cloud Web Security ..Do not match any to internal networks
	2	<input checked="" type="checkbox"/>		Do not match		any4		any4		ip		Do not match any to DMZ networks
	3	<input checked="" type="checkbox"/>		Match		any4		any4		http		Match HTTP to any other networks

Procedure 4 Test Cisco Cloud Web Security


Step 1: From a client machine on the internal network, open a web browser to the following website:

<http://whoami.scansafe.net>

This website returns diagnostic information from the Cisco CWS service.

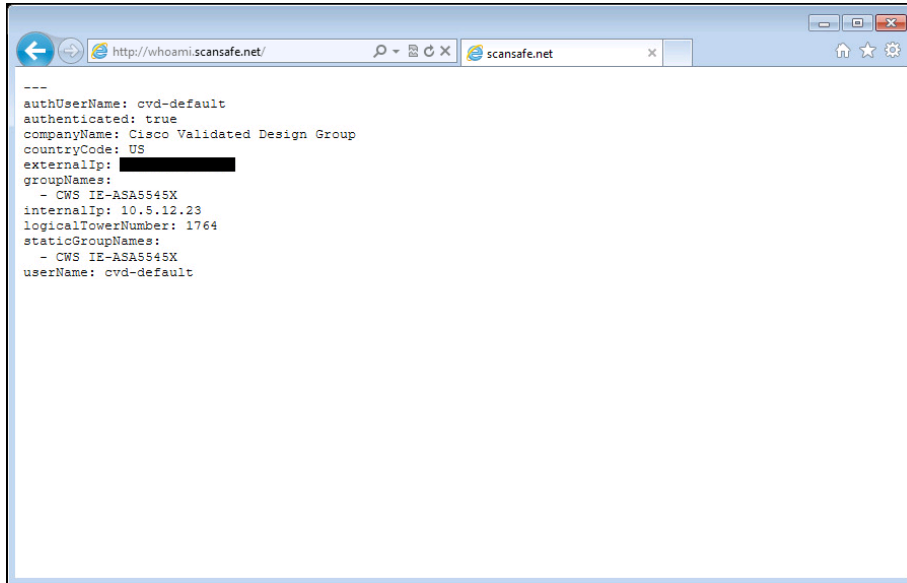

If the service is not active, the following information is returned.

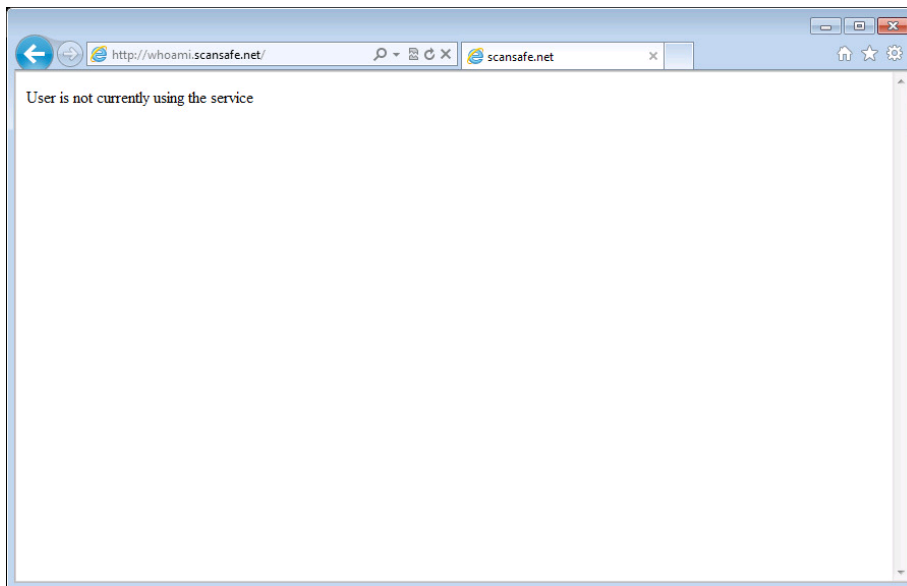

Configuring Cisco CWS Policies for Guest Users

1. Enable Cisco CWS security configuration
2. Test Cisco Cloud Web Security

This is an optional process that is only required if you want to apply a different Cisco CWS policy for guest users. Otherwise, the same policy created for internal users is applied.



Reader Tip


This process assumes that wireless LAN guest access has already been configured following the guidance in the [Campus Wireless LAN Design Guide](#). Only the procedures required to enable Cisco CWS for an existing guest user deployment are included.

Procedure 1 Enable Cisco CWS security configuration

Step 1: Access the Cisco CWS ScanCenter Portal at the following location, and then log in with administrator rights:

<https://scancenter.scansafe.com>

Step 2: Navigate to **Admin > Management > Groups**.

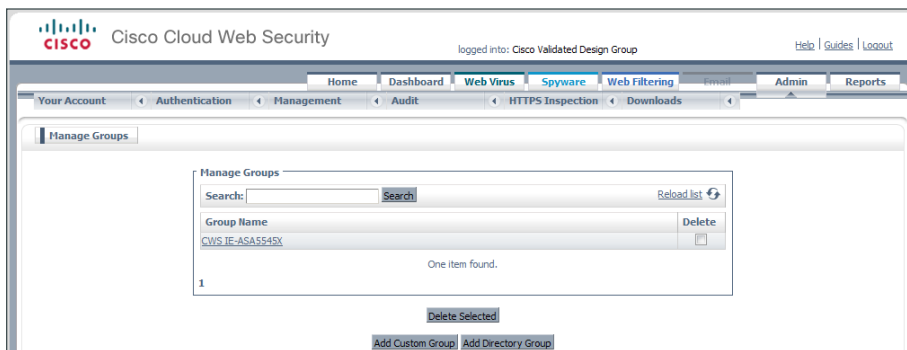

Step 3: Click **Add Custom Group**.

Step 4: On the Add New Custom Group pane, enter the group name (Example: CWS Wireless Guest), and then click **Save**.

Step 5: On the **Admin > Management > Groups** page, click the link for the group created in Step 4.

Step 6: In the IP Expressions pane, add the IP subnet range that corresponds to the wireless guest DMZ configuration in the [Campus Wireless LAN Design Guide](#), click **Save**, and then click **Done**.

The screenshot shows the 'Edit Custom Group' interface in the Cisco Cloud Web Security console. The top navigation bar includes 'Home', 'Dashboard', 'Web Virus', 'Spyware', 'Web Filtering', 'Email', 'Admin', and 'Reports'. The 'Web Filtering' tab is active. The main content area has a breadcrumb trail: 'Your Account > Authentication > Management > Audit > HTTPS Inspection > Downloads'. The 'Edit Custom Group' form has three sections: 1. 'Please enter the new Custom Group name:' with a text box containing 'CWS Wireless Guest' and a 'Save' button. 2. 'IP Expressions' with a text box containing '192.168.28.0/22' and a 'Save' button. 3. 'Users' with a text box and a 'Save' button. A 'Done' button is at the bottom right.

Step 7: Navigate to **Web Filtering > Management > Filters**.



Tech Tip

The filtering policy in this guide is an example only. The actual policy implemented should align with the organization's security policy and business requirements. This example uses a whitelist policy and uses filters that initially select all categories for blocking or warning. Only specifically selected categories are exempt.

If you make the whitelist too limited, web browsing to many common websites may be restricted.


If your policy uses both a block list and a warn list as suggested in this example, all permitted categories must be contained in both lists.

Step 8: Click **Create a filter**.

Step 9: Assign a name to the filter (Example: Filter Warned Sites - Guest), click **Select All**, clear the categories that are considered appropriate by your organization's policy that do not require a warning (Example: News, Shopping, Entertainment and Social Networking), and then click **Save**. Access to all other categories is permitted, but only after accepting a warning message.

Step 10: Click **Create a filter**.

Step 11: Assign a name to the filter (Example: Filter Blocked Sites - Guest), click **Select All**, clear all of the categories that were selected in Step 9. Then clear additional categories that require a warning according to your organization's policy (Examples: Tobacco), and then click **Save**. Access to all other categories is completely restricted.

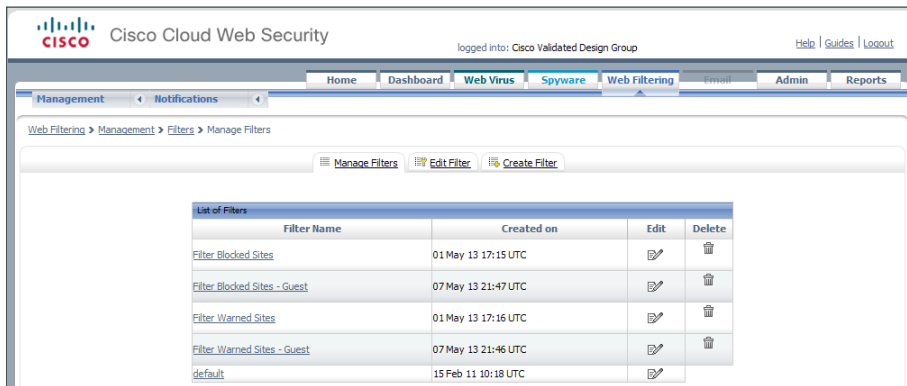

Step 12: Navigate to **Web Filtering > Management > Policy**.

Step 13: Click **Create a rule**.

Step 14: Assign a name to the rule (Example: Block_Blocked_Sites_Guest), and then select **Active**.

Step 15: In the **Rule Action** list, choose **Block**.

Step 16: In the Define Group pane, click **Add group**.

Step 17: On the dialog box, in the **Search** box, enter the name of the group created in Step 4, and then click **Go**.



Step 18: Click **Select**, and then click **Confirm Selection**.

Step 19: In the Define Filters pane, click the down arrow labeled **Choose a filter from the list**, select the filter created in Step 8 (Example: Filter Blocked Sites - Guest), and then click **Add**.

Step 20: Click **Create rule**. The policy rule has now been created.

Cisco Cloud Web Security logged into: Cisco Validated Design Group [Help](#) [Guides](#) [Logout](#)

Management < Notifications < Web Filtering > Management > Policy > Create Rule

[Manage Policy](#) [Edit Rule](#) [Create Rule](#)

Name: Block_Blocked_Sites_Guest **Active:** ☒

Description: Apply Rule Action "Block" to filter "Filter Blocked Sites - Guest" for group "CWS Wireless Guest"

Rule Action: Block

Define Group ("WHO")
Search for a group by clicking on "Add Group". To set a group as an exception to the rule, select the corresponding "Set as Exception" box (action of NOT).
If no group is selected, this rule will apply to anyone. Adding multiple groups has the action of "OR", so users will need to be in any of the groups listed for the rule to take effect. If a user is a member of both a regular group and an exception group the rule will not be matched.

Group	Set as Exception	Delete
CWS Wireless Guest	<input type="checkbox"/>	
Add Group...	<input type="checkbox"/>	

Define Filters ("WHAT")
Choose a Filter from the list and click "Add". To set a Filter as an exception to the rule, select the corresponding "Set as Exception" box (action of NOT).

Filter	Set as Exception	Delete
Filter Blocked Sites - Guest	<input type="checkbox"/>	
Add Filter Filter Blocked Sites - Guest Add...	<input type="checkbox"/>	

Define Schedule ("WHEN")
Choose a Schedule from the list and click "Add". To set a Schedule as an exception to the rule, select the corresponding "Set as Exception" box (action of NOT).
Adding multiple schedule is not recommended unless one is going to be "Set as Exception" (action of "AND NOT")

Schedule	Set as Exception	Delete
anytime	<input type="checkbox"/>	
Add Schedule Choose a schedule from the list Add...	<input type="checkbox"/>	

[Reset](#) [Create Rule](#)

Next, create a new rule.

Step 21: Click **Create a rule**.

Step 22: Assign a name to the rule (Example: Warn_Warned_Sites_Guest), and then select **Active**.

Step 23: In the **Rule Action** list, choose **Warn**.

Step 24: In the Define Group pane, click **Add group**.

Step 25: On the dialog box, in the search box, enter the name of the group created in Step 4, and then click **Go**.

Step 26: Click **Select**, and then click **Confirm Selection**.

Step 27: In the Define Filters pane, click the down arrow labeled **Choose a filter from the list**, select the filter created in Step 9 (Example: Filter Warned Sites - Guest), and then click **Add**.

Step 28: Click **Create rule**. The policy rule has now been created.

Rules higher in the list will take priority over the lower ones. Use the arrows to change the priority of each rule by moving them up or down in the list.

Please note that anonymization rules are treated separately from the main policy. Hence these appear in a separate part of the table. These can be ordered in the same way as the rest of the rules, and anonymization will always take precedence.

There is a maximum of 100 enabled rules allowed for the policy.

#	Move	Rules	Groups/Users/IPs	Filter	Schedule	Action	Active	Edit	Delete
1	↑ ↓	Block Blocked Sites	"CWS IE-ASA5545X"	"Filter Blocked Sites"	"anytime"	Block	<input checked="" type="checkbox"/>		
2	↑ ↓	Warn Warned Sites	"CWS IE-ASA5545X"	"Filter Warned Sites"	"anytime"	Warn	<input checked="" type="checkbox"/>		
3	↑ ↓	Block Blocked Sites Guest	"CWS Wireless Guest"	"Filter Blocked Sites - Guest"	"anytime"	Block	<input checked="" type="checkbox"/>		
4	↑ ↓	Warn Warned Sites Guest	"CWS Wireless Guest"	"Filter Warned Sites - Guest"	"anytime"	Warn	<input checked="" type="checkbox"/>		
5	↑ ↓	Default	Anyone	Anything	Anytime	Allow	<input checked="" type="checkbox"/>		

Because the guest user traffic and internal user traffic is all redirected from the same Cisco ASA, the same group key is used. In order to properly match the guest traffic by the source IP address, the guest rules must be evaluated first.

Step 29: Click the Up arrow next to the Block_Blocked_Sites_Guest rule until it is listed first.

Step 30: Click the Up arrow next to the Warn_Warned_Sites_Guest rule until it is listed second, and then click **Apply Changes**.

Rules higher in the list will take priority over the lower ones. Use the arrows to change the priority of each rule by moving them up or down in the list.

Please note that anonymization rules are treated separately from the main policy. Hence these appear in a separate part of the table. These can be ordered in the same way as the rest of the rules, and anonymization will always take precedence.

There is a maximum of 100 enabled rules allowed for the policy.

#	Move	Rules	Groups/Users/IPs	Filter	Schedule	Action	Active	Edit	Delete
3	↑ ↓	Block Blocked Sites Guest	"CWS Wireless Guest"	"Filter Blocked Sites - Guest"	"anytime"	Block	<input checked="" type="checkbox"/>		
4	↑ ↓	Warn Warned Sites Guest	"CWS Wireless Guest"	"Filter Warned Sites - Guest"	"anytime"	Warn	<input checked="" type="checkbox"/>		
1	↑ ↓	Block Blocked Sites	"CWS IE-ASA5545X"	"Filter Blocked Sites"	"anytime"	Block	<input checked="" type="checkbox"/>		
2	↑ ↓	Warn Warned Sites	"CWS IE-ASA5545X"	"Filter Warned Sites"	"anytime"	Warn	<input checked="" type="checkbox"/>		
5	↑ ↓	Default	Anyone	Anything	Anytime	Allow	<input checked="" type="checkbox"/>		


Apply changes

Procedure 2 Test Cisco Cloud Web Security


Step 1: From a client machine on the guest network, open a web browser to the following website:

<http://whoami.scansafe.net>

This website returns diagnostic information from the Cisco CWS service.

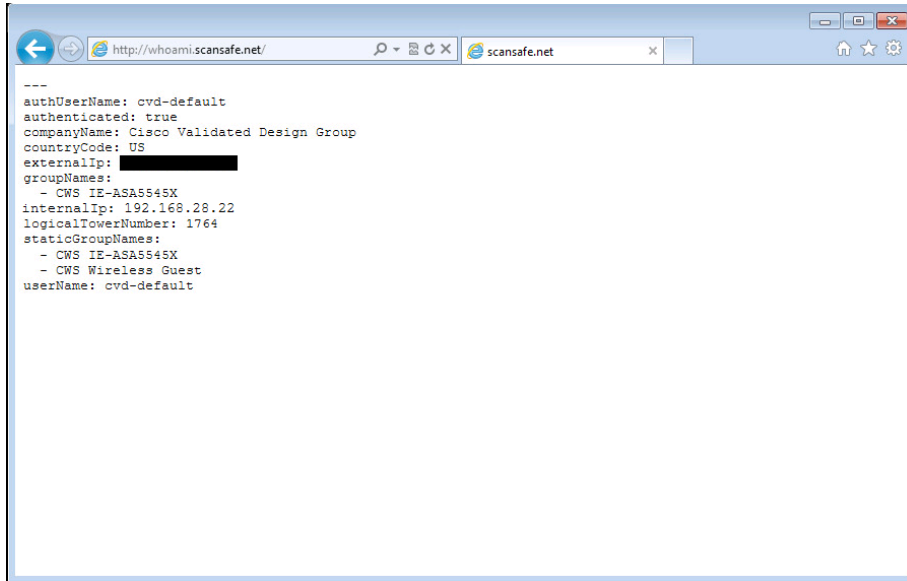

If the service is not active, the following information is returned.

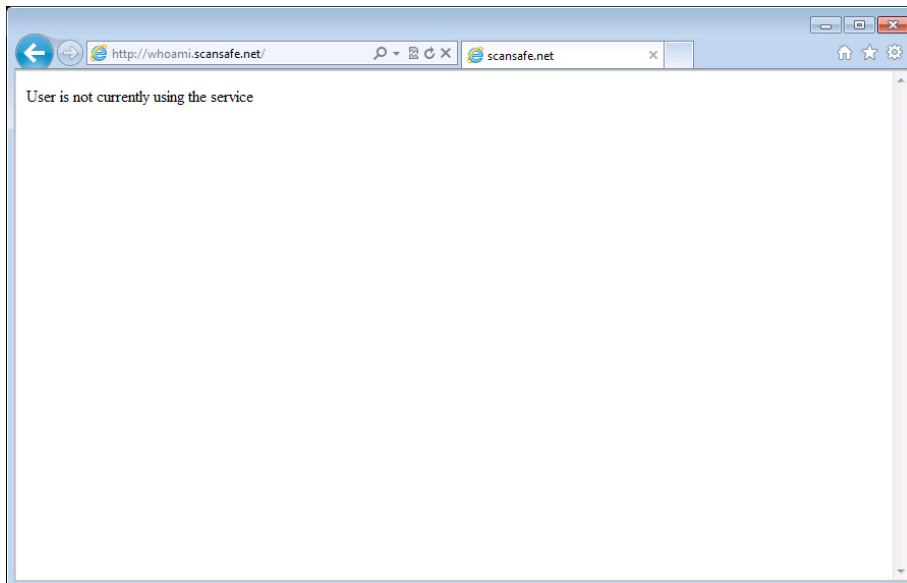

Appendix A: Product List

Internet Edge

Functional Area	Product Description	Part Numbers	Software
Firewall	Cisco ASA 5545-X IPS Edition - security appliance	ASA5545-IPS-K9	ASA 9.0(1) IPS 7.1(7) E4
	Cisco ASA 5525-X IPS Edition - security appliance	ASA5525-IPS-K9	
	Cisco ASA 5515-X IPS Edition - security appliance	ASA5515-IPS-K9	
	Cisco ASA 5512-X IPS Edition - security appliance	ASA5512-IPS-K9	
	Cisco ASA5512-X Security Plus license	ASA5512-SEC-PL	
	Firewall Management	ASDM	7.0(2)

Web Security

Functional Area	Product Description	Part Numbers	Software
Cloud Web Security	Cisco Cloud Web Security (ScanSafe)	Cisco Cloud Web Security	—
	Cisco Cloud Web Security (ScanSafe)	Please Contact your Cisco Cloud Web Security Sales Representative for Part Numbers: scansafe-sales-questions@cisco.com	

Appendix B: Configuration Files

IE-ASA5545X

```
ASA Version 9.0(1)
!
hostname IE-ASA5545X
domain-name cisco.local
enable password 8Ry2YjIyt7RRXU24 encrypted
xlate per-session deny tcp any4 any4
xlate per-session deny tcp any4 any6
xlate per-session deny tcp any6 any4
xlate per-session deny tcp any6 any6
xlate per-session deny udp any4 any4 eq domain
xlate per-session deny udp any4 any6 eq domain
xlate per-session deny udp any6 any4 eq domain
xlate per-session deny udp any6 any6 eq domain
passwd 2KFQnbNIdI.2KYOU encrypted
names
ip local pool RA-pool 10.4.28.1-10.4.31.254 mask 255.255.252.0
!
interface GigabitEthernet0/0
  no nameif
  no security-level
  no ip address
!
interface GigabitEthernet0/0.300
  vlan 300
  nameif inside
  security-level 100
  ip address 10.4.24.30 255.255.255.224 standby 10.4.24.29
  summary-address eigrp 100 10.4.28.0 255.255.252.0 5
!
interface GigabitEthernet0/1
  no nameif
  no security-level
  no ip address
!
interface GigabitEthernet0/1.1116
  description Web Server connection on VLAN 116
  vlan 1116
  nameif dmz-web
  security-level 50
  ip address 192.168.16.1 255.255.255.0 standby 192.168.16.2
```

```

    ipv6 address 2001:db8:a:1::1/64 standby 2001:db8:a:1::2
    ipv6 enable
!
interface GigabitEthernet0/1.1117
    vlan 1117
    nameif dmz-email
    security-level 50
    ip address 192.168.17.1 255.255.255.0 standby 192.168.17.2
!
interface GigabitEthernet0/1.1118
    vlan 1118
    nameif dmz-dmvpn
    security-level 75
    ip address 192.168.18.1 255.255.255.0 standby 192.168.18.2
!
interface GigabitEthernet0/1.1119
    vlan 1119
    nameif dmz-wlc
    security-level 50
    ip address 192.168.19.1 255.255.255.0 standby 192.168.19.2
!
interface GigabitEthernet0/1.1122
    description Interface to the TMG DMZ
    vlan 1122
    nameif dmz-tmg
    security-level 50
    ip address 192.168.22.1 255.255.255.0 standby 192.168.22.2
!
interface GigabitEthernet0/1.1123
    vlan 1123
    nameif dmz-management
    security-level 50
    ip address 192.168.23.1 255.255.255.0 standby 192.168.23.2
!
interface GigabitEthernet0/1.1128
    vlan 1128
    nameif dmz-guests
    security-level 10
    ip address 192.168.28.1 255.255.252.0 standby 192.168.28.2
!
interface GigabitEthernet0/2
    description LAN/STATE Failover Interface
!
interface GigabitEthernet0/3
    no nameif
    no security-level
    no ip address

```

```

!
interface GigabitEthernet0/3.16
  description Primary Internet connection on VLAN 16
  vlan 16
  nameif outside-16
  security-level 0
  ip address 172.16.130.124 255.255.255.0 standby 172.16.130.123
  ipv6 address 2001:db8:a::1/64 standby 2001:db8:a::2
  ipv6 enable
!
interface GigabitEthernet0/3.17
  description Resilient Internet connection on VLAN 17
  vlan 17
  nameif outside-17
  security-level 0
  ip address 172.17.130.124 255.255.255.0 standby 172.17.130.123
!
interface GigabitEthernet0/4
  shutdown
  no nameif
  no security-level
  no ip address
!
interface GigabitEthernet0/5
  shutdown
  no nameif
  no security-level
  no ip address
!
interface GigabitEthernet0/6
  shutdown
  no nameif
  no security-level
  no ip address
!
interface GigabitEthernet0/7
  shutdown
  no nameif
  no security-level
  no ip address
!
interface Management0/0
  management-only
  nameif IPS-mgmt
  security-level 0
  no ip address
!

```

```

boot system disk0:/asa901-smp-k8.bin
ftp mode passive
clock timezone PST -8
clock summer-time PDT recurring
dns domain-lookup inside
dns server-group DefaultDNS
  name-server 10.4.48.10
  domain-name cisco.local
same-security-traffic permit intra-interface
object network internal-network
  subnet 10.4.0.0 255.254.0.0
  description The organization's internal network range
object network dmz-networks
  subnet 192.168.16.0 255.255.248.0
  description The organization's DMZ network range
object network internal-network-ISPa
  subnet 10.4.0.0 255.254.0.0
  description PAT traffic from inside out the primary Internet connection
object network internal-network-ISPb
  subnet 10.4.0.0 255.254.0.0
  description PAT traffic from inside out the secondary internet connection
object network outside-webserver-ISPa
  host 172.16.130.100
  description WebServer on ISP A
object network dmz-webserver-ISPa
  host 192.168.16.100
object network outside-webserver-ISPb
  host 172.17.130.100
  description WebServer on ISPb
object network dmz-webserver-ISPb
  host 192.168.16.100
  description NAT the webserver in the DMZ to outside address on ISP B
object network dmz-dmvpn-1
  host 192.168.18.10
  description NAT the primary DMVPN hub router in the DMZ to ISP A
object network dmz-dmvpn-2
  host 192.168.18.11
  description NAT the secondary DMVPN hub router in the DMZ to ISP B
object network outside-dmvpn-ISPa
  host 172.16.130.1
  description DMVPN hub router on ISP A
object network outside-dmvpn-ISPb
  host 172.17.130.1
  description DMVPN hub router on ISP B
object network dmz-web-net-v6
  subnet 2001:db8:a:1::/64
object network dmz-webserver-isp-a-v6

```

```

host 192.168.16.111
object network outside-webserver-ispav6
  host 2001:db8:a::111
object network dmz-ipv6-natpool
  range 192.168.16.32 192.168.16.63
object network outside-IPv6-all
  subnet ::/0
object network dmz-guest-network-ISPa
  subnet 192.168.28.0 255.255.252.0
  description DMZ outside PAT addresses for ISPa
object network internal-wlc-5508
  host 10.4.46.64
  description Internal 5508 WLC
object network internal-wlc-flex-7500
  host 10.4.46.68
  description Internal FlexConnect 7500 WLC
object network dmz-wlc-2504-1
  host 192.168.19.56
  description Primary 2504 Anchor Controller for Guest Wireless Access
object network dmz-wlc-5508
  host 192.168.19.54
  description 5508 Anchor Controller for Guest Wireless Access
object network dmz-wlc-2504-2
  host 192.168.19.57
  description Resilient 2504 Anchor Controller for Guest Wireless
object network internal-aaa
  host 10.4.48.15
  description Internal AAA Server
object network internal-ntp
  host 10.4.48.17
  description Internal NTP Server
object network internal-dhcp
  host 10.4.48.10
  description Internal DHCP Server
object network internal-dns
  host 10.4.48.10
  description Internal DNS Server
object network dmz-wlc-primary-5508-RP
  host 192.168.19.154
  description Primary WLC Redundancy Port
object network dmz-wlc-resilient-5508-RP
  host 192.168.19.155
  description Resilient WLC Redundancy Port
object network internal-exchange
  host 10.4.48.25
  description Internal Exchange server
object network NETWORK_OBJ_10.4.28.0_22

```

```

    subnet 10.4.28.0 255.255.252.0
object network internal_ISE-1
    host 10.4.48.46
    description Internal ISE-AdvGuest Server
object network outside-esa-ISPa
    host 172.16.130.25
object network dmz-esa370-ISPa
    host 192.168.17.25
    description ESAC370 on email DMZ
object network outside-esa-ISPb
    host 172.17.130.25
object network dmz-esa370-ISPb
    host 192.168.17.25
    description ESAC370 on email DMZ
object network 5505-pool
    subnet 10.4.156.0 255.255.252.0
    description 5505 Teleworker Subnet
object network asdm-websecproxy-115-111-223-66
    host 115.111.223.66
object network asdm-websecproxy-122-50-127-66
    host 122.50.127.66
object network asdm-websecproxy-184-150-236-66
    host 184.150.236.66
object network asdm-websecproxy-196-26-220-66
    host 196.26.220.66
object network asdm-websecproxy-201-94-155-66
    host 201.94.155.66
object network asdm-websecproxy-202-167-250-90
    host 202.167.250.90
object network asdm-websecproxy-202-167-250-98
    host 202.167.250.98
object network asdm-websecproxy-202-177-218-66
    host 202.177.218.66
object network asdm-websecproxy-202-79-203-98
    host 202.79.203.98
object network asdm-websecproxy-46-255-40-58
    host 46.255.40.58
object network asdm-websecproxy-46-255-40-90
    host 46.255.40.90
object network asdm-websecproxy-46-255-40-98
    host 46.255.40.98
object network asdm-websecproxy-69-10-152-66
    host 69.10.152.66
object network asdm-websecproxy-69-174-58-179
    host 69.174.58.179
object network asdm-websecproxy-69-174-58-187
    host 69.174.58.187

```



```
object network asdm-websecproxy-69-174-87-131
  host 69.174.87.131
object network asdm-websecproxy-69-174-87-163
  host 69.174.87.163
object network asdm-websecproxy-69-174-87-171
  host 69.174.87.171
object network asdm-websecproxy-69-174-87-75
  host 69.174.87.75
object network asdm-websecproxy-70-39-176-115
  host 70.39.176.115
object network asdm-websecproxy-70-39-176-123
  host 70.39.176.123
object network asdm-websecproxy-70-39-176-131
  host 70.39.176.131
object network asdm-websecproxy-70-39-176-139
  host 70.39.176.139
object network asdm-websecproxy-70-39-176-35
  host 70.39.176.35
object network asdm-websecproxy-70-39-176-59
  host 70.39.176.59
object network asdm-websecproxy-70-39-177-35
  host 70.39.177.35
object network asdm-websecproxy-70-39-177-43
  host 70.39.177.43
object network asdm-websecproxy-70-39-231-107
  host 70.39.231.107
object network asdm-websecproxy-70-39-231-163
  host 70.39.231.163
object network asdm-websecproxy-70-39-231-171
  host 70.39.231.171
object network asdm-websecproxy-70-39-231-180
  host 70.39.231.180
object network asdm-websecproxy-70-39-231-182
  host 70.39.231.182
object network asdm-websecproxy-70-39-231-188
  host 70.39.231.188
object network asdm-websecproxy-70-39-231-190
  host 70.39.231.190
object network asdm-websecproxy-70-39-231-91
  host 70.39.231.91
object network asdm-websecproxy-72-37-244-163
  host 72.37.244.163
object network asdm-websecproxy-72-37-244-171
  host 72.37.244.171
object network asdm-websecproxy-72-37-248-19
  host 72.37.248.19
object network asdm-websecproxy-72-37-248-27
```

```
host 72.37.248.27
object network asdm-websecproxy-72-37-249-139
  host 72.37.249.139
object network asdm-websecproxy-72-37-249-147
  host 72.37.249.147
object network asdm-websecproxy-72-37-249-163
  host 72.37.249.163
object network asdm-websecproxy-72-37-249-171
  host 72.37.249.171
object network asdm-websecproxy-72-37-249-195
  host 72.37.249.195
object network asdm-websecproxy-72-37-249-203
  host 72.37.249.203
object network asdm-websecproxy-80-254-147-251
  host 80.254.147.251
object network asdm-websecproxy-80-254-148-194
  host 80.254.148.194
object network asdm-websecproxy-80-254-150-66
  host 80.254.150.66
object network asdm-websecproxy-80-254-154-66
  host 80.254.154.66
object network asdm-websecproxy-80-254-154-98
  host 80.254.154.98
object network asdm-websecproxy-80-254-155-66
  host 80.254.155.66
object network asdm-websecproxy-80-254-158-147
  host 80.254.158.147
object network asdm-websecproxy-80-254-158-155
  host 80.254.158.155
object network asdm-websecproxy-80-254-158-179
  host 80.254.158.179
object network asdm-websecproxy-80-254-158-187
  host 80.254.158.187
object network asdm-websecproxy-80-254-158-211
  host 80.254.158.211
object network asdm-websecproxy-80-254-158-219
  host 80.254.158.219
object network asdm-websecproxy-80-254-158-35
  host 80.254.158.35
object network dmz-tmg-ISPa
  host 192.168.22.25
  description TMG on dmz-tmg
object network dmz-tmg-ISPb
  host 192.168.22.25
  description TMG on dmz-tmg
object network outside-tmg-ISPa
  host 172.16.130.55
```

```

description TMG server on ISP-A
object network outside-tmg-ISPb
  host 172.17.130.55
description TMG server on ISP-B
object network internal-ad
  host 10.4.48.10
description Internal Active Directory Server
object-group service DM_INLINE_SERVICE_1
  service-object tcp destination eq ftp
  service-object tcp destination eq ftp-data
  service-object tcp destination eq tacacs
  service-object udp destination eq ntp
  service-object udp destination eq syslog
object-group service DM_INLINE_TCP_1 tcp
  port-object eq www
  port-object eq https
object-group service DM_INLINE_TCP_2 tcp
  port-object eq www
  port-object eq https
object-group icmp-type DM_INLINE_ICMP_1
  icmp-object echo
  icmp-object echo-reply
object-group service DM_INLINE_SERVICE_2
  service-object esp
  service-object udp destination eq 4500
  service-object udp destination eq isakmp
object-group service DM_INLINE_SERVICE_3
  service-object esp
  service-object udp destination eq 4500
  service-object udp destination eq isakmp
object-group service DM_INLINE_TCP_3 tcp
  port-object eq www
  port-object eq https
object-group network internal-wlc-group
  description Internal Wireless LAN Controllers
  network-object object internal-wlc-5508
  network-object object internal-wlc-flex-7500
object-group network dmz-wlc-group
  description Wireless LAN Controllers in the DMZ
  network-object object dmz-wlc-2504-1
  network-object object dmz-wlc-5508
  network-object object dmz-wlc-2504-2
object-group service DM_INLINE_SERVICE_4
  service-object tcp destination eq tacacs
  service-object udp destination eq 1812
  service-object udp destination eq 1813
object-group service DM_INLINE_TCP_4 tcp

```

```

port-object eq ftp
port-object eq ftp-data
object-group service DM_INLINE_SERVICE_5
  service-object 97
  service-object udp destination eq 16666
  service-object udp destination eq 5246
  service-object udp destination eq 5247
object-group service DM_INLINE_SERVICE_6
  service-object tcp destination eq domain
  service-object udp destination eq domain
object-group network DM_INLINE_NETWORK_1
  network-object object dmz-networks
  network-object object internal-network
object-group service DM_INLINE_TCP_5 tcp
  port-object eq www
  port-object eq https
object-group network dmz-wlc-RP-group
  description DMZ Wireless LAN Controllers Redundancy Port Group
  network-object object dmz-wlc-primary-5508-RP
  network-object object dmz-wlc-resilient-5508-RP
object-group service DM_INLINE_UDP_1 udp
  port-object eq 1812
  port-object eq 1813
object-group service DM_INLINE_TCP_6 tcp
  port-object eq www
  port-object eq https
object-group service DM_INLINE_TCP_7 tcp
  port-object eq www
  port-object eq https
object-group service DM_INLINE_SERVICE_7
  service-object tcp destination eq 135
  service-object tcp destination eq 445
  service-object tcp destination eq kerberos
  service-object tcp destination eq ldap
  service-object udp destination eq 389
  service-object udp destination eq ntp
object-group service DM_INLINE_TCP_8 tcp
  port-object eq www
  port-object eq https
access-list global_access remark Permit management protocols from the management DMZ to
the internal network
access-list global_access extended permit object-group DM_INLINE_SERVICE_1 192.168.23.0
255.255.255.0 object internal-network
access-list global_access remark Allow anyone to access the webserver in the DMZ
access-list global_access extended permit tcp any 192.168.16.0 255.255.255.0 object-
group DM_INLINE_TCP_1
access-list global_access extended permit icmp any 192.168.18.0 255.255.255.0

```

```

object-group DM_INLINE_ICMP_1
access-list global_access extended permit object-group DM_INLINE_SERVICE_3 any object
dmz-dmvpn-2
access-list global_access remark Allow traffic to the DMVPN hub routers
access-list global_access extended permit object-group DM_INLINE_SERVICE_2 any object
dmz-dmvpn-1
access-list global_access remark Allow WLC's to communicate with the NTP server locate
din the data center.
access-list global_access extended permit udp object-group dmz-wlc-group object
internal-ntp eq ntp
access-list global_access remark Allow DMZ based WLC's to communicate with the AAA/ACS
Server on the internal network.
access-list global_access extended permit object-group DM_INLINE_SERVICE_4 object-group
dmz-wlc-group object internal-aaa
access-list global_access extended permit tcp object-group dmz-wlc-group any object-
group DM_INLINE_TCP_4
access-list global_access remark Allow DMZ based WLC's to communicate with the internal WLC's
access-list global_access extended permit object-group DM_INLINE_SERVICE_5 object-group
dmz-wlc-group object-group internal-wlc-group
access-list global_access remark Allow DMZ WLC's to obtain IP address via internal DHCP server
access-list global_access extended permit udp object-group dmz-wlc-group object
internal-dhcp eq bootps
access-list global_access remark Allow wireless guest users to obtain an IP address from
the internal DHCP server.
access-list global_access extended permit udp 192.168.28.0 255.255.252.0 object
internal-dhcp eq bootps
access-list global_access remark Allow Guest Wireless Users to resolve DNS names.
access-list global_access extended permit object-group DM_INLINE_SERVICE_6 192.168.28.0
255.255.252.0 object internal-dns
access-list global_access remark Allow wireless guest users access to the DMZ based
webserver, possibly for walled garden access
access-list global_access extended permit tcp 192.168.28.0 255.255.252.0 192.168.16.0
255.255.255.0 object-group DM_INLINE_TCP_5
access-list global_access remark Allow Standby AP-SSO WLC's to communicate to internal
NTP server using RP Port
access-list global_access extended permit udp object-group dmz-wlc-RP-group object
internal-ntp eq ntp
access-list global_access remark Allow ELC to connect to ISE
access-list global_access extended permit udp 192.168.19.0 255.255.255.0 object
internal_ISE-1 object-group DM_INLINE_UDP_1
access-list global_access remark guest client web auth access to ISE
access-list global_access extended permit tcp 192.168.28.0 255.255.252.0 object
internal_ISE-1 eq 8443
access-list global_access remark Deny traffic from the wireless guest network to the
internal and dmz resources
access-list global_access extended deny ip 192.168.28.0 255.255.252.0 object-group
DM_INLINE_NETWORK_1

```

```

access-list global_access remark Allow Wireless DMZ users access to the internet
access-list global_access extended permit ip 192.168.28.0 255.255.252.0 any
access-list global_access remark Exchange to ESA outbound SMTP
access-list global_access extended permit tcp object internal-exchange 192.168.17.0
255.255.255.0 eq smtp
access-list global_access remark Block other outbound SMTP
access-list global_access extended deny tcp object internal-network any4 eq smtp
access-list global_access remark Internet to ESA inbound SMTP
access-list global_access extended permit tcp any4 192.168.17.0 255.255.255.0 eq smtp
access-list global_access remark ESA to Exchange inbound SMTP
access-list global_access extended permit tcp 192.168.17.0 255.255.255.0 object
internal-exchange eq smtp
access-list global_access remark DNS
access-list global_access extended permit udp 192.168.17.0 255.255.255.0 object
internal-dns eq domain
access-list global_access remark NTP
access-list global_access extended permit udp 192.168.17.0 255.255.255.0 object
internal-ntp eq ntp
access-list global_access remark Block other to internal networks
access-list global_access extended deny ip 192.168.17.0 255.255.255.0 object
internal-network
access-list global_access remark ESA to internet outbound SMTP
access-list global_access extended permit tcp 192.168.17.0 255.255.255.0 any4 eq smtp
access-list global_access remark HTTP to Internet
access-list global_access extended permit tcp 192.168.17.0 255.255.255.0 any4 eq www
access-list global_access remark HTTPS to Internet
access-list global_access extended permit tcp 192.168.17.0 255.255.255.0 any4 eq https
access-list global_access remark Deny IP traffic from the DMZ to any other network
access-list global_access extended deny ip object dmz-networks any4
access-list global_access extended deny tcp object internal-network any4 eq telnet
access-list global_access extended permit ip object internal-network any4 log disable
access-list global_access extended permit tcp any6 object dmz-web-net-v6 object-group
DM_INLINE_TCP_2
access-list global_access extended permit tcp any6 object dmz-webserver-ispv6 object-
group DM_INLINE_TCP_3
access-list global_access remark Permit HTTP/HTTPS traffic onto the TMG DMZ
access-list global_access extended permit tcp any4 192.168.22.0 255.255.255.0 object-
group DM_INLINE_TCP_6
access-list global_access remark Permit HTTP/HTTPS from TMG to the internal Exchange Server
access-list global_access extended permit tcp 192.168.22.0 255.255.255.0 object
internal-exchange object-group DM_INLINE_TCP_7 log disable
access-list global_access remark Internal DNS
access-list global_access extended permit udp 192.168.22.0 255.255.255.0 object
internal-dns eq domain
access-list global_access remark TMG Server requires HTTP/HTTPS to get to the internet
for updates.

```

```

access-list global_access extended permit tcp 192.168.22.0 255.255.255.0 any4 object-
group DM_INLINE_TCP_8
access-list global_access extended permit object-group DM_INLINE_SERVICE_7 192.168.22.0
255.255.255.0 object internal-ad
access-list global_mpc extended permit ip any4 any4
access-list RA_PartnerACL remark Partners can access this host only.
access-list RA_PartnerACL standard permit host 10.4.48.35
access-list RA_SplitTunnelACL remark Internal Networks
access-list RA_SplitTunnelACL standard permit 10.4.0.0 255.254.0.0
access-list RA_SplitTunnelACL remark DMZ networks
access-list RA_SplitTunnelACL standard permit 192.168.16.0 255.255.248.0
access-list WCCP_Redirect_List remark Block RFC-1918 10.0.0.0/8
access-list WCCP_Redirect_List extended deny ip any4 10.0.0.0 255.0.0.0
access-list WCCP_Redirect_List remark Block RFC-1918 172.16.0.0/12
access-list WCCP_Redirect_List extended deny ip any4 172.16.0.0 255.240.0.0
access-list WCCP_Redirect_List remark Block RFC-1918 192.168.0.0/16
access-list WCCP_Redirect_List extended deny ip any4 192.168.0.0 255.255.0.0
access-list WCCP_Redirect_List remark Permit all others
access-list WCCP_Redirect_List extended permit ip any4 any4
access-list global_mpc_1 remark Do not match any to internal network
access-list global_mpc_1 extended deny ip any4 object internal-network
access-list global_mpc_1 remark Do not match any to DMZ networks
access-list global_mpc_1 extended deny ip any4 object dmz-networks
access-list global_mpc_1 remark Match HTTP to any other networks
access-list global_mpc_1 extended permit tcp any4 any4 eq www
access-list Block_Trusted_Host remark Trusted Host is 10.4.48.10:443
access-list Block_Trusted_Host extended deny tcp any4 host 10.4.48.10 eq https
access-list Block_Trusted_Host remark Permit all other traffic
access-list Block_Trusted_Host extended permit ip any4 any4
access-list CWS_Tower_Exclude remark ASDM-generated Web Security proxy ACE
access-list CWS_Tower_Exclude extended permit ip object asdm-websecproxy-80-254-158-35 any
access-list CWS_Tower_Exclude remark ASDM-generated Web Security proxy ACE
access-list CWS_Tower_Exclude extended permit ip object asdm-websecproxy-80-254-147-251 any
access-list CWS_Tower_Exclude remark ASDM-generated Web Security proxy ACE
access-list CWS_Tower_Exclude extended permit ip object asdm-websecproxy-80-254-158-155 any
access-list CWS_Tower_Exclude remark ASDM-generated Web Security proxy ACE
access-list CWS_Tower_Exclude extended permit ip object asdm-websecproxy-80-254-158-147 any
access-list CWS_Tower_Exclude remark ASDM-generated Web Security proxy ACE
access-list CWS_Tower_Exclude extended permit ip object asdm-websecproxy-80-254-158-179 any
access-list CWS_Tower_Exclude remark ASDM-generated Web Security proxy ACE
access-list CWS_Tower_Exclude extended permit ip object asdm-websecproxy-80-254-158-187 any
access-list CWS_Tower_Exclude remark ASDM-generated Web Security proxy ACE
access-list CWS_Tower_Exclude extended permit ip object asdm-websecproxy-80-254-158-211 any
access-list CWS_Tower_Exclude remark ASDM-generated Web Security proxy ACE
access-list CWS_Tower_Exclude extended permit ip object asdm-websecproxy-80-254-158-219 any
access-list CWS_Tower_Exclude remark ASDM-generated Web Security proxy ACE
access-list CWS_Tower_Exclude extended permit ip object asdm-websecproxy-80-254-148-194 any

```



```

access-list CWS_Tower_Exclude remark ASDM-generated Web Security proxy ACE
access-list CWS_Tower_Exclude extended permit ip object asdm-websecproxy-202-79-203-98 any
access-list CWS_Tower_Exclude remark ASDM-generated Web Security proxy ACE
access-list CWS_Tower_Exclude extended permit ip object asdm-websecproxy-202-177-218-66 any
!
scansafe general-options
server primary ip 72.37.248.27 port 8080
server backup ip 69.174.58.187 port 8080
retry-count 5
license 6B2F23DCD7704A3947F02CBA6A17BCF2
!
pager lines 24
logging enable
logging buffered informational
logging asdm informational
mtu inside 1500
mtu dmz-web 1500
mtu dmz-email 1500
mtu dmz-dmvpn 1500
mtu dmz-wlc 1500
mtu dmz-tmg 1500
mtu dmz-management 1500
mtu dmz-guests 1500
mtu outside-16 1500
mtu outside-17 1500
mtu IPS-mgmt 1500
failover
failover lan unit primary
failover lan interface failover GigabitEthernet0/2
failover polltime unit msec 200 holdtime msec 800
failover polltime interface msec 500 holdtime 5
failover key FailoverKey
failover replication http
failover link failover GigabitEthernet0/2
failover interface ip failover 10.4.24.33 255.255.255.248 standby 10.4.24.34
monitor-interface inside
monitor-interface dmz-web
monitor-interface dmz-email
monitor-interface dmz-dmvpn
monitor-interface dmz-wlc
monitor-interface dmz-tmg
monitor-interface dmz-management
monitor-interface dmz-guests
monitor-interface outside-16
monitor-interface outside-17
icmp unreachable rate-limit 1 burst-size 1
asdm image disk0:/asdm-702.bin

```

```

no asdm history enable
arp timeout 14400
no arp permit-nonconnected
nat (inside,outside-17) source static any any destination static NETWORK
OBJ 10.4.28.0 22 NETWORK OBJ 10.4.28.0 22 no-proxy-arp route-lookup
nat (inside,outside-16) source static any any destination static NETWORK
OBJ 10.4.28.0 22 NETWORK OBJ 10.4.28.0 22 no-proxy-arp route-lookup
nat (any,any) source static internal-network internal-network destination static 5505-
pool 5505-pool
!
object network internal-network-ISPa
  nat (any,outside-16) dynamic interface
object network internal-network-ISPb
  nat (any,outside-17) dynamic interface
object network dmz-webserver-ISPa
  nat (any,outside-16) static outside-webserver-ISPa
object network dmz-webserver-ISPb
  nat (any,outside-17) static outside-webserver-ISPb
object network dmz-dmvpn-1
  nat (any,any) static outside-dmvpn-ISPa net-to-net
object network dmz-dmvpn-2
  nat (any,any) static outside-dmvpn-ISPb net-to-net
object network outside-IPv6-all
  nat (outside-16,dmz-web) dynamic pat-pool dmz-ipv6-natpool round-robin
object network dmz-guest-network-ISPa
  nat (any,outside-16) dynamic interface
object network dmz-esa370-ISPa
  nat (any,outside-16) static outside-esa-ISPa
object network dmz-esa370-ISPb
  nat (any,outside-17) static outside-esa-ISPb
object network dmz-tmg-ISPa
  nat (dmz-tmg,outside-16) static outside-tmg-ISPa
object network dmz-tmg-ISPb
  nat (dmz-tmg,outside-17) static outside-tmg-ISPb
access-group global_access global
ipv6 route outside-16 ::/0 2001:db8:a::7206
!
router eigrp 100
  no auto-summary
  network 10.4.24.0 255.255.252.0
  network 192.168.16.0 255.255.248.0
  passive-interface default
  no passive-interface inside
  redistribute static
!
route outside-16 0.0.0.0 0.0.0.0 172.16.130.126 1 track 1
route outside-17 0.0.0.0 0.0.0.0 172.17.130.126 50

```

```

route outside-16 172.18.1.1 255.255.255.255 172.16.130.126 1
timeout xlate 3:00:00
timeout pat-xlate 0:00:30
timeout conn 1:00:00 half-closed 0:10:00 udp 0:02:00 icmp 0:00:02
timeout sunrpc 0:10:00 h323 0:05:00 h225 1:00:00 mgcp 0:05:00 mgcp-pat 0:05:00
timeout sip 0:30:00 sip_media 0:02:00 sip-invite 0:03:00 sip-disconnect 0:02:00
timeout sip-provisional-media 0:02:00 uauth 0:05:00 absolute
timeout tcp-proxy-reassembly 0:01:00
timeout floating-conn 0:00:00
dynamic-access-policy-record DfltAccessPolicy
aaa-server AAA-SERVER protocol tacacs+
aaa-server AAA-SERVER (inside) host 10.4.48.15
    key SecretKey
aaa-server AAA-RADIUS protocol radius
aaa-server AAA-RADIUS (inside) host 10.4.48.15
    key SecretKey
    radius-common-pw SecretKey
aaa authentication enable console AAA-SERVER LOCAL
aaa authentication ssh console AAA-SERVER LOCAL
aaa authentication http console AAA-SERVER LOCAL
aaa authentication serial console AAA-SERVER LOCAL
aaa authorization exec authentication-server
http server enable
http 10.4.48.0 255.255.255.0 inside
snmp-server host inside 10.4.48.35 community cisco
no snmp-server location
no snmp-server contact
snmp-server community cisco
snmp-server enable traps snmp authentication linkup linkdown coldstart warmstart
sla monitor 16
    type echo protocol ipIcmpEcho 172.18.1.1 interface outside-16
sla monitor schedule 16 life forever start-time now
crypto ipsec ikev1 transform-set ESP-AES-256-MD5 esp-aes-256 esp-md5-hmac
crypto ipsec ikev1 transform-set ESP-DES-SHA esp-des esp-sha-hmac
crypto ipsec ikev1 transform-set ESP-3DES-SHA esp-3des esp-sha-hmac
crypto ipsec ikev1 transform-set ESP-DES-MD5 esp-des esp-md5-hmac
crypto ipsec ikev1 transform-set ESP-AES-192-MD5 esp-aes-192 esp-md5-hmac
crypto ipsec ikev1 transform-set ESP-3DES-MD5 esp-3des esp-md5-hmac
crypto ipsec ikev1 transform-set ESP-AES-256-SHA esp-aes-256 esp-sha-hmac
crypto ipsec ikev1 transform-set ESP-AES-128-SHA esp-aes esp-sha-hmac
crypto ipsec ikev1 transform-set ESP-AES-192-SHA esp-aes-192 esp-sha-hmac
crypto ipsec ikev1 transform-set ESP-AES-128-MD5 esp-aes esp-md5-hmac
crypto ipsec security-association pmtu-aging infinite
crypto dynamic-map SYSTEM_DEFAULT_CRYPTO_MAP 65535 set ikev1 transform-set ESP-AES-128-
SHA ESP-AES-128-MD5 ESP-AES-192-SHA ESP-AES-192-MD5 ESP-AES-256-SHA ESP-AES-256-MD5
ESP-3DES-SHA ESP-3DES-MD5 ESP-DES-SHA ESP-DES-MD5
crypto dynamic-map SYSTEM_DEFAULT_CRYPTO_MAP 65535 set reverse-route

```

```

crypto map outside-16_map 65535 ipsec-isakmp dynamic SYSTEM_DEFAULT_CRYPTOMAP
crypto map outside-16_map interface outside-16
crypto ca trustpoint _SmartCallHome_ServerCA
    crl configure
crypto ca trustpoint ASDM_TrustPoint0
    enrollment self
    subject-name CN=IE-ASA5545X
    proxy-ldc-issuer
    crl configure
crypto ca trustpoint IE-ASA5545X-Trustpoint
    enrollment self
    subject-name CN=IE-ASA5545X.cisco.local
    keypair IE-ASA5545X-Keypair
    proxy-ldc-issuer
    crl configure
crypto ca trustpoint IE-ASA5545X-FO-Trustpoint
    enrollment self
    subject-name CN=IE-ASA5545X-FO.cisco.local
    keypair IE-ASA5545X-Keypair
    proxy-ldc-issuer
    crl configure
crypto ca trustpool policy
crypto ikev1 enable outside-16
crypto ikev1 policy 10
    authentication crack
    encryption aes-256
    hash sha
    group 2
    lifetime 86400
crypto ikev1 policy 20
    authentication rsa-sig
    encryption aes-256
    hash sha
    group 2
    lifetime 86400
crypto ikev1 policy 30
    authentication pre-share
    encryption aes-256
    hash sha
    group 2
    lifetime 86400
crypto ikev1 policy 40
    authentication crack
    encryption aes-192
    hash sha
    group 2
    lifetime 86400

```

```
crypto ikev1 policy 50
  authentication rsa-sig
  encryption aes-192
  hash sha
  group 2
  lifetime 86400
crypto ikev1 policy 60
  authentication pre-share
  encryption aes-192
  hash sha
  group 2
  lifetime 86400
crypto ikev1 policy 70
  authentication crack
  encryption aes
  hash sha
  group 2
  lifetime 86400
crypto ikev1 policy 80
  authentication rsa-sig
  encryption aes
  hash sha
  group 2
  lifetime 86400
crypto ikev1 policy 90
  authentication pre-share
  encryption aes
  hash sha
  group 2
  lifetime 86400
crypto ikev1 policy 100
  authentication crack
  encryption 3des
  hash sha
  group 2
  lifetime 86400
crypto ikev1 policy 110
  authentication rsa-sig
  encryption 3des
  hash sha
  group 2
  lifetime 86400
crypto ikev1 policy 120
  authentication pre-share
  encryption 3des
  hash sha
  group 2
```

```

lifetime 86400
crypto ikev1 policy 130
authentication crack
encryption des
hash sha
group 2
lifetime 86400
crypto ikev1 policy 140
authentication rsa-sig
encryption des
hash sha
group 2
lifetime 86400
crypto ikev1 policy 150
authentication pre-share
encryption des
hash sha
group 2
lifetime 86400
!
track 1 rtr 16 reachability
telnet timeout 5
ssh 10.4.48.0 255.255.255.0 inside
ssh timeout 5
ssh version 2
console timeout 0
!
tls-proxy maximum-session 1000
!
threat-detection basic-threat
threat-detection statistics access-list
no threat-detection statistics tcp-intercept
wccp web-cache redirect-list WCCP_Redirect_List
wccp 90 redirect-list WCCP_Redirect_List
ntp server 10.4.48.17
ssl encryption aes256-sha1 aes128-sha1 3des-sha1
ssl trust-point IE-ASA5545X-Trustpoint outside-16
ssl trust-point IE-ASA5545X-FO-Trustpoint outside-17
webvpn
enable outside-16
enable outside-17
anyconnect-essentials
anyconnect image disk0:/anyconnect-win-3.1.00495-k9.pkg 1
anyconnect image disk0:/anyconnect-linux-3.1.00495-k9.pkg 2
anyconnect image disk0:/anyconnect-macosx-i386-3.1.00495-k9.pkg 3
anyconnect profiles RA-Profile disk0:/ra-profile.xml
anyconnect profiles RA-WebSecurityProfile disk0:/ra-websecurityprofile.wsp

```

```

anyconnect profiles RA-WebSecurityProfile.wso disk0:/ra-websecurityprofile.wso
anyconnect enable
tunnel-group-list enable
group-policy 5505Group internal
group-policy 5505Group attributes
wins-server none
dns-server none
vpn-tunnel-protocol ikev1
password-storage disable
split-tunnel-policy tunnelall
default-domain value cisco.local
secure-unit-authentication enable
nem enable
group-policy GroupPolicy_Employee internal
group-policy GroupPolicy_Employee attributes
  banner value Group "vpn-employee" allows for unrestricted access with a tunnel all policy.
  vpn-filter value Block_Trusted_Host
  split-tunnel-policy excludespecified
  split-tunnel-network-list value CWS_Tower_Exclude
webvpn
  anyconnect modules value websecurity
  anyconnect profiles value RA-Profile type user
  anyconnect profiles value RA-WebSecurityProfile.wso type websecurity
  always-on-vpn profile-setting
group-policy GroupPolicy_AnyConnect internal
group-policy GroupPolicy_AnyConnect attributes
wins-server none
dns-server value 10.4.48.10
vpn-tunnel-protocol ssl-client
default-domain value cisco.local
group-policy GroupPolicy_Partner internal
group-policy GroupPolicy_Partner attributes
  banner value Group "vpn-partner" allows for access control list (ACL) restricted access
  with a tunnel all policy.
  vpn-filter value RA_PartnerACL
webvpn
  anyconnect profiles value RA-Profile type user
group-policy GroupPolicy_Administrator internal
group-policy GroupPolicy_Administrator attributes
  banner value Group "vpn-administrator" allows for unrestricted access with a split
  tunnel policy.
  split-tunnel-policy tunnelspecified
  split-tunnel-network-list value RA_SplitTunnelACL
webvpn
  anyconnect profiles value RA-Profile type user
username admin password w2Y.6Op4j7clVDk2 encrypted privilege 15
tunnel-group AnyConnect type remote-access

```



```

tunnel-group AnyConnect general-attributes
  address-pool RA-pool
  authentication-server-group AAA-RADIUS
  default-group-policy GroupPolicy_AnyConnect
  password-management
tunnel-group AnyConnect webvpn-attributes
  group-alias AnyConnect enable
  group-url https://172.16.130.124/AnyConnect enable
  group-url https://172.17.130.124/AnyConnect enable
tunnel-group Teleworker5505 type remote-access
tunnel-group Teleworker5505 general-attributes
  authentication-server-group AAA-RADIUS
  default-group-policy 5505Group
tunnel-group Teleworker5505 ipsec-attributes
  ikev1 pre-shared-key cisco123
!
class-map global-class
  match access-list global_mpc
class-map cws-http-class
  description Class to match HTTP traffic for Cloud Web Security
  match access-list global_mpc_1
class-map inspection_default
  match default-inspection-traffic
!
!
policy-map type inspect dns preset_dns_map
  parameters
    message-length maximum client auto
    message-length maximum 512
policy-map type inspect scansafe CWS-HTTP-80
  description Cloud Web Security TCP-80
  parameters
    default user cvd-default
    http
policy-map global_policy
  class inspection_default
    inspect dns preset_dns_map
    inspect ftp
    inspect h323 h225
    inspect h323 ras
    inspect ip-options
    inspect netbios
    inspect rsh
    inspect rtsp
    inspect skinny
    inspect esmtp
    inspect sqlnet

```

```
inspect sunrpc
inspect tftp
inspect sip
inspect xdmcp
inspect icmp
class global-class
  ips inline fail-close
class cws-http-class
  inspect scansafe CWS-HTTP-80 fail-open
!
service-policy global_policy global
prompt hostname context
no call-home reporting anonymous
call-home
  profile CiscoTAC-1
  no active
  destination address http https://tools.cisco.com/its/service/oddce/services/DDCEService
  destination address email callhome@cisco.com
  destination transport-method http
  subscribe-to-alert-group diagnostic
  subscribe-to-alert-group environment
  subscribe-to-alert-group inventory periodic monthly 2
  subscribe-to-alert-group configuration periodic monthly 2
  subscribe-to-alert-group telemetry periodic daily
hpm topN enable
: end
```

Appendix C: Provisioning Email Example

From: ScanSafe Provisioning [mailto:provisioning@scansafe.net]
Subject: Provisioning Notification: Customer X / PO Ref:XXXXXXXX

On Day-Month-Year we completed the provisioning of the ScanSafe Web Security services for Customer X in accordance with the order details below:

Services:	Subscription Seats and Services
Term:	Subscription Months
Registered IP Addresses:	-None configured yet-
Domains:	-None configured yet-

The service is now available and you should make the necessary configuration changes described below to use the service. Please configure your system so that external Web traffic is sent via ScanSafe, using the explicit proxy setting below:

Primary Web Services Proxy Address:	proxyXXXX.scansafe.net
Web Services Proxy port:	8080
Secondary Web Services Proxy Address:	proxyXXXX.scansafe.net
Web Services Proxy port:	8080

The exact configuration changes required will vary depending in your specific existing infrastructure.

To log in to the service configuration Web portal and administer the service, please visit <https://scancenter.scansafe.com/portal/admin/login.jsp> and enter your email and password details below:

Email:	contact@CustomerX.com
Password :	-Not Shown-
Company ID:	XXXXXXXXXX

As part of our ongoing commitment to quality and service, a member of the ScanSafe Customer Services team will be in touch with you to ensure that the service is functioning according to your expectations.

If you require any assistance or experience any problems with the service, please do not hesitate to contact our support team.

We appreciate your choosing ScanSafe to provide Web security and look forward to a successful working partnership with you.

Customer Services

EMEA +44 (0) 207 034 9400

US + (1) 877 472 2680

support@scansafe.com

This email and any attachments are strictly confidential and intended for the addressee(s) only. If this email has been sent to you in error, please let us know by forwarding it to us at support@scansafe.com.

Neither ScanSafe nor its directors, officers or employees accepts any liability for the accuracy or completeness of this email. Unless expressly stated to the contrary, no contracts may be concluded on behalf of ScanSafe by means of e-mail communication.

Feedback

Please use the [feedback form](#) to send comments and suggestions about this guide.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

ALL DESIGNS, SPECIFICATIONS, STATEMENTS, INFORMATION, AND RECOMMENDATIONS (COLLECTIVELY, "DESIGNS") IN THIS MANUAL ARE PRESENTED "AS IS," WITH ALL FAULTS. CISCO AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE. IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THE DESIGNS, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE DESIGNS ARE SUBJECT TO CHANGE WITHOUT NOTICE. USERS ARE SOLELY RESPONSIBLE FOR THEIR APPLICATION OF THE DESIGNS. THE DESIGNS DO NOT CONSTITUTE THE TECHNICAL OR OTHER PROFESSIONAL ADVICE OF CISCO, ITS SUPPLIERS OR PARTNERS. USERS SHOULD CONSULT THEIR OWN TECHNICAL ADVISORS BEFORE IMPLEMENTING THE DESIGNS. RESULTS MAY VARY DEPENDING ON FACTORS NOT TESTED BY CISCO.

Any Internet Protocol (IP) addresses used in this document are not intended to be actual addresses. Any examples, command display output, and figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses in illustrative content is unintentional and coincidental.

© 2013 Cisco Systems, Inc. All rights reserved.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)