



Cloud Ready Infrastructure Smart Solutions Kits Accelerate Design and Deployment of Unified DC

March 14, 2013

CCDE, CCENT, CCSI, Cisco Eos, Cisco Explorer, Cisco HealthPresence, Cisco IronPort, the Cisco logo, Cisco Nurse Connect, Cisco Pulse, Cisco SensorBase, Cisco StackPower, Cisco StadiumVision, Cisco TelePresence, Cisco TrustSec, Cisco Unified Computing System, Cisco WebEx, DCE, Flip Channels, Flip for Good, Flip Mino, Flipshare (Design), Flip Ultra, Flip Video, Flip Video (Design), Instant Broadband, and Welcome to the Human Network are trademarks; Changing the Way We Work, Live, Play, and Learn, Cisco Capital, Cisco Capital (Design), Cisco:Financed (Stylized), Cisco Store, Flip Gift Card, and One Million Acts of Green are service marks; and Access Registrar, Aironet, AllTouch, AsyncOS, Bringing the Meeting To You, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, CCVP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Lumin, Cisco Nexus, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Collaboration Without Limitation, Continuum, EtherFast, EtherSwitch, Event Center, Explorer, Follow Me Browsing, GainMaker, iLYNX, IOS, iPhone, IronPort, the IronPort logo, Laser Link, LightStream, Linksys, MeetingPlace, MeetingPlace Chime Sound, MGX, Networkers, Networking Academy, PCNow, PIX, PowerKEY, PowerPanels, PowerTV, PowerTV (Design), PowerVu, Prisma, ProConnect, ROSA, SenderBase, SMARTnet, Spectrum Expert, StackWise, WebEx, and the WebEx logo are registered trademarks of Cisco and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1002R)

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Cloud Ready Infrastructure Smart Solutions Kits Accelerate Design and Deployment of Unified DC
© 2013 Cisco Systems, Inc. All rights reserved.




CRI Smart Solutions Kits Accelerate Design and Deployment of Unified DC

Cloud Ready Infrastructure (CRI) Smart Solutions Kits are a prescriptive, modular, and flexible portfolio of building blocks for designing and deploying [Cisco's Unified Data Center Networking](#) platform based on the Cisco Virtualized Multiservice Data Center (VMDC) architecture.

Cisco® [Virtualized Multiservice Data Center](#) (VMDC) architecture is a validated reference architecture for both Cloud and traditional data center environments. The VMDC architecture shown in [Figure 1](#) uses modular, flexible, validated designs in an integrated approach that adapts easily to address enterprise, service provider, or public sector needs. VMDC brings together the three components of the Unified Data Center: Unified Management, Unified Fabric, and Unified Computing. Cloud Ready Infrastructure Smart Solutions Kits focus on simplifying ordering and deploying the Unified Data Center Networking module of the architecture.

Figure 1 VMDC Reference Architecture

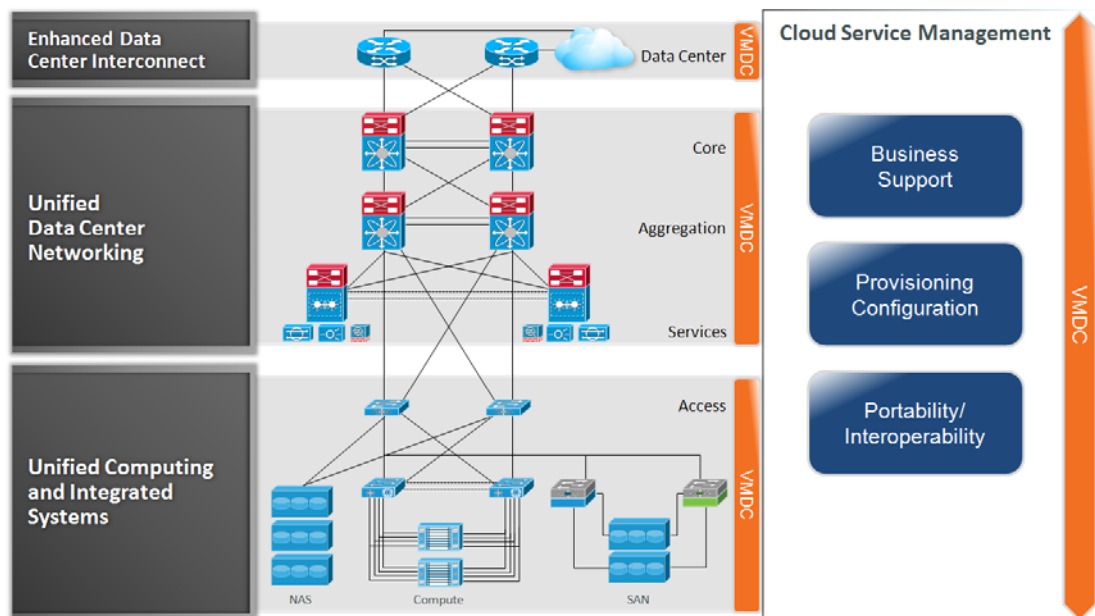

Cloud Ready Infrastructure Smart Solutions Kits are pre-defined and pre-validated baseline bill of materials (BOM) sized for different environments to enable functionality for the Unified Data Center Networking layer of VMDC. This layer provides secure separation and access to shared network services for the applications and workflows moving through the virtualized data center. The baseline is a suggested starting point of products and features that can be readily adapted to meet each business's unique needs.


Cloud Ready Infrastructure Smart Solutions Kits complement VMDC Cisco Validated Design (CVD) documentation. The CVDs detail validated architecture features and benefits, along with guidance on how to integrate and configure the products and technologies to provide the end-to-end system. The CRI Smart Solutions Kits provide product BOMs and licenses necessary to implement the system described in the CVDs.

In the future, Cloud Services Management kits will be made available to simplify the ordering and deploying the Cloud Services Management Layer. The kits will be based on Cisco Validated Designs, which pre-validate Cloud Ready Infrastructure with Cloud Service Management solutions such as Cisco Intelligent Automation for Cloud.

VMDC Topology

As shown in [Figure 2](#), the CRI Smart Solutions Kit describes the baseline products for the core/aggregation layer and services layer of the VMDC reference architecture. These two layers, along with integrated compute, storage, and network systems (ICS) (compute + storage + networking) form the basic data center building blocks called Points of Delivery (POD). The POD serves as a blueprint for incremental build-out of the Cloud data center in a structured fashion. When resource utilization within a POD reaches a pre-determined threshold (i.e., 70-80%), the idea is that one simply deploys a new POD. From a service fulfillment and orchestration perspective, a POD represents a discrete resource management domain.

Figure 2 VMDC System Overview

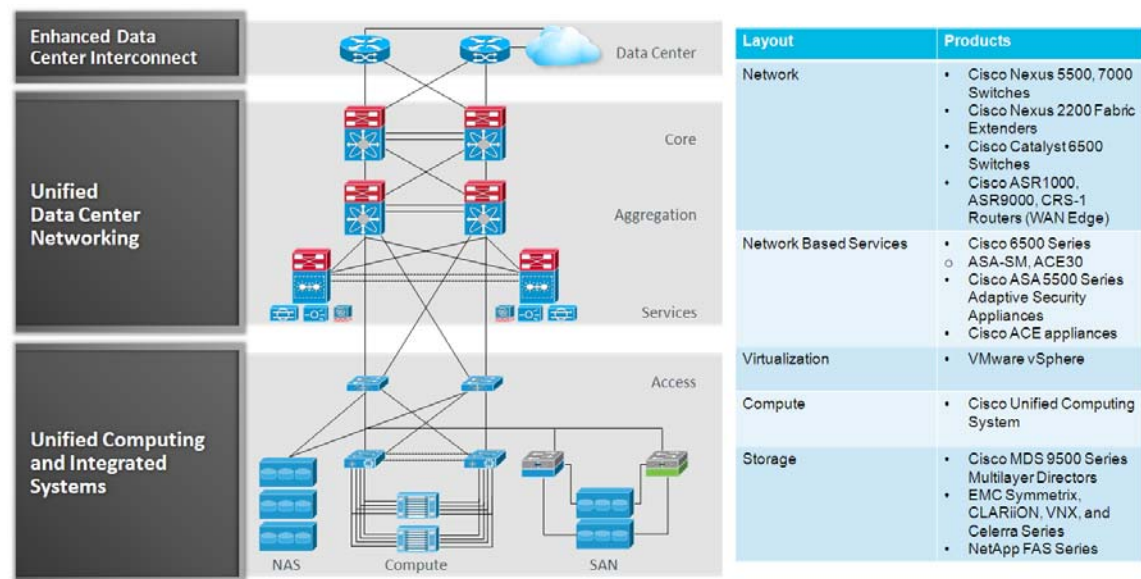


CRI Kits—Cloud Ready Network Infrastructure for ICS Environments

The CRI kits are ideal for new and existing FlexPod, Vblock, and other integrated compute, storage, and networks stacks (ICS) systems. The CRI kits are easily integrated with these converged environments by connecting the northbound links of the ICS to CRI kit. Figure 3 shows how a typical ICS connects to the aggregation/access layer of the CRI kit.

The CRI kit extends the secure workload separation provided by the ICS throughout the rest of the data center network using VMDC network containers.

The ICS layer is described in detail in validated ICS systems such as the FlexPod¹ and Vblock².

Figure 3 CRI and ICS

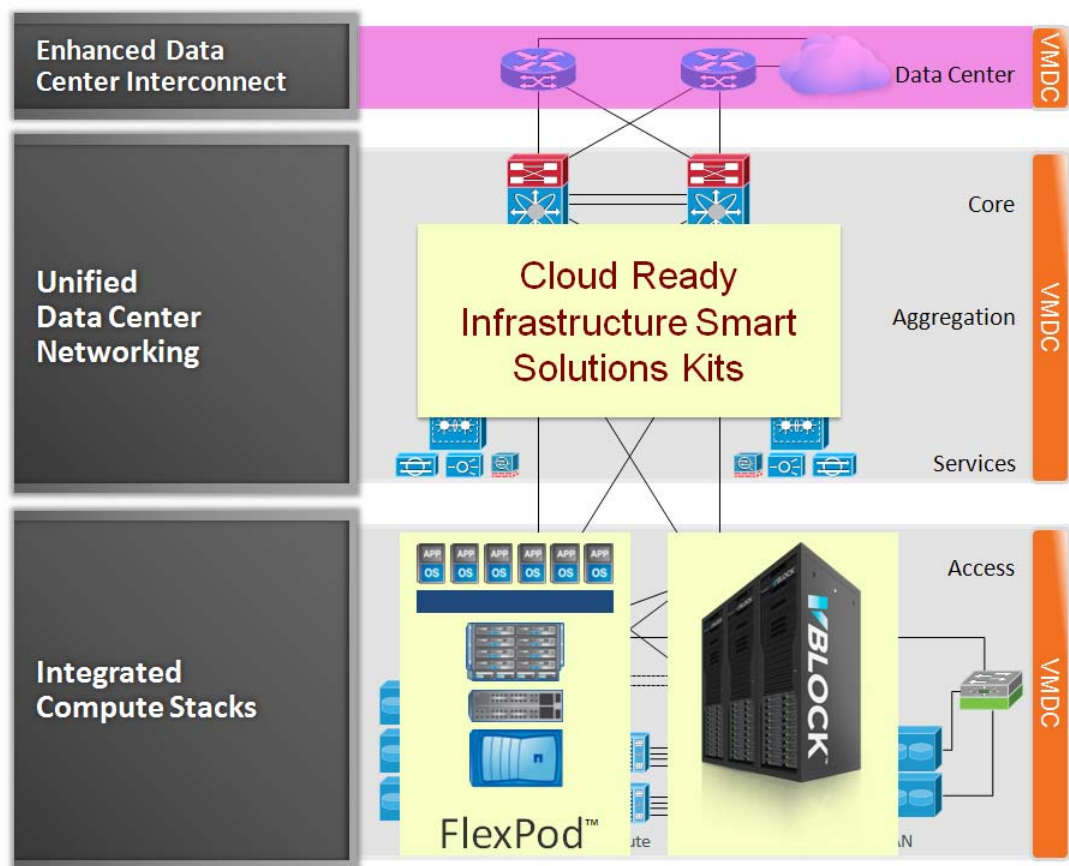

1. <http://www.cisco.com/go/flexpod>

2. <http://www.cisco.com/go/vblock>

Cloud Ready Infrastructure Smart Solutions Kits

The Cloud Ready Infrastructure Smart Solutions Kits portfolio is the pre-defined, pre-validated baseline BOMs that follow the Virtualized Multiservice Reference Architecture.

Each kit defines the VMDC POD components and sized by the number of UCS chassis supported by each POD. The VMDC 2.x design guides recommend four 10GE links between each aggregation layer switch and the integrated compute, storage, and storage systems based on Cisco UCS (two links to each N5K of the ICS), based on a 4:1 network oversubscription, along with existing best practices described. From the UCS chassis perspective, eight 10G links, 4 to each Fabric Interconnect, exist.

The number of UCS chassis can be used to derive other use case-specific sizing metrics, such as the number of virtual machines for Infrastructure as a Service.

These baseline bills of materials are intended to be a starting point and intended to be adapted to each customer's unique needs. Detailed scalability considerations are described in the VMDC 2.3 Design Guide and include factors such as tenant numbers, bandwidth counts, services throughput, nic/mac counts, VLAN counts, and vlan-port count.

[Table 1](#) summarizes the CRI kits for VMDC 2.x. The kits are a list of product IDs that are available in pre-populated Cisco Commerce Workspace (CCW) templates. The table headings are used to identify the kits in this document (e.g., CRI-SO-M). These heading are not product IDs since the kits are not bundles that are orderable with a single SKU.

Table 1 CRI Kits

	CRI-SO-S	CRI-PO-S	CRI-PO-M	CRI-PO-L
Aggregation Switch	Nexus 5548-UP	Nexus 7004	Nexus 7009	Nexus 7018
Network Services ¹	ASA5555-X ASA5555-X ACE-4710	ASA5555-X ASA5585-X ACE-4710	Catalyst 6500 DSN + ASA5555-X + ASA-SM + ACE30	Catalyst 6500 DSN + ASA5585-X + ASA-SM + ACE30
Number of UCS B-Series Chassis Supported ²	12	24	48	64

1. Load Balancing is an essential function for many of the VMDC container models. Cisco ACE is listed as an example; however, every customer situation is unique, and a L4-L7 services strategy should be based on current needs as well as planning for the future as your network transitions to virtualization and cloud.
2. The number of UCS chassis listed is only a baseline example and assumes fully populated UCS B-Series Chassis with B200 blade servers.

[Figure 4](#) depicts the products used in the CRI smart solutions kits. This is a simplified view and does not show the redundant pair.

Details of each BOMs are included below. The product IDs (PIDs) and quantity of each product are provided.

- [CRI-SO-S BOMs, page -5](#)
- [CRI-PO-S BOMs, page -6](#)
- [CRI-PO-M BOMs, page -9](#)
- [CRI-PO-L BOMs, page -11](#)

Figure 4 Cloud Ready Network Infrastructure Smart Solutions Kits

CRI-SO-S BOMs

This kit is based on the Nexus 5000 series as the aggregation node and appliances for network services as listed in [Table 1](#) and [Figure 1](#).

The positioning and selection criteria between a Nexus 5000 and Nexus 7000 aggregation layer device will be described in the VMDC 2.3 CVD.

Figure 1 CRI-SO-S Aggregation Layer with Nexus 5548

Item Name	Description	Quantity
N5K-C5548UP-FA	Nexus 5548 UP Chassis 32 10GbE Ports 2 PS 2 Fans	2
N55-BAS1K9	Layer 3 Base License for Nexus 5500 Platform	2
N55-D160L3-V2	Nexus 5548 Layer 3 Daughter Card Version 2	2
SFP-10G-SR	10GBASE-SR SFP Module	16
N55-LAN1K9	Layer 3 License for Nexus 5500 Platform	2
N5KUK9-521N1.1B	Nexus 5000 Base OS Software Rel 5.2(1)N1(1b)	2
CAB-9K12A-NA	Power Cord 125VAC 13A NEMA 5-15 Plug North America	4
N5548P-FAN	Nexus 5548P and 5548UP Fan Module Front to Back Airflow	4
N5548-ACC-KIT	Nexus 5548 Chassis Accessory Kit	2
N55-M-BLNK	Nexus 5500 Module Blank Cover	2
N55-PAC-750W	Nexus 5500 PS 750W Front to Back Airflow(Port-Side Outlet)	4

Figure 2 CRI-SO-S Network Service Appliances

Item Name	Description	Quantity
ASA5555VPN-EM5KK9	ASA 5555-X w/5000 AnyConnect Essentials and Mobile	2
CAB-AC	AC Power Cord (North America) C13 NEMA 5-15P 2.1m	2
ASA-PWR-AC	ASA 5545-X/5555-X AC Power Supply	2
ASA-AC-M-5555	AnyConnect Mobile - ASA 5555-X (req. Essentials or Premium)	2
ASA-VPN-CLNT-K9	Cisco VPN Client Software (Windows Solaris Linux Mac)	2
ASA-AC-E-5555	AnyConnect Essentials VPN License - ASA 5555-X (5000 Users)	2
ASA-PWR-AC	ASA 5545-X/5555-X AC Power Supply	2
ASA5500-ENCR-K9	ASA 5500 Strong Encryption License (3DES/AES)	2
ASA-ANYCONN-CSD-K9	ASA 5500 AnyConnect Client + Cisco Security Desktop Software	2
CAB-AC	AC Power Cord (North America) C13 NEMA 5-15P 2.1m	2
SF-ASA-8.6-K8	ASA 5500 Series Software Ver. 8.6 for ASA 5512X--5555X DES	2
ACE-4710-01-K9	ACE 4710 Hardware-1Gbps-7500SSL-1GComp-20VC	2
CAB-AC	AC Power Cord (North America) C13 NEMA 5-15P 2.1m	2
ACE-AP-SW-5.1	ACE Appliance SW 5.1	2
ACE-4710-01-LIC	ACE 4710 1Gig License Bundle	2
ASA5555-K9	ASA 5555-X with SW 8GE Data 1GE Mgmt AC 3DES/AES	2
ASA-PWR-AC	ASA 5545-X/5555-X AC Power Supply	2
CAB-AC	AC Power Cord (North America) C13 NEMA 5-15P 2.1m	2
ASA5500-SC-5	ASA 5500 5 Security Contexts License	2
SF-ASA-8.6-K8	ASA 5500 Series Software Ver. 8.6 for ASA 5512X--5555X DES	2
ASA-VPN-CLNT-K9	Cisco VPN Client Software (Windows Solaris Linux Mac)	2
ASA-PWR-AC	ASA 5545-X/5555-X AC Power Supply	2
ASA5500-ENCR-K9	ASA 5500 Strong Encryption License (3DES/AES)	2
ASA-ANYCONN-CSD-K9	ASA 5500 AnyConnect Client + Cisco Security Desktop Software	2
CAB-AC	AC Power Cord (North America) C13 NEMA 5-15P 2.1m	2

CRI-PO-S BOMs

This kit is based on the Nexus 7004 as the aggregation node and appliances for network services. [Table 3](#) shows key differences between the two versions defined:

1. Nexus 7004 (redundant supervisors and line cards) for production environments
2. Nexus 7004 (non-redundant Supervisors and line cards) for price-sensitive markets and non-production environments (e.g., Proof of Concept). This can be easily upgraded to the fully redundant version. Each version utilizes the same network services devices.

**Note**

Nexus 7004 aggregation nodes are deployed in pairs. The Nexus 7000 scales up through additional line cards.

Table 3 Two Types of CRI-PO-S

Component	Redundant Sup and LC	Single Sup and LC
Supervisor (Sup 2)	Qty = 2	Qty = 1
Line card (N7K-F248XP-25)	Qty = 2	Qty = 1

Table 4 shows the BOM for CRI-PO-S with redundant supervisor and line card.

Table 4 CRI-PO-S Aggregation Layer with Redundant Supervisor and Line Card

Item Name	Description	Quantity
N7K-C7004-S2-R	Nexus 7004 Bundle (Chassis 2xSUP2) No Power Supplies	2
N7K-F248XP-25	Nexus 7000 F2-Series 48 Port 10GbE (req. SFP+)	2
SFP-10G-SR	10GBASE-SR SFP Module	20
GLC-T	1000BASE-T SFP	4
N7KS2K9-61	Cisco NX-OS Release 6.1 for SUP2	2
CAB-7513AC	AC POWER CORD NORTH AMERICA (110V)	8
N7K-LAN1K9	Nexus 7000 LAN Enterprise License (L3 protocols)	2
N7K-SUP2	Nexus 7000 - Supervisor 2 Includes External 8GB USB Flash	2
N7K-USB-8GB	Nexus 7K USB Flash Memory - 8GB (Log Flash)	2
N7K-SUP2	Nexus 7000 - Supervisor 2 Includes External 8GB USB Flash	2
N7K-USB-8GB	Nexus 7K USB Flash Memory - 8GB (Log Flash)	2
N7K-AC-3KW	Nexus 7000 - 3.0KW AC Power Supply Module (Cable Included)	8
N7K-F248XP-25	Nexus 7000 F2-Series 48 Port 10GbE (req. SFP+)	2
SFP-10G-SR	10GBASE-SR SFP Module	20
GLC-T	1000BASE-T SFP	4

Table 5 shows the BOM for CRI-PO-S with single supervisor and line card.

Table 5 CRI-PO-S Aggregation Layer with Single Supervisor and Line Card

Item Name	Description	Quantity
N7K-C7004-S2	Nexus 7004 Bundle (Chassis 1xSUP2) No Power Supplies	2
N7KS2K9-61	Cisco NX-OS Release 6.1 for SUP2	2
N7K-LAN1K9	Nexus 7000 LAN Enterprise License (L3 protocols)	2
N7K-SUP2	Nexus 7000-Supervisor 2 Includes External 8GB USB Flash	2
N7K-USB-8GB	Nexus 7K USB Flash Memory - 8GB (Log Flash)	2
N7K-F248XP-25	Nexus 7000 F2-Series 48 Port 10GbE (req. SFP+)	2

Table 5 CRI-POS-S Aggregation Layer with Single Supervisor and Line Card *(continued)*

GLC-T	1000BASE-T SFP	4
SFP-10G-SR	10GBASE-SR SFP Module	20
N7K-AC-3KW	Nexus 7000-3.0KW AC Power Supply Module (Cable Included)	8
CAB-7513AC	AC POWER CORD NORTH AMERICA (110V)	8

These are the recommended products for network services (choose different platforms or licensing based on services throughput, contexts and features needed for deployment).

Table 6 shows the recommended devices for providing network services for the CRI-PO-S.

Table 6 CRI-PO-S Network Service Appliances

Item Name	Description	Quantity
ASA5585-S40-K9	ASA 5585-X Chas with SSP40 6GE 4SFP+ 2GE Mgt 1 AC 3DES/AES	2
CAB-AC-2500W-US1	Power Cord 250Vac 16A straight blade NEMA 6-20 plug US	4
SFP-10G-SR	10GBASE-SR SFP Module	8
ASA5585-PWR-AC	ASA 5585-X AC Power Supply	2
ASA5500-SC-5	ASA 5500 5 Security Contexts License	2
ASA5585-SEC-PL	ASA 5585-X Security Plus License (Enables 10G SFP+ Ports)	2
ASA5585-BLANK-HD	ASA 5585-X Hard Drive Blank Slot Cover	4
ASA5585-BLANK-F	ASA 5585-X Full Width Blank Slot Cover	2
ASA-SSP-40-INC	ASA 5585-X Security Services Processor-40 with 6GE 4SFP+	2
ASA5500-ENCR-K9	ASA 5500 Strong Encryption License (3DES/AES)	2
ASA5585-PWR-AC	ASA 5585-X AC Power Supply	2
ASA-ANYCONN-CSD-K9	ASA 5500 AnyConnect Client + Cisco Security Desktop Software	2
SF-ASA558X-8.4-K8	Software release ASA 8.4	2
ASA-VPN-CLNT-K9	Cisco VPN Client Software (Windows Solaris Linux Mac)	2
ASA5555VPN-EM5KK9	ASA 5555-X w/5000 AnyConnect Essentials and Mobile	2
CAB-AC	AC Power Cord (North America) C13 NEMA 5-15P 2.1m	2
ASA-AC-E-5555	AnyConnect Essentials VPN License - ASA 5555-X (5000 Users)	2
ASA-PWR-AC	ASA 5545-X/5555-X AC Power Supply	2
ASA-AC-M-5555	AnyConnect Mobile - ASA 5555-X (req. Essentials or Premium)	2
SF-ASA-8.6-K8	ASA 5500 Series Software Ver. 8.6 for ASA 5512X--5555X DES	2
ASA-VPN-CLNT-K9	Cisco VPN Client Software (Windows Solaris Linux Mac)	2
ASA-PWR-AC	ASA 5545-X/5555-X AC Power Supply	2
ASA5500-ENCR-K9	ASA 5500 Strong Encryption License (3DES/AES)	2
ASA-ANYCONN-CSD-K9	ASA 5500 AnyConnect Client + Cisco Security Desktop Software	2
CAB-AC	AC Power Cord (North America) C13 NEMA 5-15P 2.1m	2

Table 6 CRI-PO-S Network Service Appliances (*continued*)

Item Name	Description	Quantity
ACE-4710-01-K9	ACE 4710 Hardware-1Gbps-7500SSL-1GComp-20VC	2
CAB-AC	AC Power Cord (North America) C13 NEMA 5-15P 2.1m	2
ACE-AP-SW-5.1	ACE Appliance SW 5.1	2
ACE-4710-01-LIC	ACE 4710 1Gig License Bundle	2

CRI-PO-M BOMs

This kit is based on the Nexus 7009 as the aggregation node and the Data Center Services Node and appliances for network services.

The Nexus 7009 aggregation nodes are deployed in pairs as listed in [Table 7](#). The Nexus 7000 scales up through additional line cards. Each Nexus 7009 has:

- Dual Sup2
- Dual M2 Series Line Cards

The Data Center Services Nodes are deployed in pairs as listed in [Table 8](#). Each DSN has:

- Dual VS-Sup720
- Dual 6708 Line Cards
- ACE30 for load balancing
- ASA-SM for firewall

If price is an issue, then a single VS-Sup720 configuration can be used; however, system redundancy is reduced.

The DSN scales up through additional feature licenses on the service modules and by adding additional service modules. For example, the ASA-SM is specified below with 20 security context licenses, which supports up to 20 tenants. The ASA-SM can be scaled up to support 250 tenants by upgrading the virtual context licenses (e.g., ASA5500-SC-20).

A pair of ASA5555-X is the recommended starting point as listed in [Table 9](#). If additional performance is required, then the ASA5585-X (with SSP20 or higher) should be considered. Choose different platforms or licensing based on services throughput, contexts, and features needed for deployment.

Table 7 CRI-PO-M Aggregation Layer with Cisco Nexus 7009

Item Name	Description	Quantity
N7K-C7009-BUN2-P2	Nexus 7009 Promo Bundle (Chassis SUP2 (3)FAB2)	2
N7K-M224XP-23L	Nexus 7000 M2-Series 24 Port 10GE with XL Option (req. SFP+)	2
SFP-10G-SR	10GBASE-SR SFP Module	20
N7K-M224XP-23L	Nexus 7000 M2-Series 24 Port 10GE with XL Option (req. SFP+)	2
SFP-10G-SR	10GBASE-SR SFP Module	20
N7K-C7009-FAB-2	Nexus 7000 - 9 Slot Chassis - 110Gbps/Slot Fabric Module	6
N7K-AC-6.0KW	Nexus 7000 - 6.0KW AC Power Supply Module	4
CAB-AC-C6K-TWLK	Power Cord 250Vac 16A twist lock NEMA L6-20 plug US	8

Table 7 *CRI-PO-M Aggregation Layer with Cisco Nexus 7009 (continued)*

Item Name	Description	Quantity
N7KS2K9-61	Cisco NX-OS Release 6.1 for SUP2	2
N7K-LAN1K9	Nexus 7000 LAN Enterprise License (L3 protocols)	2
N7K-SUP2	Nexus 7000 - Supervisor 2 Includes External 8GB USB Flash	2
N7K-USB-8GB	Nexus 7K USB Flash Memory - 8GB (Log Flash)	2
N7K-SUP2	Nexus 7000 - Supervisor 2 Includes External 8GB USB Flash	2
N7K-USB-8GB	Nexus 7K USB Flash Memory - 8GB (Log Flash)	2

Table 8 *CRI-PO-M: Data Center Services Node for Network Services*

Item Name	Description	Quantity
WS-C6509-E	Catalyst 6500 Enhanced 9-slot chassis 15RU no PS no Fan Tray	2
VS-S720-10G-3C	Cat 6500 Supervisor 720 with 2 x 10GbE and 3x1GE MSFC3 PFC3C	2
BF-S720-64MB-RP	Bootflash for SUP720-64MB-RP	2
VS-F6K-MSFC3	Catalyst 6500 Multilayer Switch Feature Card (MSFC) III	2
VS-F6K-PFC3C	Catalyst 6500 Sup 720-10G Policy Feature Card 3C	2
VS-S720-10G	Catalyst 6500 Supervisor 720 with 2 10GbE ports	2
CF-ADAPTER-SP	SP adapter for SUP720 and SUP720-10G	2
MEM-C6K-CPTFL1GB	Catalyst 6500 Compact Flash Memory 1GB	2
X2-10GB-SR	10GBASE-SR X2 Module	4
WS-X6708-10G-3C	C6K 8 port 10 Gigabit Ethernet module with DFC3C (req. X2)	2
WS-X6708-10GE	Cat6500 8 port 10 Gigabit Ethernet module (req. DFC and X2)	2
WS-F6700-DFC3C	Catalyst 6500 Dist Fwd Card for WS-X67xx modules	2
X2-10GB-SR	10GBASE-SR X2 Module	8
WS-X6708-10G-3C	C6K 8 port 10 Gigabit Ethernet module with DFC3C (req. X2)	2
WS-X6708-10GE	Cat6500 8 port 10 Gigabit Ethernet module (req. DFC and X2)	2
WS-F6700-DFC3C	Catalyst 6500 Dist Fwd Card for WS-X67xx modules	2
X2-10GB-SR	10GBASE-SR X2 Module	8
ACE30-MOD-K9	Application Control Engine 30 Hardware	2
SC6K-A51-ACE	ACE30 module Software Release 5(1)	2
ACE30-MOD-04-K9	ACE30 Module with 4G 4G Comp 30K SSL TPS and 250VC	2
WS-SVC-ASA-SM1-K9	ASA Services Module for Catalyst 6500-E 3DES/AES	2
SF-ASASM-8.5-K8	ASA Software 8.5 for Catalyst 6500-E ASASM 2 free VFW	2
ASA5500-ENCR-K9	ASA 5500 Strong Encryption License (3DES/AES)	2
MEM-C6K-APP-24GB	Cat6500 24GB Service Module Memory	2
SF-ASASM-ASDM-6.5	ASDM Software 6.5 for Catalyst 6500-E ASASM	2
WS-SVC-ASA-SM1	Base ASA Services Module PID for K8/K9	2

Table 8 *CRI-PO-M: Data Center Services Node for Network Services (continued)*

Item Name	Description	Quantity
ASA5500-SC-20	ASA 5500 20 Security Contexts License	2
WS-CAC-6000W	Cat6500 6000W AC Power Supply	4
CAB-C19-CBN	Cabinet Jumper Power Cord 250 VAC 16A C20-C19 Connectors	8
WS-C6509-E-FAN	Catalyst 6509-E Chassis Fan Tray	2
VS-S720-10G-3C	Cat 6500 Supervisor 720 with 2 x 10GbE and 3x1GE MSFC3 PFC3C	2
BF-S720-64MB-RP	Bootflash for SUP720-64MB-RP	2
VS-F6K-MSFC3	Catalyst 6500 Multilayer Switch Feature Card (MSFC) III	2
VS-F6K-PFC3C	Catalyst 6500 Sup 720-10G Policy Feature Card 3C	2
VS-S720-10G	Catalyst 6500 Supervisor 720 with 2 10GbE ports	2
SV33AIK9-12233SXJ	Cisco CAT6000-VSS720 IOS ADVANCED IP SERVICES SSH	2
CF-ADAPTER-SP	SP adapter for SUP720 and SUP720-10G	2
MEM-C6K-CPTFL1GB	Catalyst 6500 Compact Flash Memory 1GB	2
X2-10GB-SR	10GBASE-SR X2 Module	4

Table 9 *CRI-PO-M: VPN Services*

Item Name	Description	Quantity
ASA5555VPN-EM5KK9	ASA 5555-X w/5000 AnyConnect Essentials and Mobile	2
ASA-AC-E-5555	AnyConnect Essentials VPN License - ASA 5555-X (5000 Users)	2
ASA-AC-M-5555	AnyConnect Mobile - ASA 5555-X (req. Essentials or Premium)	2
SF-ASA-8.6-K8	ASA 5500 Series Software Ver. 8.6 for ASA 5512X--5555X DES	2
ASA-VPN-CLNT-K9	Cisco VPN Client Software (Windows Solaris Linux Mac)	2
CAB-AC	AC Power Cord (North America) C13 NEMA 5-15P 2.1m	2
ASA-PWR-AC	ASA 5545-X/5555-X AC Power Supply	2
ASA5500-ENCR-K9	ASA 5500 Strong Encryption License (3DES/AES)	2
ASA-ANYCONN-CSD-K9	ASA 5500 AnyConnect Client + Cisco Security Desktop Software	2
ASA-PWR-BLANK	ASA 5545-X/5555-X Power Slot Blank Cover	2

CRI-PO-L BOMs

This kit is based on the Nexus 7018 as the aggregation node and the Data Center Services Node and appliances for network services.

The Nexus 7018 aggregation nodes are deployed in pairs as listed in [Table 10](#). The Nexus 7000 scales up through additional line cards. Each Nexus 7018 has:

- Dual Sup2E
- Pair of M2 Series Line Card for southbound traffic

The Data Center Services Nodes are deployed in pairs as shown in [Table 11](#). Each DSN has:

- Dual VS-Sup720

- Dual 6708 Line Cards
- Dual ACE30 for load balancing for additional performance
- Dual ASA-SM for firewall for additional performance

The DSN scales up through additional feature licenses on the service modules and by adding additional service modules. For example, the ASA-SM is specified below with 20 security context licenses, which support up to 20 tenants. The ASA-SM scales up to 250 tenants by upgrading the number of licenses.

Remote access VPN is only offered as an appliance because there is no DSN service module with this functionality. A pair of ASA5585-X (with SSP20) is the recommended starting point for additional performance as shown in [Table 12](#). Choose different platforms or licensing based on services throughput, contexts and features needed for deployment.

Table 10 *CRI-PO-L Aggregation Layer with Cisco Nexus 7018*

Item Name	Description	Quantity
N7K-C7018	18 Slot Chassis No Power Supplies Fans Included	2
N7K-M224XP-23L	Nexus 7000 M2-Series 24 Port 10GE with XL Option (req. SFP+)	2
SFP-10G-SR	10GBASE-SR SFP Module	20
N7K-C7018-FAB-2	Nexus 7000 - 18 Slot Chassis - 110Gbps/Slot Fabric Module	6
N7K-AC-7.5KW-US	Nexus 7000 - 7.5KW AC Power Supply Module US (cable included)	4
N7K-C7018-FAN	Nexus 7000 - 18 Slot Fan	4
N7K-C7018-F-BLANK	Nexus 7018 Fabric Module Blank	4
N7KS2K9-61	Cisco NX-OS Release 6.1 for SUP2	2
N7K-LAN1K9	Nexus 7000 LAN Enterprise License (L3 protocols)	2
N7K-SUP2E	Nexus 7000 - Supervisor 2 Enhanced Includes 8GB USB Flash	2
N7K-USB-8GB	Nexus 7K USB Flash Memory - 8GB (Log Flash)	2
N7K-SUP2E	Nexus 7000 - Supervisor 2 Enhanced Includes 8GB USB Flash	2
N7K-USB-8GB	Nexus 7K USB Flash Memory - 8GB (Log Flash)	2
N7K-M224XP-23L	Nexus 7000 M2-Series 24 Port 10GE with XL Option (req. SFP+)	2
SFP-10G-SR	10GBASE-SR SFP Module	20

Table 11 *CRI-PO-L: Data Center Services Node for Network Services*

Item Name	Description	Quantity
WS-C6509-E	Catalyst 6500 Enhanced 9-slot chassis 15RU no PS no Fan Tray	2
WS-X6708-10G-3C	C6K 8 port 10 Gigabit Ethernet module with DFC3C (req. X2)	2
X2-10GB-SR	10GBASE-SR X2 Module	8
WS-X6708-10GE	Cat6500 8 port 10 Gigabit Ethernet module (req. DFC and X2)	2
WS-F6700-DFC3C	Catalyst 6500 Dist Fwd Card for WS-X67xx modules	2
ACE30-MOD-K9	Application Control Engine 30 Hardware	2
SC6K-A51-ACE	ACE30 module Software Release 5(1)	2
ACE30-MOD-04-K9	ACE30 Module with 4G 4G Comp 30K SSL TPS and 250VC	2

Table 11 *CRI-PO-L: Data Center Services Node for Network Services (continued)*

Item Name	Description	Quantity
VS-S720-10G-3C	Cat 6500 Supervisor 720 with 2 x 10GbE and 3x1GE MSFC3 PFC3C	2
BF-S720-64MB-RP	Bootflash for SUP720-64MB-RP	2
VS-F6K-MSFC3	Catalyst 6500 Multilayer Switch Feature Card (MSFC) III	2
VS-F6K-PFC3C	Catalyst 6500 Sup 720-10G Policy Feature Card 3C	2
VS-S720-10G	Catalyst 6500 Supervisor 720 with 2 10GbE ports	2
SV33AIK9-12233SXJ	Cisco CAT6000-VSS720 IOS ADVANCED IP SERVICES SSH	2
CF-ADAPTER-SP	SP adapter for SUP720 and SUP720-10G	2
MEM-C6K-CPTFL1GB	Catalyst 6500 Compact Flash Memory 1GB	2
X2-10GB-SR	10GBASE-SR X2 Module	4
VS-S720-10G-3C	Cat 6500 Supervisor 720 with 2 x 10GbE and 3x1GE MSFC3 PFC3C	2
BF-S720-64MB-RP	Bootflash for SUP720-64MB-RP	2
VS-F6K-MSFC3	Catalyst 6500 Multilayer Switch Feature Card (MSFC) III	2
VS-F6K-PFC3C	Catalyst 6500 Sup 720-10G Policy Feature Card 3C	2
VS-S720-10G	Catalyst 6500 Supervisor 720 with 2 10GbE ports	2
CF-ADAPTER-SP	SP adapter for SUP720 and SUP720-10G	2
MEM-C6K-CPTFL1GB	Catalyst 6500 Compact Flash Memory 1GB	2
X2-10GB-SR	10GBASE-SR X2 Module	4
WS-X6708-10G-3C	C6K 8 port 10 Gigabit Ethernet module with DFC3C (req. X2)	2
WS-X6708-10GE	Cat6500 8 port 10 Gigabit Ethernet module (req. DFC and X2)	2
WS-F6700-DFC3C	Catalyst 6500 Dist Fwd Card for WS-X67xx modules	2
X2-10GB-SR	10GBASE-SR X2 Module	8
WS-SVC-ASA-SM1-K9	ASA Services Module for Catalyst 6500-E 3DES/AES	2
SF-ASASM-8.5-K8	ASA Software 8.5 for Catalyst 6500-E ASASM 2 free VFW	2
ASA5500-ENCR-K9	ASA 5500 Strong Encryption License (3DES/AES)	2
MEM-C6K-APP-24GB	Cat6500 24GB Service Module Memory	2
SF-ASASM-ASDM-6.5	ASDM Software 6.5 for Catalyst 6500-E ASASM	2
WS-SVC-ASA-SM1	Base ASA Services Module PID for K8/K9	2
ASA5500-SC-20	ASA 5500 20 Security Contexts License	2
WS-CAC-6000W	Cat6500 6000W AC Power Supply	4
CAB-C19-CBN	Cabinet Jumper Power Cord 250 VAC 16A C20-C19 Connectors	8
WS-C6509-E-FAN	Catalyst 6509-E Chassis Fan Tray	2

Table 12 **CRI-PO-L: VPN Services**

Item Name	Description	Quantity
ASA5585-S20X-K9	ASA 5585-X Chas with SSP20 8GE 2SFP+ 2GE Mgt 2 AC 3DES/AES	2
ASA5585-SEC-PL	ASA 5585-X Security Plus License (Enables 10G SFP+ Ports)	2
ASA-AC-E-5585	AnyConnect Essentials VPN License - ASA 5585-X (Max Users)	2
ASA5585-PWR-AC	ASA 5585-X AC Power Supply	2
CAB-US515P-C19-US	NEMA 5-15 to IEC-C19 13ft US	4
ASA-SSP-20-INC	ASA 5585-X Security Services Processor-20 with 8GE	2
ASA5500-ENCR-K9	ASA 5500 Strong Encryption License (3DES/AES)	2
ASA5585-BLANK-HD	ASA 5585-X Hard Drive Blank Slot Cover	4
ASA5585-PWR-AC	ASA 5585-X AC Power Supply	2
ASA5585-BLANK-F	ASA 5585-X Full Width Blank Slot Cover	2
ASA-VPN-CLNT-K9	Cisco VPN Client Software (Windows Solaris Linux Mac)	2
SF-ASA5585-8.2-K8	ASA 5500 Series Software Version 8.2 for ASA 5585-X DES	2

Accessing the BOMs on CCW

The BOM listed above are available on the Cisco Commerce Workspace (CCW).

If you would like a copy of the BOMs shown in this document, which are in CCW, contact your Cisco or Partner sales team³.

Recommended Reading and URLs

1. Cisco VMDC public website, <http://www.cisco.com/go/vmdc>
2. Cisco VMDC partner website <http://www.cisco.com/go/vmdc> (click on For Partners)⁴
3. Cisco Virtualized Multi-Tenant Data Center, Version 2.2, Design Guide, http://www.cisco.com/en/US/docs/solutions/Enterprise/Data_Center/VMDC/2.2/design_guide/vmdcDesign22.html
4. Cisco Virtualized Multi-Tenant Data Center, Version 2.2, Implementation Guide, http://www.cisco.com/en/US/partner/docs/solutions/Enterprise/Data_Center/VMDC/2.2/implementation_guide/vmdcImplementationGuide22.html
5. Data Center Service Nodes, http://www.cisco.com/en/US/prod/collateral/switches/ps5718/ps708/design_guide_c07-606204.html
6. ASA5000 VPN, http://www.cisco.com/en/US/prod/collateral/vpndevc/ps6032/ps6094/ps6120/prod_brochure0900aecd80402e39.html
7. Partner Bundles and Promotions, http://www.cisco.com/web/partners/incentives_and_promotions/index.html

Additional information

Please email ask-vmdc-external@cisco.com with additional questions.

Acknowledgements

Author: Kevin Loo

3. The sales team can contact sac-support@cisco.com

4. Additional cisco.com authorization required.

