

## Cisco Network Planning Solution 2.0

### Cisco Network Planning Solution—Service Provider 2.0

Cisco® Network Planning Solution (NPS) and Cisco Network Planning Solution – Service Provider (NPS-SP) help enterprises and network service providers optimize network capacity and performance, maintain network resiliency even during unplanned changes, improve application and service continuity, plan for new technology deployments, and validate planned configuration changes. Cisco NPS and Cisco NPS-SP help reduce the risks associated with network growth, migration, and consolidation.

#### Product Overview

The network has become a critical business resource, and organizations need strategies that strengthen business continuity through improved network and application resilience while reducing operational expense. This includes the ability to predict, avoid, and lessen the effects of costly network and application service disruptions and the confidence to quickly adapt the network to changing business opportunities.


Cisco NPS and Cisco NPS-SP are key components of the Cisco Network Application Performance Analysis NAPA solution, an innovative combination of sophisticated management tools and services from Cisco that enable a holistic view of the interaction between network resources and application/service performance. Cisco NAPA solution redefines how enterprises can monitor and analyze application performance while proactively planning for changing network requirements. Cisco NPS and Cisco NPS-SP provide powerful analysis tools for the planning and design phases of the network lifecycle.

Cisco NPS and Cisco NPS-SP are vital tools for improving network availability as well as the continuity of applications and services. It operates on a high-fidelity software model of the production network, accurately simulating the behavior of routers, switches, firewalls, and applications to enable a broad range of change impact (“what-if”) analyses. Actionable information derived from analysis is used to make automated or guided configuration changes in the network. Using Cisco NPS and Cisco NPS-SP removes the guesswork in the rollout of new applications and services, reduces costs by eliminating manual and time-consuming tasks, and can lower capital expenses. With Cisco NPS and Cisco NPS-SP you can:

- Plan for network and traffic growth, consolidation, and migration
- Automatically size links for network performance and resilience
- Plan for new technologies such as VPNs and voice over IP (VoIP)
- Forecast traffic based on trends
- Predict the impact of node and link failures on traffic flows and resource usage
- Optimize network topology for projected growth
- Plan for deployment of Multiprotocol Label Switching (MPLS)–based Traffic Engineering (with Cisco NPS-SP)

Cisco NPS and Cisco NPS-SP provide a graphical view of the network topology (Figure 1), with the ability to access detailed information about node and link attributes. The network model can be modified through the GUI to predict the impact of changes in topology, device configuration, and traffic. Configuration changes can also be introduced into the model through a Cisco IOS® Software command-line interface (CLI). Study results from Cisco NPS and Cisco NPS-SP are provided in Web (HTML), Microsoft Word (.rtf), or Extensible Markup Language (XML) reports.

**Figure 1.** Network Topology View from Cisco NPS

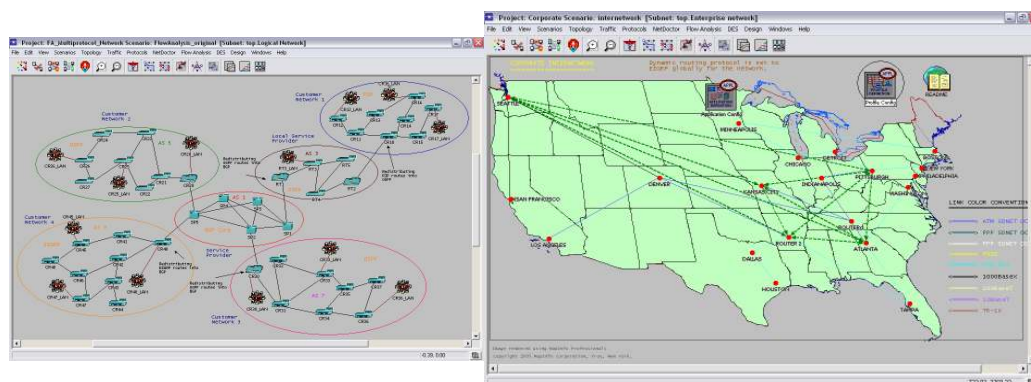

## Key Features and Benefits

### Advanced Network Planning and Analysis

Cisco NPS and Cisco NPS-SP accurately model a broad range of Layer 2 and Layer 3 technologies, Cisco devices, and third-party devices. Link utilization or end-to-end flow data can be introduced into the network model to perform accurate traffic-flow simulations. Multilayer survivability analysis determines which traffic flows will be most affected by outages and where resulting bottlenecks are likely to occur in a network. You can subject the entire network to an automated “reachability” analysis to identify potential connectivity problems. Cisco NPS and Cisco NPS-SP also help you predict the impact of deploying new technologies, protocols, or hosted applications, including VPNs, VLANs, and more. For example, a VoIP readiness assessment wizard guides you through a step-by-step analysis, scoring the network’s readiness for VoIP deployment. Services analysis demonstrates the impact of change on end-to-end services.

### Automated Network Design and Optimization

Cisco NPS and Cisco NPS-SP feature an integrated design framework with standard, configurable models for common design operations. Configurable design actions can be parameterized, sequenced, and saved for repeated execution as a compound task.

- Capacity planning analyzes trends in the current traffic patterns and projects future traffic loads.
- Resilient link dimensioning determines the optimum network-wide link capacity in an existing topology to support projected traffic flows under normal and failure conditions. A failure case can encompass selected links, nodes, and shared risk groups.
- Topology design determines link placement for a ring backbone, a spanning tree, or dual spanning trees. Topology design actions can be used to design new networks as well as perform incremental expansion of an existing network.

- Quality of service (QoS) planning automatically sets IP QoS parameters and sizes the queue bandwidths or weights on IP interfaces based on the queue load and queue configuration rules.
- MPLS Traffic Engineering automates planning for initial deployment of MPLS Label-Switched paths (LSPs) for traffic engineering through Cisco NPS-SP.

## Optional Modules and Solutions

### Cisco NPS – Network Validation Module (NPS-NVM)

Proposed network changes can be validated before deploying them. The optional Cisco NPS – Network Validation Module (NPS-NVM) provides a powerful rules-based engine that systematically checks the entire network model, diagnosing device misconfigurations, errors, policy violations, and inefficiencies. Cisco NPS-NVM processes and interprets device configurations the same way that production network devices do during operation. Expert knowledge of network devices, protocols, and routing behavior enables networkwide analysis of connectivity and resiliency, unlike other analysis tools that are limited to simple syntax checks on a single device at a time. A Port Scan analysis of network security detects gaps in network defenses. Customizable reports can demonstrate compliance with regulatory and IT governance requirements, such as the Sarbanes-Oxley Act, the Health Insurance Portability and Accountability Act of 1996 (HIPAA), the Federal Information Security Management Act (FISMA), Payment Card Industry (PCI) Data Security Standard, and others.

Cisco NPS-NVM is provided with hundreds of standard checks that reflect industry best practices published by Cisco, U.S. government agencies, and others. Rules are provided with source code, sample policy templates, and an integrated authoring environment to help incorporate your organization's best practices. Standard checks encompass:

- IP addressing and routing
- Protocol configurations, including Routing Information Protocol (RIP), Open Shortest Path First (OSPF), Interior Gateway Routing Protocol (IGRP), Enhanced IGRP (EIGRP), and Border Gateway Protocol (BGP)
- Route maps and access control lists (ACLs)
- Hot Standby Router Protocol (HSRP)
- Simple Network Management Protocol (SNMP), system logging, and router administration
- Firewall configurations and security protocols including authentication, authorization, and accounting (AAA), Kerberos Protocol, Network Address Translation (NAT), RADIUS, and TACACS+
- VPNs, tunnels, and VLANs
- QoS and more

Cisco NPS-NVM is provided as an integrated component of Cisco NPS-SP.

### Cisco Virtual Network Data Server (VNDS)

Cisco Virtual Network Data Server (VNDS) is a complementary solution that automatically maintains a detailed data model of the production network, including topology, configuration, and traffic. It collects and intelligently merges detailed network data from a broad range of sources, reconciling conflicts based on user-configurable priorities. Information can be obtained online from network devices including Cisco routers, Cisco CRS-1 Carrier Routing System, Cisco Catalyst®

switches, the Cisco PIX® security appliance, and devices from many other vendors. Built-in software intelligence also allows data to be imported from CiscoWorks LAN Management Solution (LMS), CiscoWorks Network Compliance Manager, Cisco WAN Manager, Cisco CNS NetFlow Collection Engine, and numerous third-party sources.

## Service Providers

Cisco NPS-SP is designed to address the demands of service provider network environments. Cisco NPS-SP provides all the functionality of Cisco NPS in addition to Cisco NPS-NVM for network-aware configuration analysis, and it supports MPLS modeling and analysis, Intermediate System-to-Intermediate System (IS-IS), IPv6, and Cisco Carrier Routing System-1 Cisco IOS XR Software-based device modeling, planning, and analysis (requires Cisco VNDS).

## System Requirements

Cisco NPS and Cisco NPS-SP are typically implemented on the user desktop. The Cisco VNDS is generally implemented on a dual-processor platform with the prerequisite database environment. Table 1 lists the system requirements for Cisco NPS/Cisco NPS-SP and Cisco VNDS.

**Table 1.** System Requirements

|   | Cisco NPS/Cisco NPS-SP   | Cisco VNDS   |
|---|--|--|
| <b>Disk space</b>   | 20 GB  | 160 GB (or larger depending on network size and data-retention practices)  |
| <b>Hardware</b>   | Intel Pentium 3, 4, Xeon or equivalent 1.5+ GHz (Windows)<br>Sun Ultrasparc II or III (Solaris)  | Dual 3.4+ GHz Intel Pentium D or Xeon with 1066 MHz front-side bus (FSB)   |
| <b>Memory</b>   | 1 GB (minimum)   | 4 GB (minimum)   |
| <b>Software</b>   | Only English-language versions are supported: <ul style="list-style-type: none"> <li>• Windows Server 2003, Windows Server 2003 x64 Edition, and Windows Server 2003 R2 x64 Edition</li> <li>• Windows 2000 Server and Windows Server 2003 R2</li> <li>• Windows XP Professional and Windows XP Professional x64 Edition</li> <li>• Windows 2000 Professional</li> <li>• Solaris 8</li> <li>• Solaris 9</li> <li>• Solaris 10</li> <li>• Red Hat Enterprise Linux 3 (V2.4 Kernel)</li> <li>• Red Hat Enterprise Linux 4 (V2.6 Kernel)</li> </ul> | Only English-language versions are supported: <ul style="list-style-type: none"> <li>• Windows Server 2003</li> <li>• Windows 2000 Server</li> <li>• Windows XP Professional</li> <li>• Windows 2000 Professional</li> <li>• Red Hat Enterprise Linux 3 (V2.4 Kernel)</li> <li>• Red Hat Enterprise Linux 4 (V2.6 Kernel)</li> </ul> |
| <b>Prerequisites<br/>(not included with Cisco NPS or Cisco NPS-SP 2.0 )</b> |  | Only English-language versions are supported: <ul style="list-style-type: none"> <li>• Oracle 9i Release 2 Database (9.2.0.1 or higher) or Oracle 10g Release 2 (10.2.0.1 or higher)</li> <li>• Oracle 9i Application Server TopLink patched to Release 9.0.3.5</li> </ul>   |

## Ordering Information

Cisco Network Planning Solution 2.0 and Cisco Network Planning Solution – Service Provider 2.0 are available for purchase through regular Cisco sales and distribution channels worldwide. To place an order, contact your Cisco representative or visit <http://www.cisco.com>.

Cisco Network Planning Solution 2.0 and Cisco Network Planning Solution – Service Provider 2.0 licensing options are described in the Cisco Network Planning Solution 2.0/Cisco Network Planning Solution – Service Provider 2.0 product bulletin, viewed at [http://www.cisco.com/en/US/products/ps6362/prod\\_bulletins\\_list.html](http://www.cisco.com/en/US/products/ps6362/prod_bulletins_list.html).

## Service and Support

Cisco delivers a wide range of services programs through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you to protect your network investment, optimize network operations, and prepare the network for new applications to extend network intelligence and the power of your business. For more information about Cisco services, contact your Cisco representative or visit <http://www.cisco.com>.

## For More Information

For more information about Cisco Network Planning Solution and Cisco Network Planning Solution – Service Provider, contact your Cisco representative or visit <http://www.cisco.com/en/US/products/ps6363/index.html>.



**Americas Headquarters**  
Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
[www.cisco.com](http://www.cisco.com)  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0883

**Asia Pacific Headquarters**  
Cisco Systems, Inc.  
168 Robinson Road  
#28-01 Capital Tower  
Singapore 068912  
[www.cisco.com](http://www.cisco.com)  
Tel: +65 6317 7777  
Fax: +65 6317 7799

**Europe Headquarters**  
Cisco Systems International BV  
Haarlerbergpark  
Haarlerbergweg 13-19  
1101 CH Amsterdam  
The Netherlands  
[www-europe.cisco.com](http://www-europe.cisco.com)  
Tel: +31 0 800 020 0791  
Fax: +31 0 20 357 1100

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

©2007 Cisco Systems, Inc. All rights reserved. CCVP, the Cisco logo, and the Cisco Square Bridge logo are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn is a service mark of Cisco Systems, Inc.; and Access Registrar, Aironet, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, Follow Me Browsing, FormShare, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, iPhone, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, LightStream, Linksys, MeetingPlace, MGX, Networking Academy, Network Registrar, Packet, PIX, ProConnect, RateMUX, ScriptShare, SlideCast, SMARTnet, StackWise, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0701R)