


Cisco CRS Series 42 Port Gigabit Ethernet Interface Module

The Cisco® CRS-1 Carrier Routing System is the industry's first carrier router offering continuous system operation, unprecedented service flexibility, and system longevity. The Cisco CRS-1 is powered by Cisco IOS® XR Software – a unique self-healing, distributed operating system. As part of a video-enabled, IP Next-Generation Network (NGN), the Cisco CRS-1 Series platform delivers continuous, always-on operation that easily scales to support the massive bandwidth requirements of visual networking experiences such as high-definition IPTV and Cisco TelePresence®. These services demand a platform that delivers predictable forwarding performance and efficient, intelligent, fabric-based multicast replication. The Cisco CRS-1 Series helps enable the Internet and NGNs to handle the approaching zettabyte era of carrier IP communications while protecting network investments for decades to come.

Product Overview

The Cisco CRS Series 42 Port Gigabit Ethernet Interface Module (Figure 1) provides 42 line-rate, IEEE 802.3-compliant Gigabit Ethernet interfaces. Physical interface characteristics can be selected using different modular Small Form-Factor Pluggable (SFP) optics – short, long, extra long, and copper interfaces are supported. Extensive per-port and per-VLAN counters simplify network performance monitoring and troubleshooting.

Figure 1. Cisco CRS Series 42 Port Gigabit Ethernet Interface Module

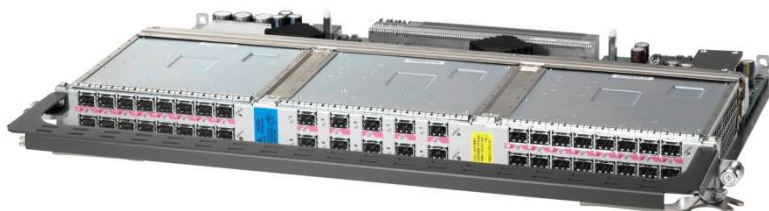

Features and Benefits

- 42 line-rate Gigabit Ethernet (GE) full duplex interfaces
- Per-port flexibility for interface distance – selected using the appropriate SFP optical or copper modules
- Compatible with all Cisco CRS Series chassis
- Supports in-use insertion and removal without the need to power down the chassis
- Simple configuration, monitoring, and maintenance

Product Specifications

Table 1. Product Specifications

Feature	Description
Chassis compatibility	Compatible with all Cisco CRS-1 and CRS-3 chassis Requires one of the following forwarding engines (for CRS-1 chassis): CRS-FP40 (on CRS-4/S and CRS-8/S only), CRS-MS-40G-B (on CRS-4/S, CRS-8/S, CRS-16/S, and CRS Multi-chassis)
Software compatibility	Cisco IOS XR Software Release 3.8.1 or later for CRS-1 Cisco IOS XR Software Release 4.0.0 or later for CRS-3
Port density	Forty-two ports of Gigabit Ethernet per card, each using SFP physical interfaces SFPs supported: <ul style="list-style-type: none">• Short wavelength (SX)• Long reach/long haul (LX/LH)• Extended distance (ZX) SFP• Copper (RJ-45) SFP-GE-T
Ethernet	Encapsulations: ARPA, IEEE 802.2/SAP, IEEE 802.3/SNAP IEEE 802.3x flow control Jumbo frames (9188 bytes) IEEE 802.1p tagging Source and destination MAC accounting and VLAN accounting Autonegotiation Full-duplex operation 802.1Q VLAN termination Per-port byte and packet counters for policy drops; oversubscription drops; cyclic redundancy check (CRC) error drops; packet sizes; and unicast, multicast, and broadcast packets Per-VLAN byte and packet counters for policy drops, oversubscription drops, and unicast, multicast, and broadcast packets Per-port byte counters for good bytes and dropped bytes
LED indicators	Shared port adaptor (SPA) status: Bicolor green and amber LEDs encode the SPA status as follows: <ul style="list-style-type: none">• LED off: SPA is powered off• LED amber: SPA is powered on and initializing• LED green: SPA is powered on and operational In addition to the status LED, the SPAs also have a bicolor, surface-mount, right-angle LED dedicated to each port to indicate port status. The green and amber LEDs encode the port status as follows: <ul style="list-style-type: none">• LED off: Port is not enabled by software• LED: Port is enabled by software, but there is a problem with the Ethernet link• LED green: Port is enabled by software, and there is a valid Ethernet link
Reliability and availability	Online insertion and removal (OIR) without affecting system traffic Field-replaceable SFP optical modules
Network management	Cisco IOS XR Software command-line interface (CLI) Simple Network Management Protocol (SNMP) Extensible Markup Language (XML) interface
Physical dimensions	Occupies one physical layer interface module (PLIM) slot Weight: 8.4 lbs (3.8 kg) Height: 20.6 in. (52.2 cm) Depth: 11.2 in. (28.4 cm) Width: 1.8 in. (4.49 cm)
Power	150W

Feature	Description
Environmental conditions	<p>Storage temperature: –40 to 70°C (–40 to 158°F)</p> <p>Operating temperature:</p> <p>Normal: 5 to 40°C (41 to 104°F)</p> <p>Short-term: –5 to 50°C (23 to 122°F)</p> <p>Relative humidity:</p> <p>Normal: 5% to 85%</p> <p>Short-term: 5% to 90% but not to exceed 0.024 kg water/kg of dry air</p> <p>Short-term refers to a period of not more than 96 consecutive hours and a total of not more than 15 days in one year. (This refers to a total of 360 hours in any given year, but no more than 15 occurrences during that 1-year period.)</p>

Approvals and Compliance

Table 2. Compliance and Agency Approvals

Feature	Description
Safety standards	<p>UL/CSA/IEC/EN 60950-1</p> <p>IEC/EN 60825 Laser Safety</p> <p>ACA TS001</p> <p>AS/NZS 60950</p> <p>FDA – Code of Federal Regulations Laser Safety</p>
Electromagnetic interference (EMI)	<p>FCC Class A</p> <p>ICES 003 Class A</p> <p>AS/NZS 3548 Class A</p> <p>CISPR 22 (EN55022) Class A</p> <p>VCCI Class A</p> <p>BSMI Class A</p> <p>IEC/EN 61000-3-2: Power line harmonics</p> <p>IEC/EN 61000-3-3: Voltage fluctuations and flicker</p>
Immunity (basic standards)	<p>IEC/EN-61000-4-2: Electrostatic discharge immunity (8 kV contact, 15 kV air)</p> <p>IEC/EN-61000-4-3: Radiated immunity (10 V/m)</p> <p>IEC/EN-61000-4-4: Electrical fast transient immunity (2 kV power, 1 kV signal)</p> <p>IEC/EN-61000-4-5: Surge AC port (4 kV CM, 2 kV DM)</p> <p>IEC/EN-61000-4-5: Signal ports (1 kV)</p> <p>IEC/EN-61000-4-5: Surge DC port (1 kV)</p> <p>IEC/EN-61000-4-6: Immunity to conducted disturbances (10 Vrms)</p> <p>IEC/EN-61000-4-8: Power frequency magnetic field immunity (30 A/m)</p> <p>IEC/EN-61000-4-11: Voltage dips, short interruptions, and voltage variations</p>
ETSI and EN	<p>EN300 386: Telecommunications Network Equipment (EMC)</p> <p>EN55022: Information Technology Equipment (Emissions)</p> <p>EN55024: Information Technology Equipment (Immunity)</p> <p>EN50082-1/EN-61000-6-1: Generic Immunity Standard</p>
Network equipment building systems (NEBS)	<p>This product is designed to meet the following requirements (qualification in progress):</p> <p>SR-3580: NEBS Criteria Levels (Level 3)</p> <p>GR-1089-CORE: NEBS EMC and Safety</p> <p>GR-63-CORE: NEBS Physical Protection</p>

Additional Specifications

Table 3. Optical Specifications: Modular SFP Optics

Gigabit Ethernet SFP Optics	Maximum Distance
SX SFP optics	1804 ft (550 m)
LX/LH SFP optics	6.2 mi (10 km)
ZX SFP optics	43.5 mi (70 km)
Copper (RJ-45) SFP optics	328 ft (100 m)

Ordering Information

To place an order, visit the [Cisco Ordering Home Page](#).

Table 4. Ordering Information

Product Part Number	Product Name
42-1GE(=)	Cisco CRS-1 Series 42x1GE Interface Module
SFP-GE-S(=)	Cisco Extended Temperature 1000BASE-SX short wavelength; with DOM
SFP-GE-L(=)	Cisco Extended Temperature 1000BASE-LX/LH long-wavelength; with DOM
SFP-GE-Z(=)	Cisco Extended Temperature 1000BASE-ZX extended distance; with DOM
SFP-GE-T(=)	Cisco Extended Temperature 1000BASE-T NEBS 3 ESD
GLC-SX-MMD(=)	Cisco Extended Temperature 1000BASE-SX short wavelength; with DOM
GLC-LH-SMD(=)	Cisco Extended Temperature 1000BASE-LX/LH long-wavelength; with DOM
GLC-ZX-SMD(=)	Cisco Extended Temperature 1000BASE-ZX extended distance; with DOM

End-of-Sale and End-of-Life Announcement for the Select Cisco Gigabit Ethernet SFP Modules:

http://www.cisco.com/en/US/prod/collateral/modules/ps5455/eol_c51-698060.html

Service and Support

Cisco offers numerous innovative services programs to accelerate customer success. These programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you to protect your network investment, optimize network operations, and prepare the network for new applications to extend network intelligence and the power of your business. For more information about Cisco services, see [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

For More Information

For more information about the Cisco CRS Series 42 Port Gigabit Ethernet Interface Module, contact your local account representative or visit www.cisco.com/go/crs.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Printed in USA

C78-553672-02 04/12